



## MULTI-CHANNEL LCD GAMMA CORRECTION BUFFER

### FEATURES

- **Gamma Correction Channels: 10, 6**
- **Integrated  $V_{COM}$  Buffer**
- **Excellent Output Current Drive:**
  - **Gamma Channels: > 30mA at 0.5V Swing to Rails<sup>(1)</sup>**
  - **$V_{COM}$ : > 150mA at 5V Swing to Rails<sup>(1)</sup>**
- **Large Capacitive Load Drive Capability**
- **Rail-to-Rail Output**
- **PowerPAD Package**
- **Low-Power/Channel: < 340 $\mu$ A**
- **Wide Supply Range: 4.5V to 16V**
- **Specified for 0°C to 85°C**
- **High ESD Rating: 4kV**

<sup>(1)</sup> See typical characteristic curves for detail.

MODEL	GAMMA CHANNELS	VCOM CHANNELS
BUF11702	10	1
BUF07702 <sup>(1)</sup>	6	1

<sup>(1)</sup> The BUF07702 is not recommended for new designs. Information is provided for reference only. For new designs, the pin-compatible BUF07703 is recommended; more information can be found at [www.ti.com](http://www.ti.com).

### DESCRIPTION

The BUFxx702 are a series of multi-channel buffers targeted towards gamma correction in high-resolution LCD panels. The number of gamma correction channels required depends on a variety of factors and differs greatly from design to design. Therefore, various channel options are offered. For additional space and cost savings, a  $V_{COM}$  channel with higher current drive capability is integrated in the BUF11702 and BUF07702.

The various buffers within the BUFxx702 are carefully matched to the voltage I/O requirements for the gamma correction application. Each buffer is capable of driving heavy capacitive loads and offers fast load current switching. The  $V_{COM}$  channel has increased output drive of > 100mA and can handle even larger capacitive loads.

The BUF07702 and BUF11702 is available in the TSSOP-PowerPAD™ package for dramatically increased power dissipation capability. This way, a large number of channels can be handled safely in one package.

A flow-through pinout has been adopted to allow simple PCB routing and maintain the cost-effectiveness of this solution. All inputs and outputs of the BUFxx702 incorporate internal ESD protection circuits that prevent functional failures at voltages up to 4kV (HBM) as tested under MIL-STD-883C Method 3015.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments Incorporated. All other trademarks are the property of their respective owners.

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range unless otherwise noted<sup>(1)</sup>

PARAMETERS	BUFXX702	UNIT
Supply, $V_{DD}$ <sup>(2)</sup>	16.5	V
Input Voltage Range, $V_I$	$V_{DD}$	V
Continuous Total Power Dissipation	See Dissipation Rating Table	
Operating Free-Air Temperature Range, $T_A$	0 to 85	°C
Maximum Junction Temperature, $T_J$	150	°C
Storage Temperature Range, $T_{STG}$	–65 to 150	°C
Lead Temperature 1.6mm (1/16 inch) from case for 10s	260	°C

(1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltage values are with respect to GND.

## ORDERING INFORMATION

PRODUCT	PACKAGE-LEAD	PACKAGE DESIGNATOR <sup>(1)</sup>	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	TRANSPORT MEDIA, QUANTITY
BUF11702	TSSOP–28	PWP	0°C to +85°C	BUF11702PWP	Tube, 50
BUF11702	TSSOP–28	PWP	0°C to +85°C	BUF11702PWPR	Reels, 2000
BUF07702 <sup>(2)</sup>	TSSOP–20	PWP	0°C to +85°C	BUF07702PWP	Tube, 70
BUF07702 <sup>(2)</sup>	TSSOP–20	PWP	0°C to +85°C	BUF07702PWPR	Reels, 2000

(1) For the most current specification and package information, refer to the Package Option Addendum at the end of this data sheet.

(2) The BUF07702 is not recommended for new designs. For new designs, the pin-compatible BUF07703 is recommended.

## DISSIPATION RATING TABLE

PACKAGE TYPE	PACKAGE DESIGNATOR	$\theta_{JC}$ (°C/W)	$\theta_{JA}$ <sup>(1)</sup> (°C/W)	$T_A \leq 25^\circ\text{C}$ <sup>(2)</sup> POWER RATING
TSSOP–28	PWP (28)	0.72	27.9	3.5 W
TSSOP–20 <sup>(3)</sup>	PWP (20)	1.40	26.1	3.8 W

(1) With 2oz trace and PowerPAD soldered to copper landing pad.


(2)  $T_J = 125^\circ\text{C}$ .

(3) The BUF07702 is not recommended for new designs. For new designs, the pin-compatible BUF07703 is recommended.

## RECOMMENDED OPERATING CONDITIONS

	MIN	NOM	MAX	UNIT
Supply Voltage, $V_{DD}$	4.5		16	V
Operating Free-Air Temperature, $T_A$	0		85	°C

## EQUIVALENT SCHEMATICS OF INPUTS AND OUTPUTS

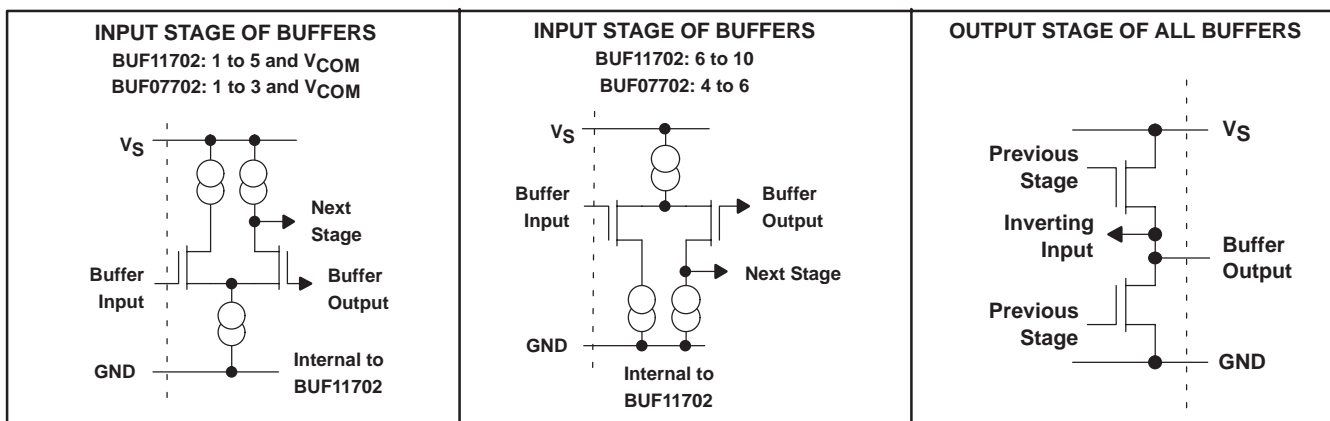

## ELECTRICAL CHARACTERISTICS

Over operating free-air temperature range, V<sub>DD</sub> = 4.5V to 16V, T<sub>A</sub> = 25°C, unless otherwise noted.

PARAMETER			TEST CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
V <sub>IO</sub>	Input offset voltage		V <sub>I</sub> = V <sub>DD</sub> /2, R <sub>S</sub> = 50 Ω	25°C		1.5	12	mV
				Full Range(1)			15	
I <sub>IB</sub>	Input bias current		V <sub>I</sub> = V <sub>DD</sub> /2	25°C		1		pA
				Full Range(1)		200		
k <sub>SVR</sub>	Supply voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> )		V <sub>DD</sub> = 4.5 V to 16 V	25°C	62	80		dB
				Full Range(1)	60			
Buffer gain			V <sub>I</sub> = 5 V	25°C		0.9995		V/V
BW_3dB	3dB bandwidth	Gamma buffers V <sub>COM</sub> buffer	C <sub>L</sub> = 100 pF, R <sub>L</sub> = 2 kΩ	25°C		1 0.6		MHz
SR	Slew rate	Gamma buffers V <sub>COM</sub> buffer	C <sub>L</sub> = 100 pF, R <sub>L</sub> = 2 kΩ V <sub>IN</sub> = 2V to 8V	25°C		1 0.7		V/μs
	Transient load regulation		I <sub>O</sub> = 0 to ±5 mA, V <sub>O</sub> = 5 V C <sub>L</sub> = 100 pF t <sub>T</sub> = 0.1 μs	25°C		900		mV
	Transient load response		See Figure 2	25°C		160		mV
t <sub>S</sub> (I-sink)	Settling time-current		I <sub>O</sub> = 0 to -5 mA V <sub>O</sub> = 5 V C <sub>L</sub> = 100 pF R <sub>L</sub> = 2 kΩ	Full Range(1)		1		μs
t <sub>S</sub> (I-src)	Settling time-current		I <sub>O</sub> = 0 to +5 mA V <sub>O</sub> = 5 V C <sub>L</sub> = 100 pF R <sub>L</sub> = 2 kΩ	Full Range(1)		2		μs
t <sub>S</sub>	Settling time-voltage	Gamma buffers	V <sub>I</sub> = 4.5 V to 5.5 V 0.1% V <sub>I</sub> = 5.5 V to 4.5 V 0.1%	25°C		6 4.6		μs
		V <sub>COM</sub> buffer	V <sub>I</sub> = 4.5 V to 5.5 V 0.1% V <sub>I</sub> = 5.5 V to 4.5 V 0.1%			5.8 5.6	μs	
V <sub>n</sub>	Noise voltage	Gamma buffers V <sub>COM</sub> buffer	V <sub>I</sub> = 5 V f = 1 kHz	25°C		45 40		nV/Hz
	Crosstalk		V <sub>I</sub> P-P = 6 V, f = 1 kHz	25°C		85		dB

(1) Full Range is 0°C to 85°C.

## ELECTRICAL CHARACTERISTICS: BUF11702

Over operating free-air temperature range,  $V_{DD} = 4.5V$  to  $16V$ ,  $T_A = 25^\circ C$ , unless otherwise noted.

PARAMETER			TEST CONDITIONS		T <sub>A</sub> (1)	MIN	TYP	MAX	UNIT
I <sub>DD</sub>	Supply current	ALL	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>I</sub> = V <sub>DD</sub> /2, V <sub>DD</sub> = 10 V		25°C		2.5	3.7	mA
					Full Range			5.5	
Common-mode input range		Buffers 1–5			25°C	1		V <sub>DD</sub>	V
		Buffers 6–10				0		V <sub>DD</sub> –1	
		V <sub>COM</sub> buffer				1		V <sub>DD</sub>	
Load regulation		V <sub>COM</sub> buffer sinking	V <sub>DD</sub> = 10 V, I <sub>O</sub> = 1 mA to 30 mA	25°C		1	1.2	mV/mA	
				Full Range			2.5		
		V <sub>COM</sub> buffer sourcing	V <sub>DD</sub> = 10 V, I <sub>O</sub> = –1 mA to –30 mA	25°C		1	1.2		
				Full Range			2.5		
		Buffers 1–10 sinking	V <sub>DD</sub> = 10 V, I <sub>O</sub> = 1 mA to 10 mA	25°C		0.85	1		
				Full Range			1.5		
		Buffers 1–10 sourcing	V <sub>DD</sub> = 10 V, I <sub>O</sub> = –1 mA to –10 mA	25°C		0.85	1		
				Full Range			1.5		
V <sub>OSH1</sub>	High-level saturated output voltage	Buffer 1	V <sub>DD</sub> = 16V, V <sub>I</sub> = 16V, I <sub>O</sub> = –5mA,	25°C	15.85	15.9	V		
				Full range	15.8				
V <sub>OSL10</sub>	Low-level saturated output voltage	Buffer 10	V <sub>DD</sub> = 16 V, V <sub>I</sub> = 0 V, I <sub>O</sub> = 5 mA,	25°C		0.1	0.15	V	
				Full range			0.2		
V <sub>OH1</sub>	High-level output voltage	Buffer 1	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 9.8 V, I <sub>O</sub> = –10 mA,	25°C	9.75	9.8	V		
Full range				9.7					
V <sub>OH2/3/4/5</sub>		Buffer 2/3/4/5	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 9.5 V, I <sub>O</sub> = –10 mA,	25°C	9.45	9.5	V		
				Full range	9.4				
V <sub>OH6/7/8/9</sub>		Buffer 6/7/8/9	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 8 V, I <sub>O</sub> = –10 mA,	25°C	7.95	8	V		
				Full range	7.9				
V <sub>OH10</sub>		Buffer 10	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 8 V, I <sub>O</sub> = –10 mA,	25°C	7.95	8	V		
				Full range	7.9				
V <sub>OHCOM</sub>	V <sub>COM</sub> buffer	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 8 V, I <sub>O</sub> = –30 mA,	25°C	7.95	8	V			
			Full range	7.9					
V <sub>OL1</sub>	Low-level output voltage	Buffer 1	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 2 V, I <sub>O</sub> = 10 mA,	25°C		2	2.05	V	
				Full range			2.1		
V <sub>OL2/3/4/5</sub>		Buffer 2/3/4/5	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 2 V, I <sub>O</sub> = 10 mA,	25°C		2	2.05	V	
				Full range			2.1		
V <sub>OL6/7/8/9</sub>		Buffer 6/7/8/9	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 0.5 V, I <sub>O</sub> = 10 mA,	25°C		0.5	0.55	V	
				Full range			0.6		
V <sub>OL10</sub>		Buffer 10	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 0.2 V, I <sub>O</sub> = 10 mA,	25°C		0.2	0.25	V	
				Full range			0.3		
V <sub>OLCOM</sub>		V <sub>COM</sub> buffer	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 2 V, I <sub>O</sub> = 30 mA,	25°C		2	2.05	V	
				Full range			2.1		

(1) Full Range is  $0^\circ C$  to  $85^\circ C$ .


## ELECTRICAL CHARACTERISTICS: BUF07702

Over operating free-air temperature range,  $V_{DD} = 4.5V$  to  $16V$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


PARAMETER			TEST CONDITIONS	T <sub>A</sub> (1)	MIN	TYP	MAX	UNIT
I <sub>DD</sub>	Supply current	ALL	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>I</sub> = V <sub>DD</sub> /2 V <sub>DD</sub> = 10V	25°C		2.5	3.7	mA
				Full Range			5.5	mA
Common-mode input range		Buffers 1–3		25°C	1		V <sub>DD</sub>	V
		Buffers 4–6			0		V <sub>DD</sub> –1	
		V <sub>COM</sub> buffer			1		V <sub>DD</sub>	
Load regulation		V <sub>COM</sub> buffer sinking	V <sub>DD</sub> = 10 V, I <sub>O</sub> = 1 mA to 30 mA	25°C		1	1.2	mV/mA
				Full Range			2.5	
		V <sub>COM</sub> buffer sourcing	V <sub>DD</sub> = 10 V, I <sub>O</sub> = –1 mA to –30 mA	25°C		1	1.2	
				Full Range			2.5	
		Buffers 1–6 sinking	V <sub>DD</sub> = 10 V, I <sub>O</sub> = 1 mA to 10 mA	25°C		0.85	1	
				Full Range			1.5	
		Buffers 1–6 sourcing	V <sub>DD</sub> = 10 V, I <sub>O</sub> = –1 mA to –10 mA	25°C		0.85	1	
				Full Range			1.5	
V <sub>OSH1</sub>	High-level saturated output voltage	Buffer 1	V <sub>DD</sub> = 16 V, V <sub>I</sub> = 16 V	25°C	15.85	15.9	V	
				Full range	15.8			
V <sub>OSL6</sub>	Low-level saturated output voltage	Buffer 6	V <sub>DD</sub> = 16 V, V <sub>I</sub> = 0 V	25°C		0.1	0.15	V
				Full range			0.2	
V <sub>OH1</sub>	High-level output voltage	Buffer 1	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 9.8 V	25°C	9.75	9.8	V	
Full range				9.7				
V <sub>OH2/3</sub>		Buffer 2/3	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 9.5 V	25°C	9.45	9.5	V	
				Full range	9.4			
V <sub>OH4/5</sub>		Buffer 4/5	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 8 V	25°C	7.95	8	V	
				Full range	7.9			
V <sub>OH6</sub>		Buffer 6	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 8 V	25°C	7.95	8	V	
				Full range	7.9			
V <sub>OHCOM</sub>		V <sub>COM</sub> buffer	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 8 V	25°C	7.95	8	V	
				Full range	7.9			
V <sub>OL1</sub>	Low-level output voltage	Buffer 1	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 2 V	25°C		2	2.05	V
				Full range			2.1	
V <sub>OL2/3</sub>		Buffer 2/3	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 2 V	25°C		2	2.05	V
				Full range			2.1	
V <sub>OL4/5</sub>		Buffer 4/5	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 0.5 V	25°C		0.5	0.55	V
				Full range			0.6	
V <sub>OL6</sub>		Buffer 6	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 0.2 V	25°C		0.2	0.25	V
				Full range			0.3	
V <sub>OLCOM</sub>		V <sub>COM</sub> buffer	V <sub>DD</sub> = 10 V, V <sub>I</sub> = 2 V	25°C		2	2.05	V
				Full range			2.1	

(1) Full Range is  $0^\circ C$  to  $85^\circ C$ .

**BUF11702 Pin Configuration**

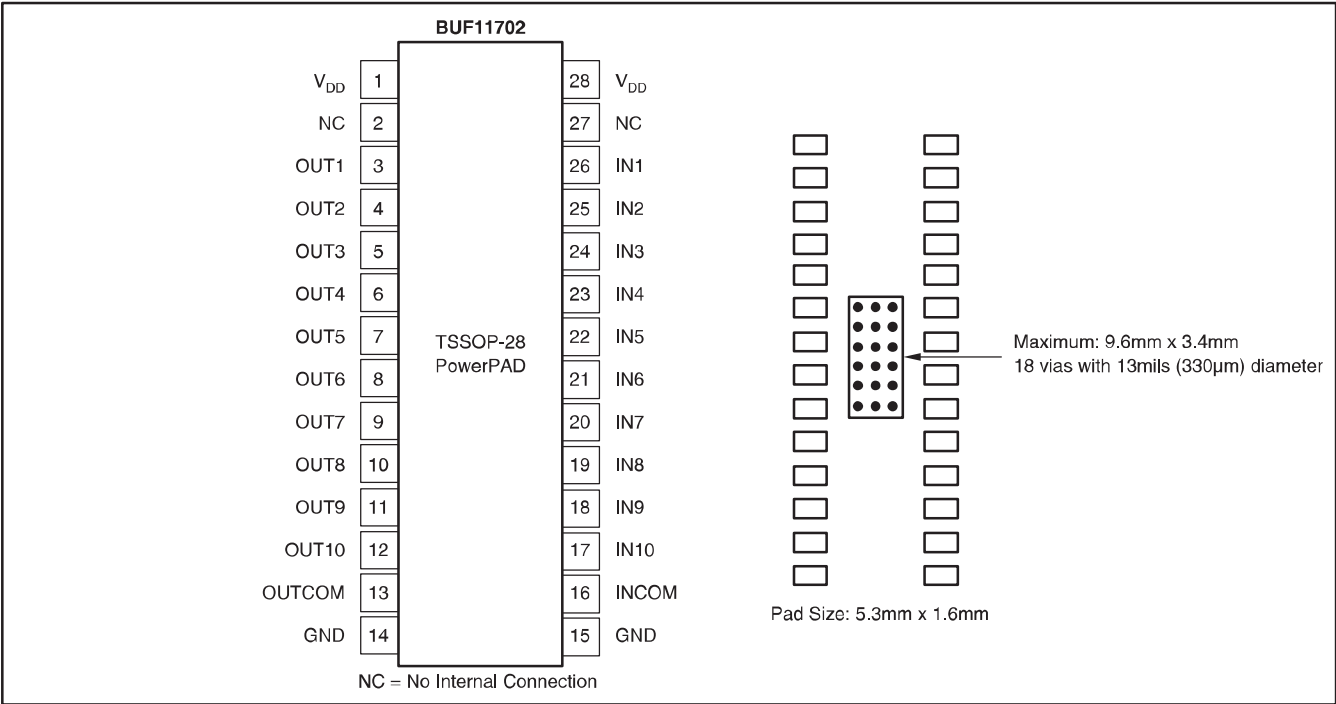

**BUF07702 Pin Configuration**

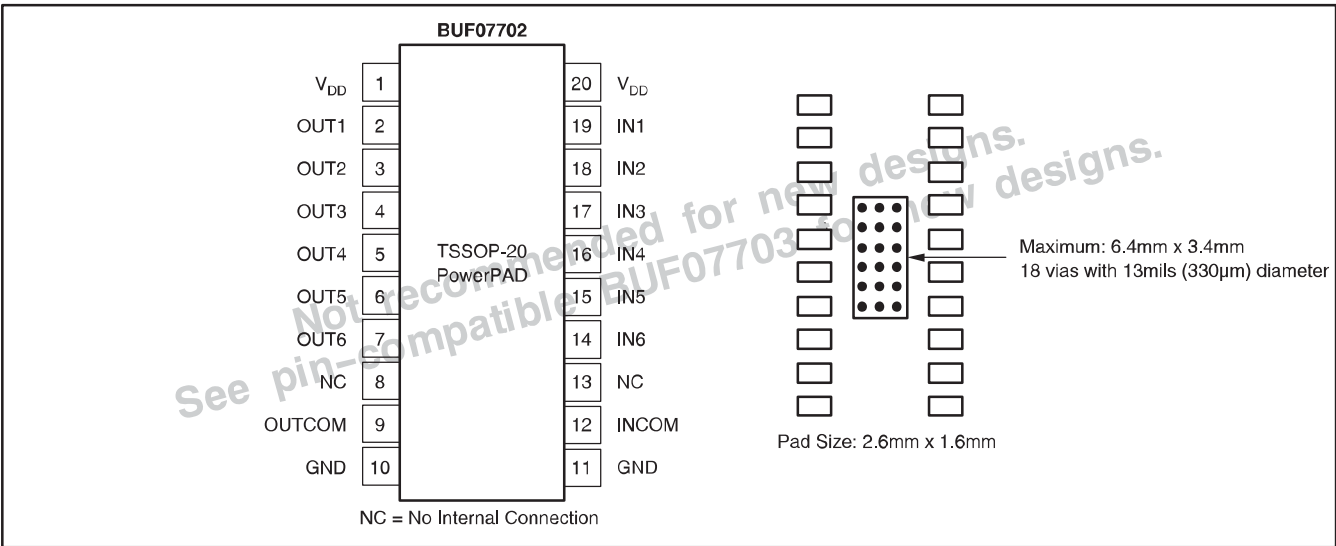

## PARAMETER MEASUREMENT INFORMATION


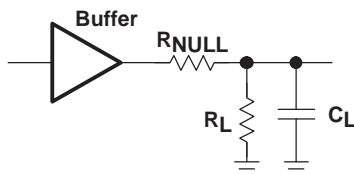


Figure 1. Bandwidth and Phase Shift Test Circuit

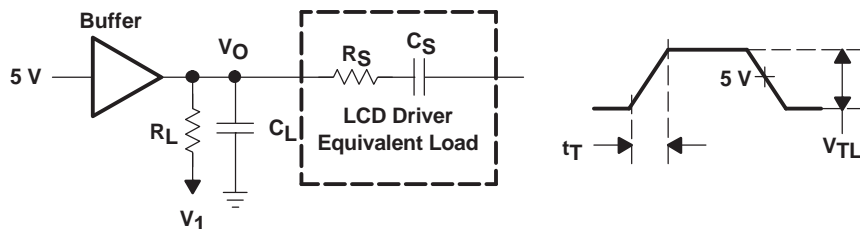

Test		$V_1$	$V_{TL}$	$t_T$	$C_S$	$R_S$	$C_L$	$R_L$
Source	Ch1–Ch10	0 V	2 V	0.1 $\mu$ s	100 pF	100 $\Omega$	100 pF	1 k $\Omega$
Sink	Ch1–Ch10	10 V	2 V	0.1 $\mu$ s	100 pF	100 $\Omega$	100 pF	1 k $\Omega$

Figure 2. Transient Load Response Test Circuit

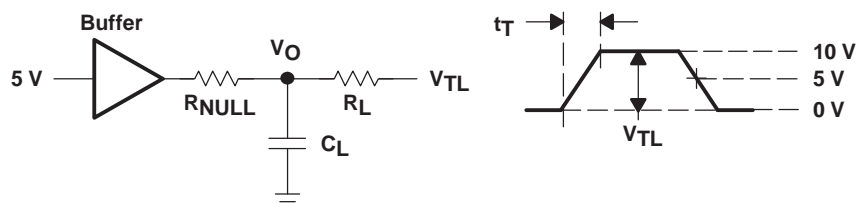


Figure 3. Transient Load Regulation Test Circuit

## TYPICAL CHARACTERISTICS

### DC CURVES

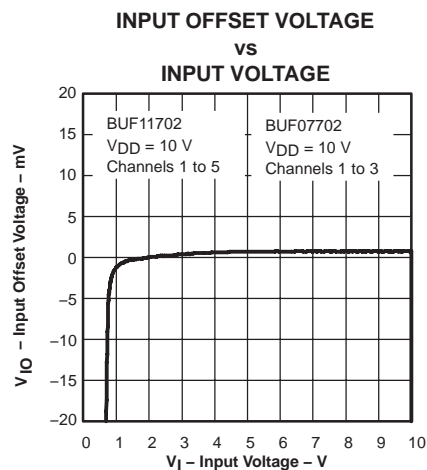


Figure 4

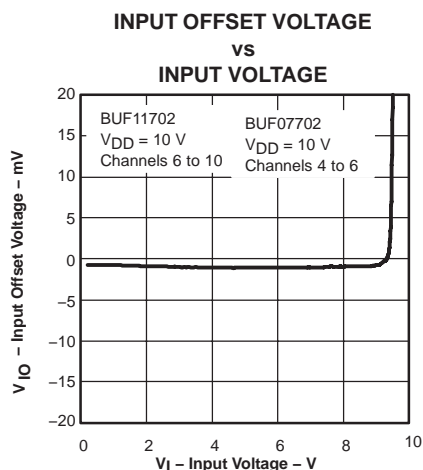


Figure 5

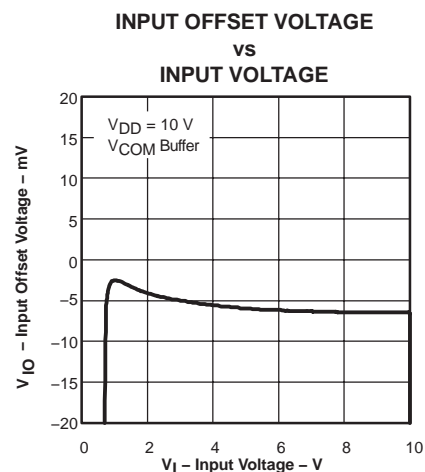


Figure 6

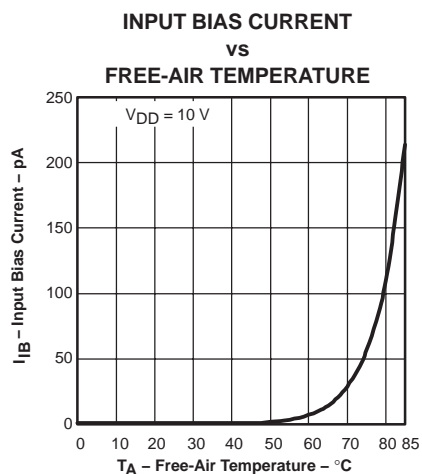


Figure 7

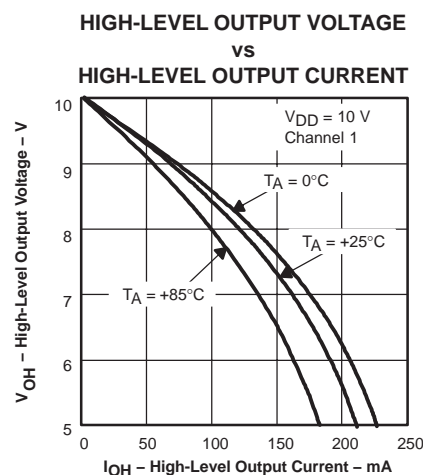


Figure 8

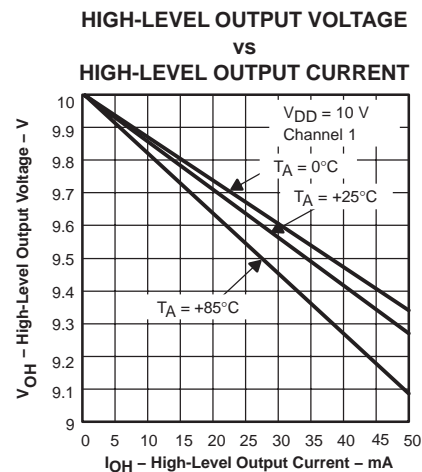


Figure 9

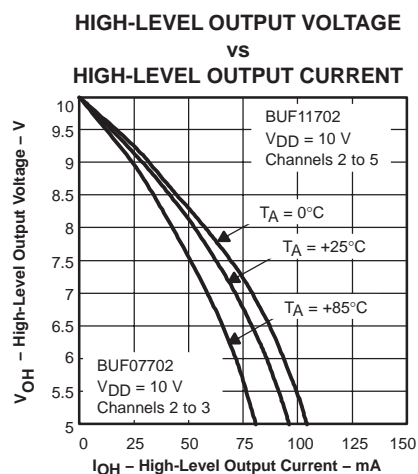


Figure 10

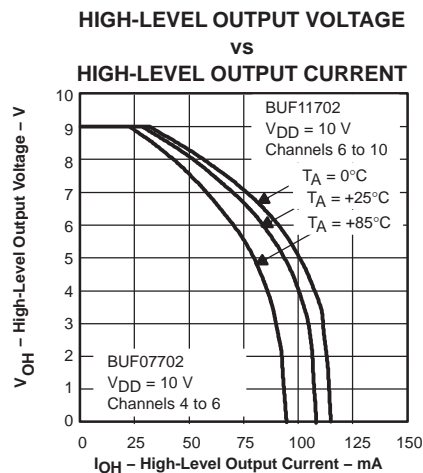


Figure 11

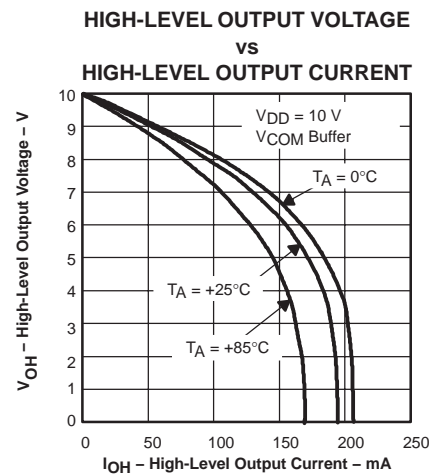


Figure 12



## TYPICAL CHARACTERISTICS

### DC CURVES (CONTINUED)

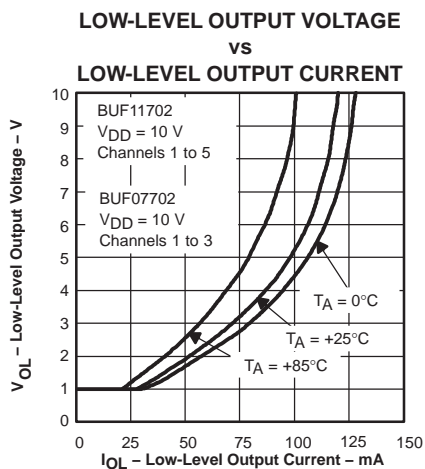


Figure 13

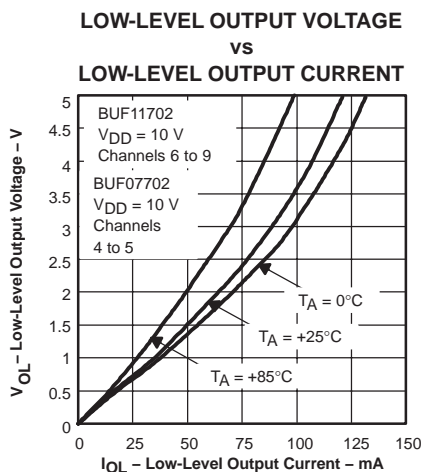


Figure 14

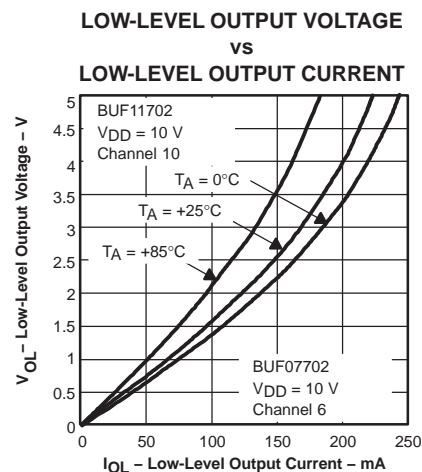


Figure 15

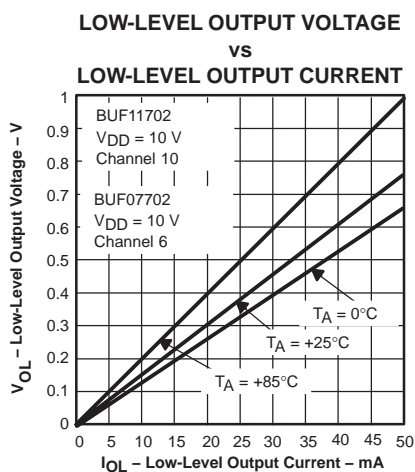


Figure 16

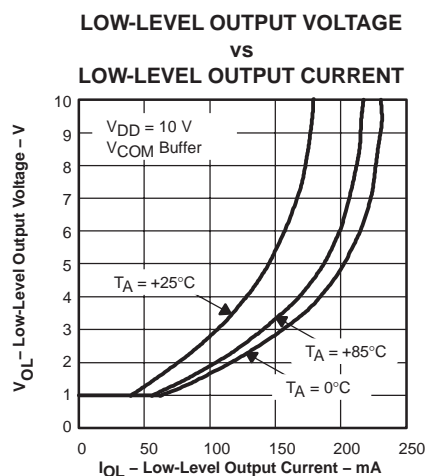


Figure 17

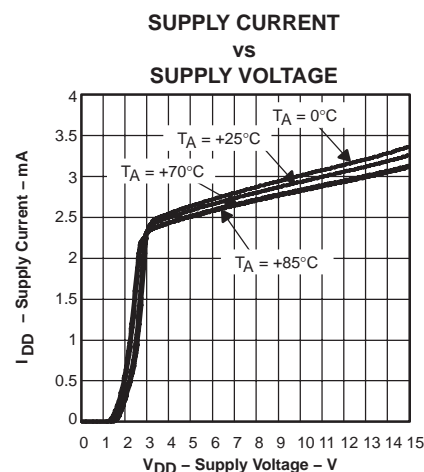


Figure 18

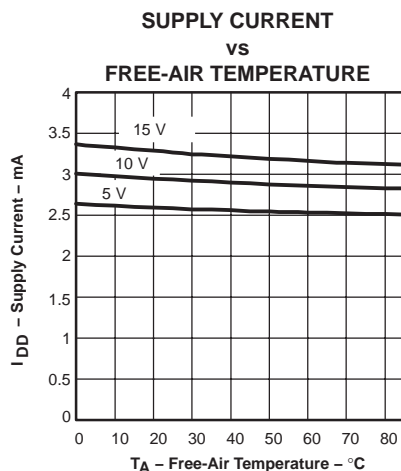


Figure 19

## TYPICAL CHARACTERISTICS

### AC CURVES

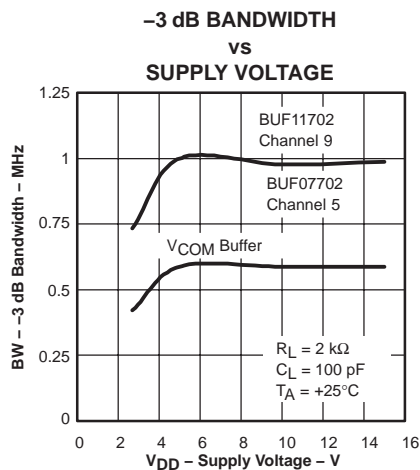


Figure 20

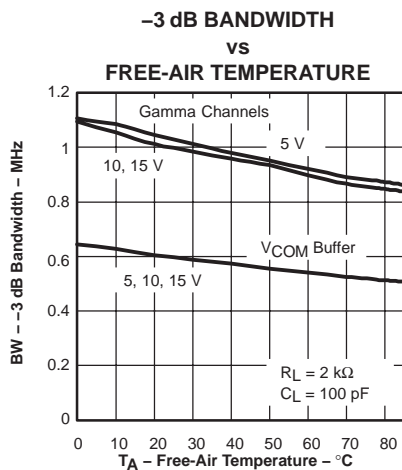


Figure 21

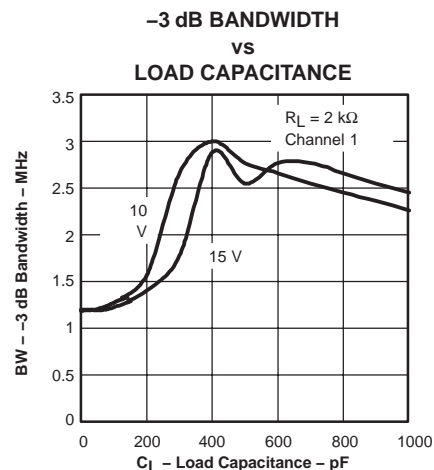


Figure 22

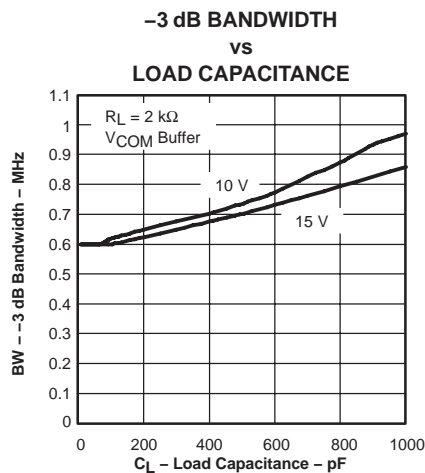


Figure 23

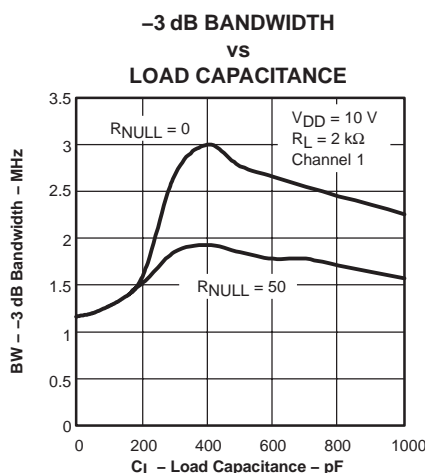


Figure 24

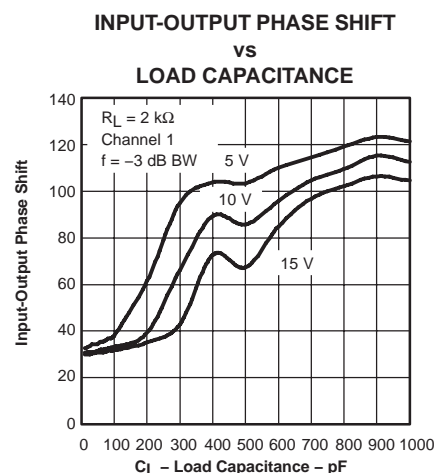


Figure 25

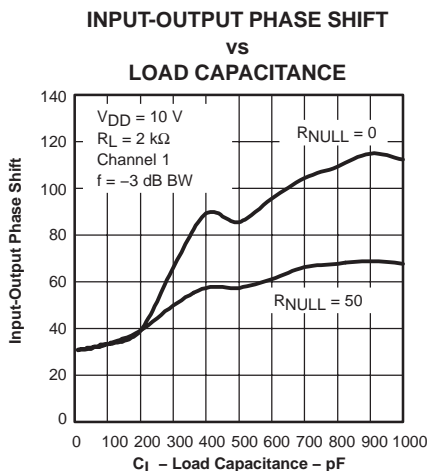


Figure 26

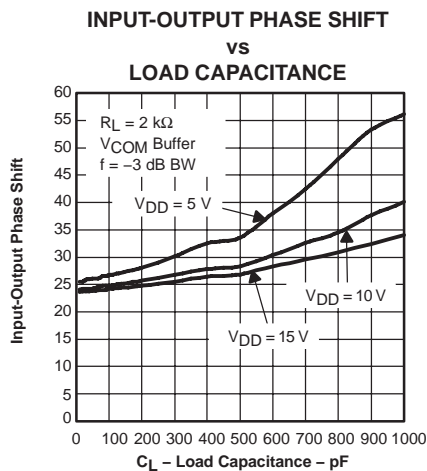


Figure 27

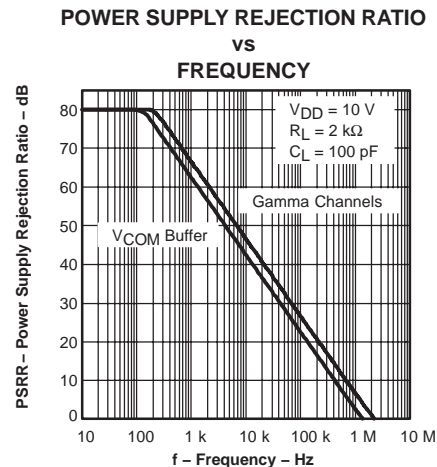


Figure 28

## TYPICAL CHARACTERISTICS

### AC CURVES (CONTINUED)

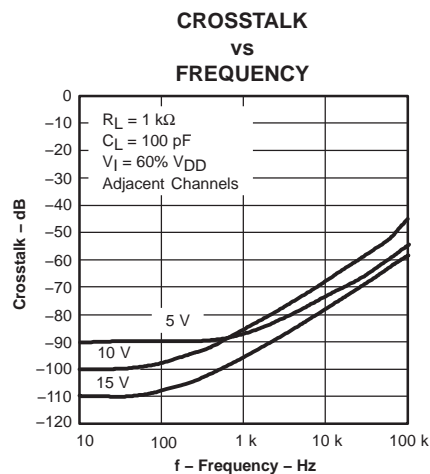


Figure 29

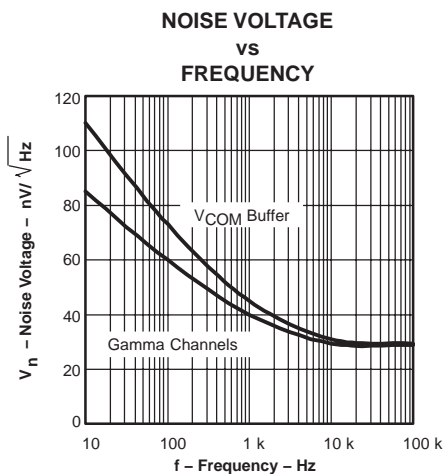


Figure 30

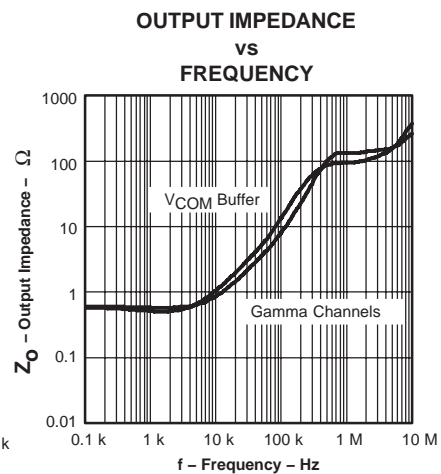


Figure 31

## TYPICAL CHARACTERISTICS

### TRANSIENT CURVES

SUPPLY VOLTAGE, OUTPUT VOLTAGE  
AND SUPPLY CURRENT

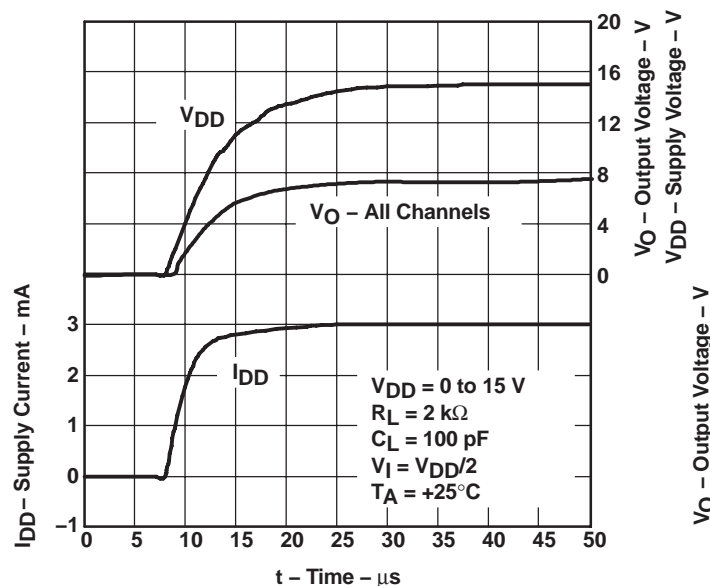


Figure 32

LARGE SIGNAL VOLTAGE FOLLOWER

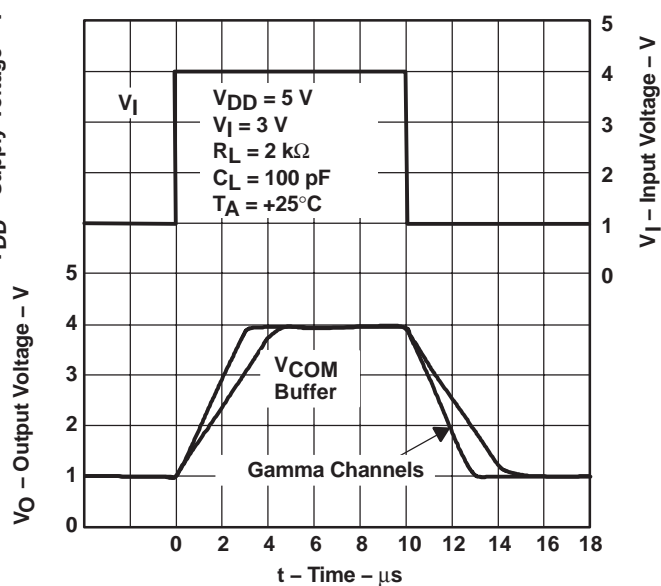


Figure 33

LARGE SIGNAL VOLTAGE FOLLOWER

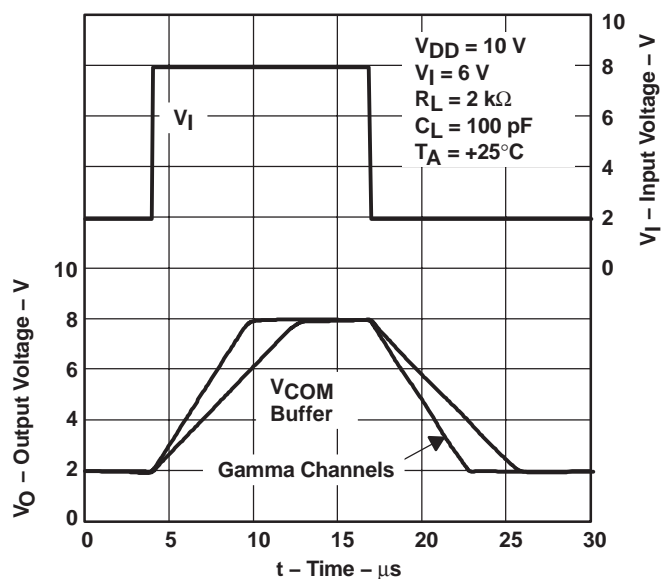


Figure 34

LARGE SIGNAL VOLTAGE FOLLOWER

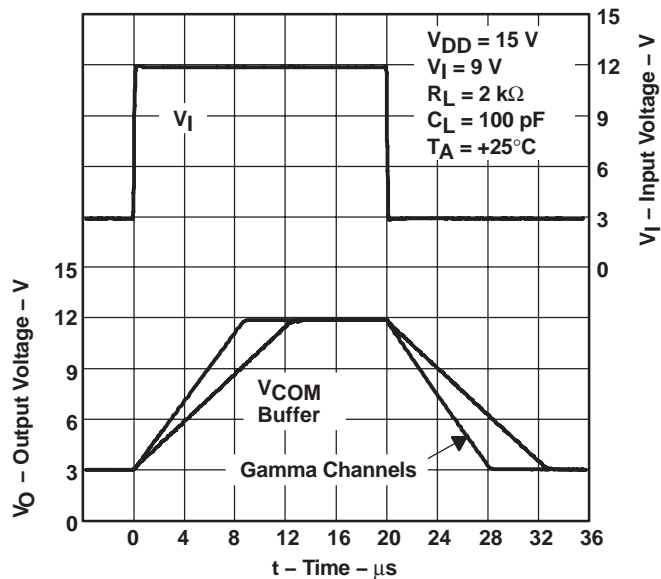


Figure 35

## TYPICAL CHARACTERISTICS

### TRANSIENT CURVES (CONTINUED)

#### SMALL SIGNAL VOLTAGE FOLLOWER

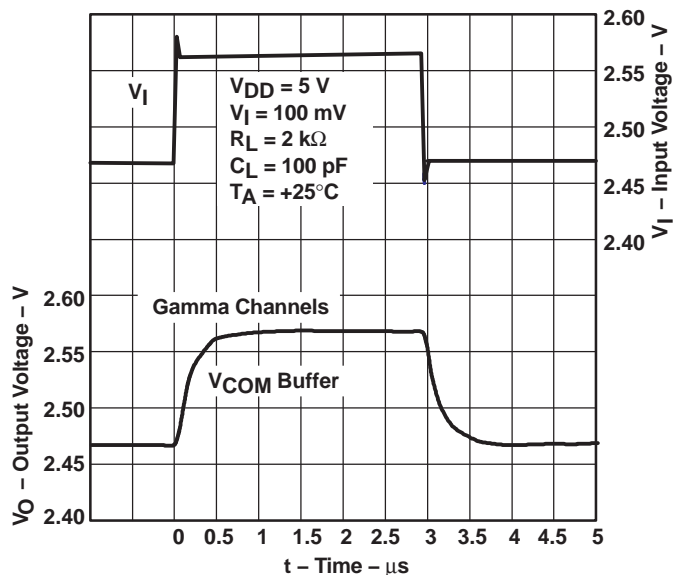


Figure 36

#### SMALL SIGNAL PULSE RESPONSE

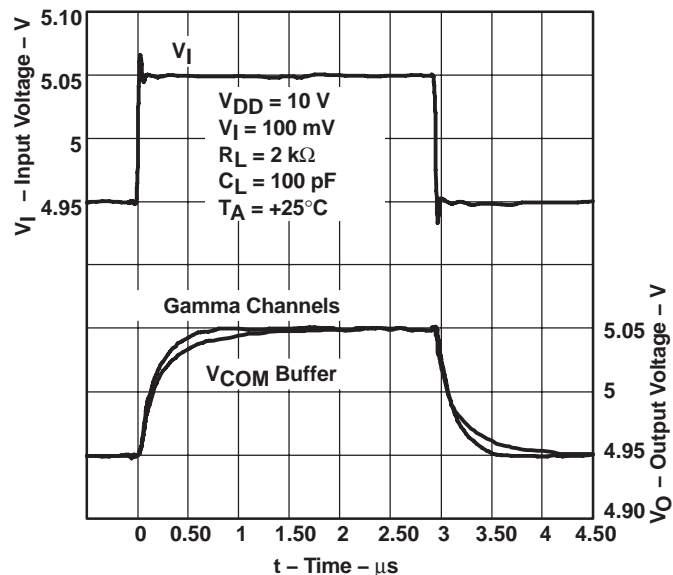


Figure 37

#### SMALL SIGNAL VOLTAGE FOLLOWER

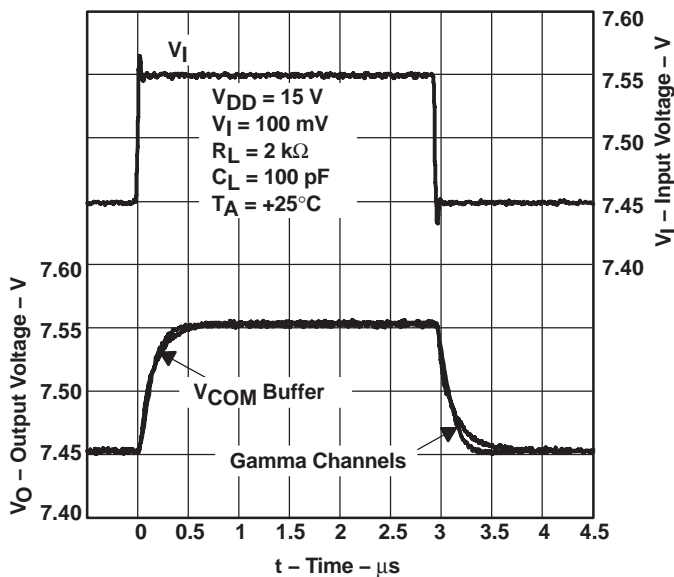


Figure 38

#### TRANSIENT LOAD RESPONSE – SOURCING

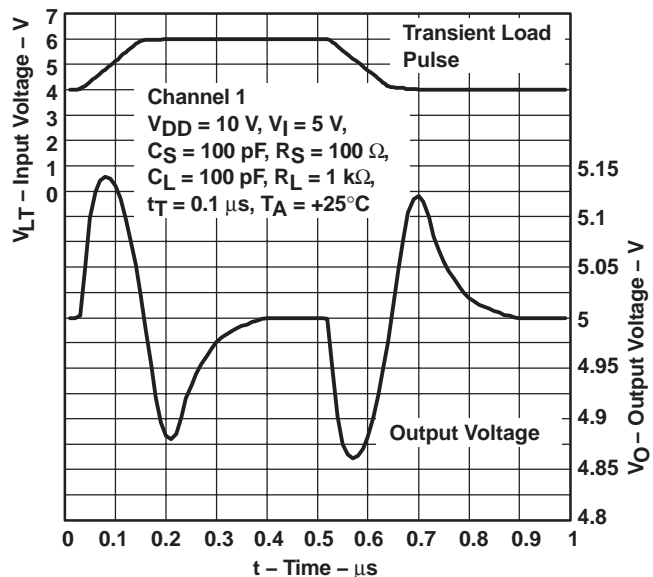


Figure 39

## TYPICAL CHARACTERISTICS

### TRANSIENT CURVES (CONTINUED)

TRANSIENT LOAD RESPONSE – SINKING

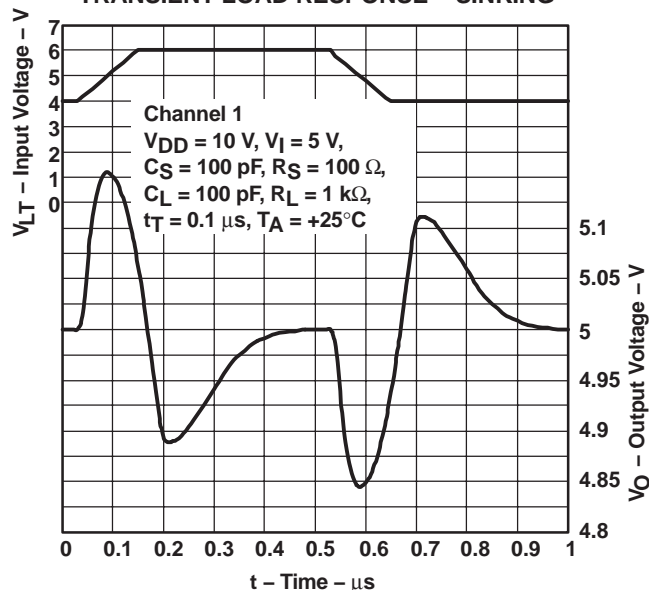


Figure 40

TRANSIENT LOAD REGULATION – SINKING

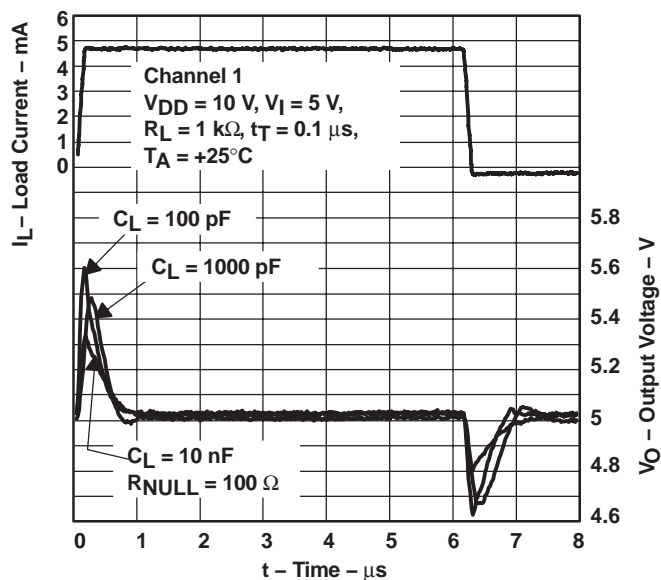


Figure 41

TRANSIENT LOAD REGULATION – SOURCING

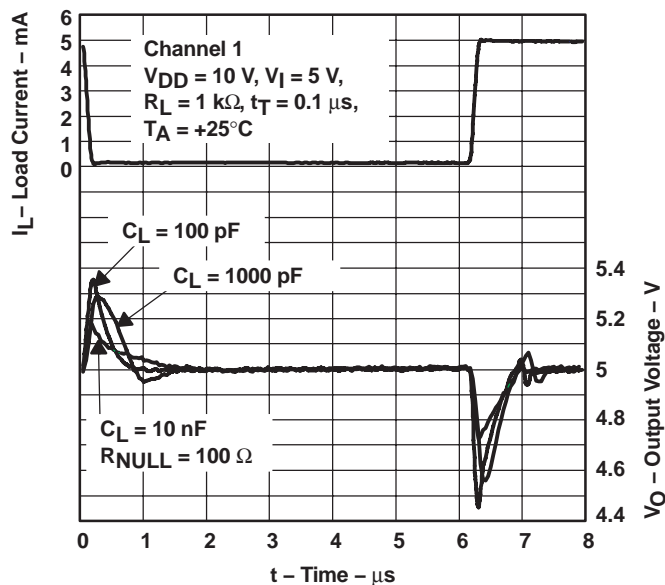


Figure 42

TRANSIENT LOAD REGULATION –  $V_{COM}$  BUFFER

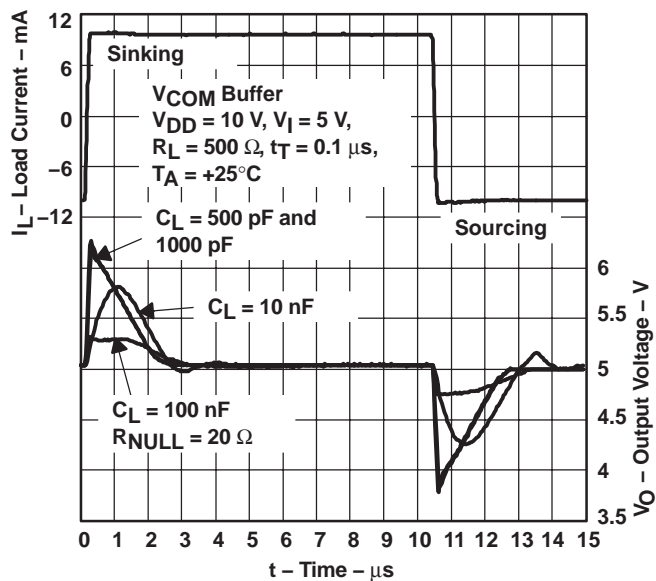


Figure 43

## APPLICATION INFORMATION

The requirements on the number of gamma correction channels vary greatly from panel to panel. Therefore, the BUFxx702 series of gamma correction buffers offers different channel combinations. The BUF11702 offers 10 gamma channels plus one  $V_{COM}$  channel, whereas the BUF07702 provides six gamma channels plus one  $V_{COM}$ . The  $V_{COM}$  channel on both models can be used to drive the  $V_{COM}$  node on the LCD panel.

Gamma correction voltages are often generated using a simple resistor ladder, as shown in Figure 44. The BUFxx702 buffers the various nodes on the gamma correction resistor ladder. The low output impedance of the BUFxx702 forces the external gamma correction voltage on the respective reference node of the LCD source driver. Figure 44 shows an example of the BUFxx702 in a typical block diagram driving an LCD source driver with 10- or 6-channel gamma correction reference inputs.

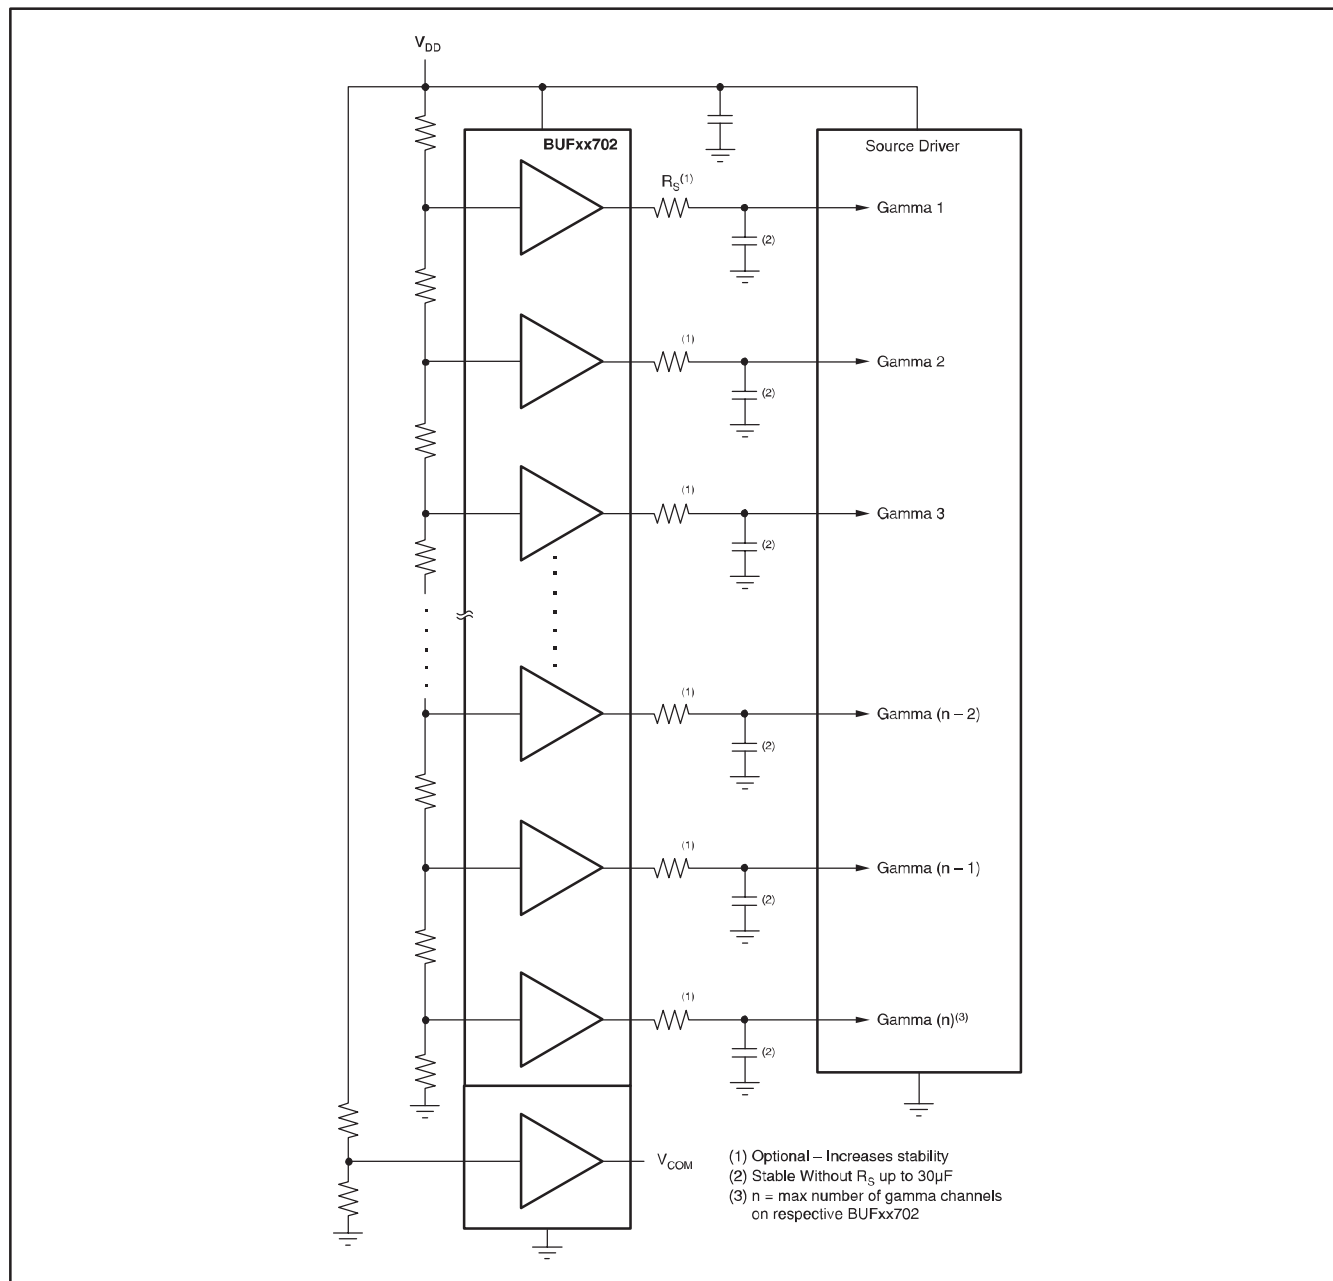


Figure 44. LCD Source Driver Typical Block Diagram

## INPUT VOLTAGE RANGE GAMMA BUFFERS

Figure 45 shows a typical gamma correction curve with 10 gamma correction reference points (GMA1 through GMA10). As can be seen from this curve, the voltage requirements for each buffer vary greatly. The swing capability of the input stages of the various buffers is carefully matched to the application. Using the example of the BUF11702 with 10 gamma correction channels, buffers 1 to 5 have input stages that include  $V_{DD}$ , but will only swing within 1V to GND. Buffers 1 through 5 have only a single NMOS input stage. Buffers 6 through 10 have only a single PMOS input stage. The input range of the PMOS input stage includes GND.

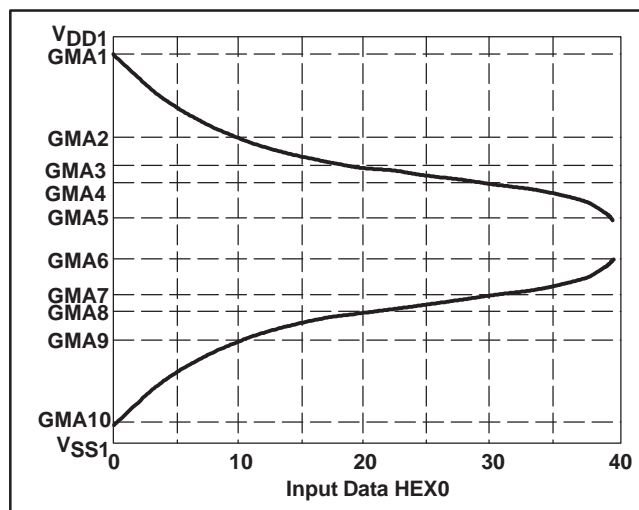


Figure 45. Gamma Correction Curve

## OUTPUT VOLTAGE SWING GAMMA BUFFERS

The output stages have been designed to match the characteristic of the input stage. Once again, using the example of the BUF11702, this means that the output stage of buffer 1 swings very close to  $V_{DD}$ , typically  $V_{CC} - 100\text{mV}$  at 5mA; its ability to swing to GND is limited. Buffers 2 through 5 have smaller output stages with slightly larger output resistance, as they will not have to swing as close to the positive rail as buffer 1. Buffers 6 through 10 swing closer to GND than  $V_{DD}$ . Buffer 10 is designed to swing very close to GND; typically, GND + 100mV at a 5mA load current. See the Typical Characteristics for more details. This approach significantly reduces the silicon area and cost of the whole solution. However, due to this architecture, the correct buffer needs to be connected to the correct gamma correction voltage. Connect buffer 1 to the gamma voltage closest to  $V_{DD}$ , and buffers 2 through 5 to the following voltages. Buffer 10 should be connected to the gamma correction voltage closest to GND (or the negative rail), and buffers 9 through 6 to the following higher voltages.

## COMMON BUFFER ( $V_{COM}$ )

The common buffer output of the BUF11702 has a greater output drive capability than buffers 1 through 10, to meet the heavier current demands of driving the common node of the LCD panel. It was also designed to drive heavier capacitive loads and still remain stable, as shown in Figure 46.

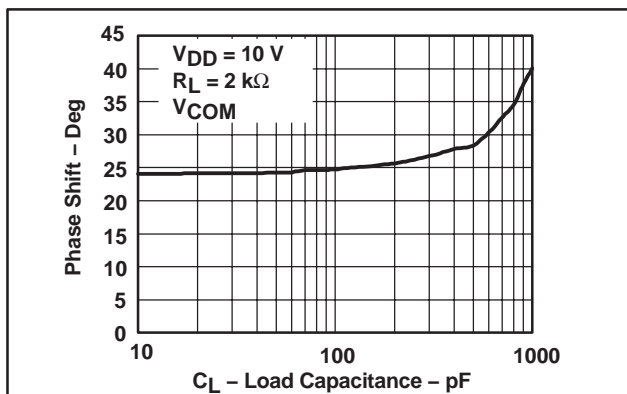


Figure 46. Phase Shift vs Load Capacitance

## CAPACITIVE LOAD DRIVE

The BUF11702 has been designed to be able to sink/source dc currents in excess of 10mA. Its output stage has been designed to deliver output current transients with little disturbance of the output voltage. However, there are times when very fast current pulses are required. Therefore, in LCD source driver buffer applications, it is quite normal for capacitors to be placed at the outputs of the reference buffers. These capacitors improve the transient load regulation and will typically vary from 100pF and more. The BUF11702 gamma buffers were designed to drive capacitances in excess of 100pF and retain effective phase margins above 50°, as shown in Figure 47.

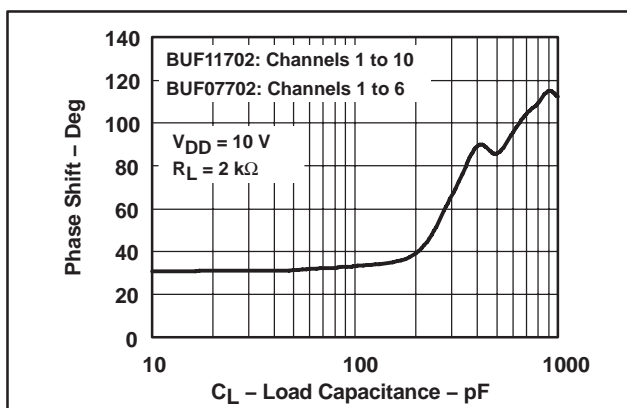


Figure 47. Phase Shift Between Output and Input vs Load Capacitance for the Gamma Buffers



## APPLICATIONS WITH >10 GAMMA CHANNELS

When a greater number of gamma correction channels are required, two or more BUFxx702 devices can be used in parallel, as shown in Figure 48. This capability provides a cost-effective way of creating more reference voltages over the use of quad-channel op amps or buffers. The suggested configuration in Figure 48 simplifies layout. The various different channel versions provide a high degree of flexibility and also minimize total cost and space.

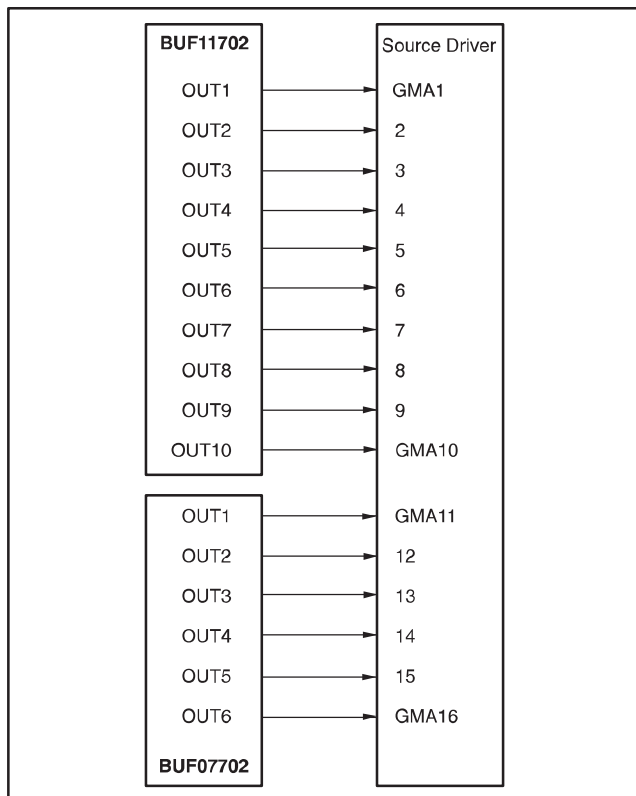


Figure 48. Creating > 10 Gamma Voltage Channels

## MULTIPLE $V_{COM}$ CHANNELS

In some LCD panels, more than one  $V_{COM}$  driver is required for best panel performance. Figure 49 uses three BUF07702s to create a total of 18 gamma-correction and three  $V_{COM}$  channels. This solution saves considerable space and cost over the more conventional approach of using five or six quad-channel buffers or op amps.

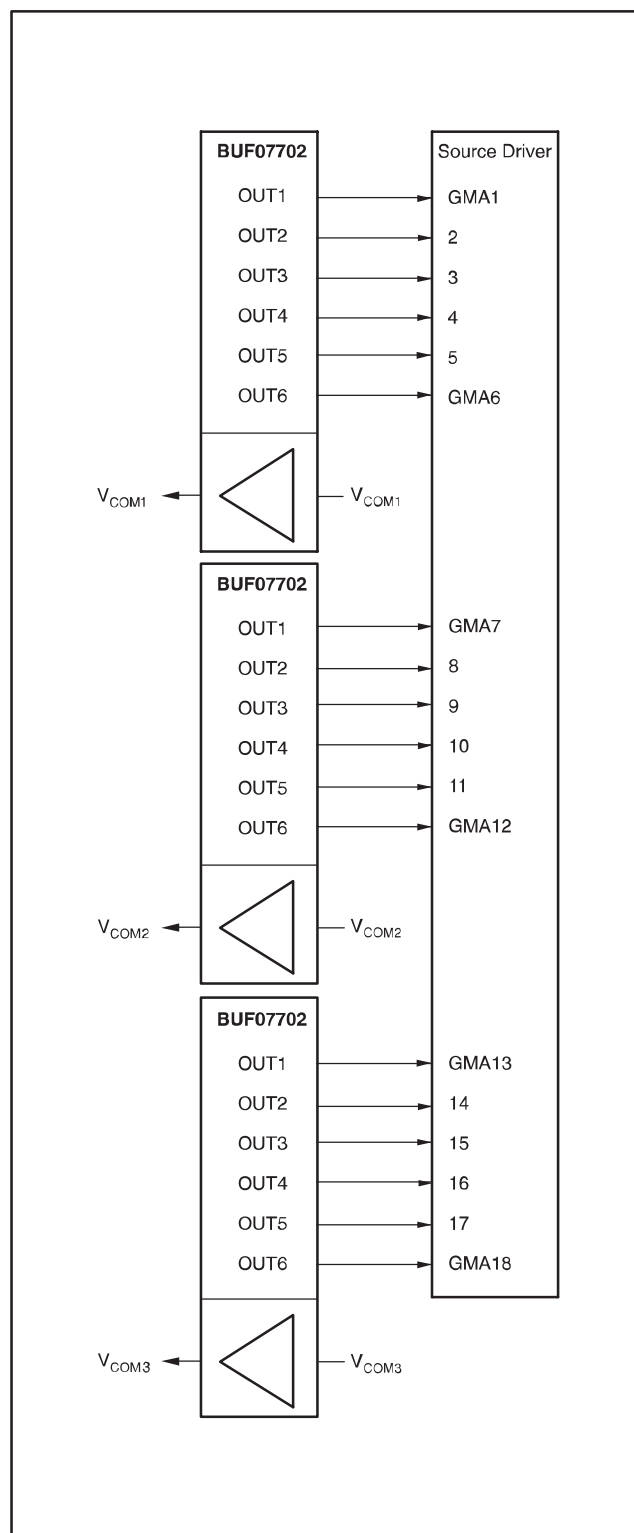


Figure 49. 18-Channel Application with Three Integrated  $V_{COM}$  Channels

## COMPLETE LCD SOLUTION FROM TI

In addition to the BUFxx702 line of gamma correction buffers, TI offers a complete set of ICs for the LCD panel market, including source and gate drivers, various power-supply solutions, and audio power solutions. Figure 50 shows the total IC solution from TI.

## AUDIO POWER AMPLIFIER FOR TV SPEAKERS

The TPA3002D2 is a 7W (per channel) stereo audio amplifier specifically targeted towards LCD monitors and TVs. It offers highly efficient, filter-free Class-D operation for driving bridge-tied stereo speakers. The TPA3002D2 is designed to drive stereo speakers as low as  $8\Omega$  without an output filter. The high efficiency of the TPA3002D2 eliminates the need for external heatsinks when playing music. Stereo speaker volume is controlled with a dc voltage applied to the volume control terminal offering a range of gain from  $-40\text{dB}$  to  $+36\text{dB}$ . Line outputs, for driving external headphone amplifier inputs, are also dc voltage-controlled with a range of gain from  $-56\text{dB}$  to  $+20\text{dB}$ . An integrated  $+5\text{V}$  regulated supply is provided for powering an external headphone amplifier. The TPA3002D2 was released to market in 2002. Texas Instruments offers a full line of linear and switch-mode audio power amplifiers. For more information, visit [www.ti.com](http://www.ti.com). For excellent audio performance, TI recommends the OPA364 or OPA353 as headphone drivers.

## GENERAL POWERPAD DESIGN CONSIDERATIONS

The BUF11702 is available in the thermally enhanced PowerPAD family of packages. These packages are constructed using a downset leadframe upon which the die is mounted; see Figures 51(a) and (b). This arrangement results in the lead frame being exposed as a thermal pad on the underside of the package; see Figure 51(c). Due to this thermal pad having direct thermal contact with the die, excellent thermal performance is achieved by providing a good thermal path away from the thermal pad.

The PowerPAD package allows for both assembly and thermal management in one manufacturing operation. During the surface-mount solder operation (when the leads are being soldered), the thermal pad can also be soldered to a copper area underneath the package. Through the use of thermal paths within this copper area, heat can be conducted away from the package into either a ground plane or other heat-dissipating device. Soldering the PowerPAD to the PCB is always required, even with applications that have low power dissipation. This provides the necessary thermal and mechanical connection between the lead frame die pad and the PCB.

The PowerPAD must be connected to the device's most negative supply voltage.

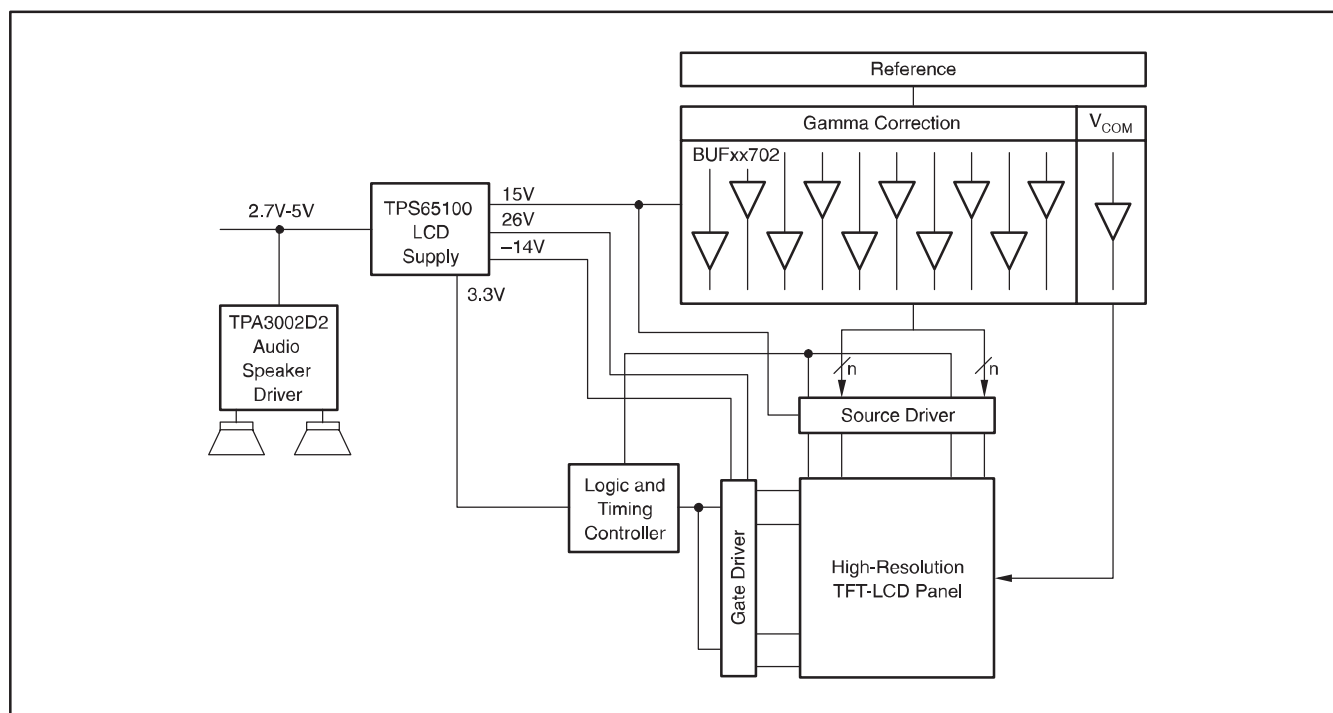


Figure 50. TI LCD Solution

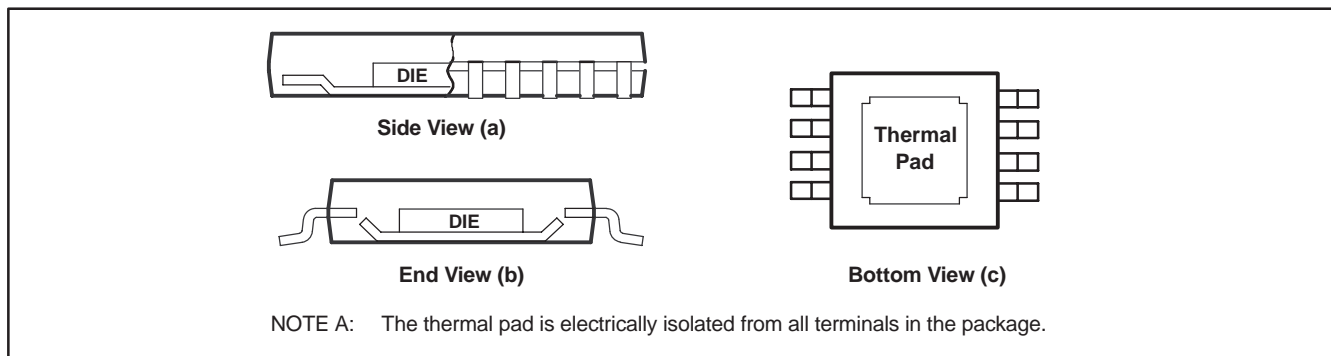


Figure 51. Views of Thermally Enhanced DGN Package

### PowerPAD ASSEMBLY PROCESS

1. Prepare the PCB with a top-side etch pattern (see Pin Configurations). There should be etching for the leads as well as etch for the thermal pad.
2. Place 18 holes in the area of the thermal pad. These holes should be 13mils in diameter. Keep them small, so that solder wicking through the holes is not a problem during reflow.
3. Additional vias may be placed anywhere along the thermal plane outside of the thermal pad area. This helps dissipate the heat generated by the BUFxx702 IC. These additional vias may be larger than the 13mil diameter vias directly under the thermal pad. They can be larger because they are not in the thermal pad area to be soldered, thus, wicking is not a problem.
4. Connect all holes to the internal ground plane.
5. When connecting these holes to the ground plane, do not use the typical web or spoke via connection methodology. Web connections have a high thermal resistance connection that is useful for slowing the heat transfer during soldering operations. This makes the soldering of vias that have plane connections easier. In this application, however, low thermal resistance is desired for the most efficient heat transfer. Therefore, the holes under the BUFxx702 PowerPAD package should make their connection to the internal ground plane with a complete connection around the entire circumference of the plated-through hole.
6. The top-side solder mask should leave the terminals of the package and the thermal pad area with its five holes (dual) or nine holes (quad) exposed. The bottom-side solder mask should cover the five or nine holes of the thermal pad area. This prevents solder from being pulled away from the thermal pad area during the reflow process.
7. Apply solder paste to the exposed thermal pad area and all of the IC terminals.

8. With these preparatory steps in place, the BUFxx702 IC is simply placed in position and run through the solder reflow operation as any standard surface-mount component. This preparation results in a properly installed part.

For a given  $\theta_{JA}$ , the maximum power dissipation is shown in Figure 52, and is calculated by the following formula:

$$P_D = \left( \frac{T_{MAX} - T_A}{\theta_{JA}} \right)$$

Where:

$P_D$  = maximum power dissipation (W)

$T_{MAX}$  = absolute maximum junction temperature (150°C)

$T_A$  = free-ambient air temperature (°C)

$\theta_{JA} = \theta_{JC} + \theta_{CA}$

$\theta_{JC}$  = thermal coefficient from junction to case (°C/W)

$\theta_{CA}$  = thermal coefficient from case-to-ambient air (°C/W)

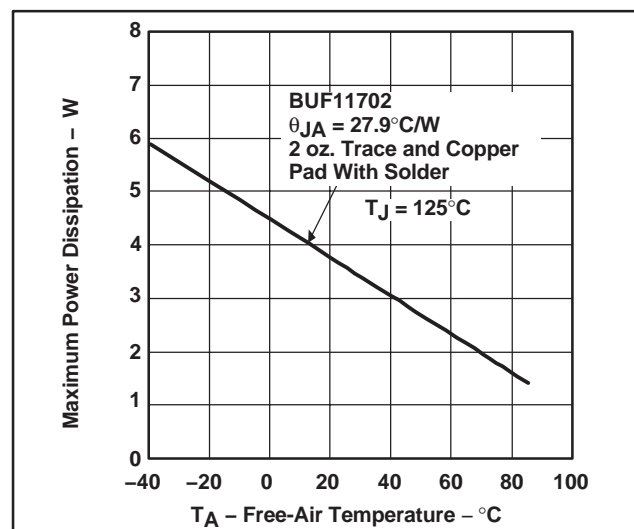


Figure 52. Maximum Power Dissipation vs Free-Air Temperature

This lower thermal resistance enables the BUFxx702 to deliver maximum output currents even at high ambient temperatures.

## APPLICATION INFORMATION

### BUF11702 Demonstration Board

#### (Contact Factory)

The BUF11702 has an demonstration board that can be mounted along with reference resistors and load capacitors. This enables the BUF11702 to be used in its own daughterboard in existing designs for easy evaluation. The schematic of the BUF11702 demo board is shown in Figure 53. Note that the demo board has been configured for single-supply use. As such, all

decoupling capacitors are connected to the ground plane of the demo board, as are the ground terminals of the BUF11702.

In populated versions of the demo board, capacitors C<sub>1</sub> to C<sub>4</sub> have been included. Capacitors C<sub>1</sub> and C<sub>2</sub> are bulk decoupling capacitors of 6.8μF, whereas capacitors C<sub>3</sub> and C<sub>4</sub> are 100nF ceramic high-frequency decoupling capacitors. Resistors R<sub>1</sub> to R<sub>32</sub> and capacitors C<sub>5</sub> to C<sub>16</sub> have not been included and are application-specific.

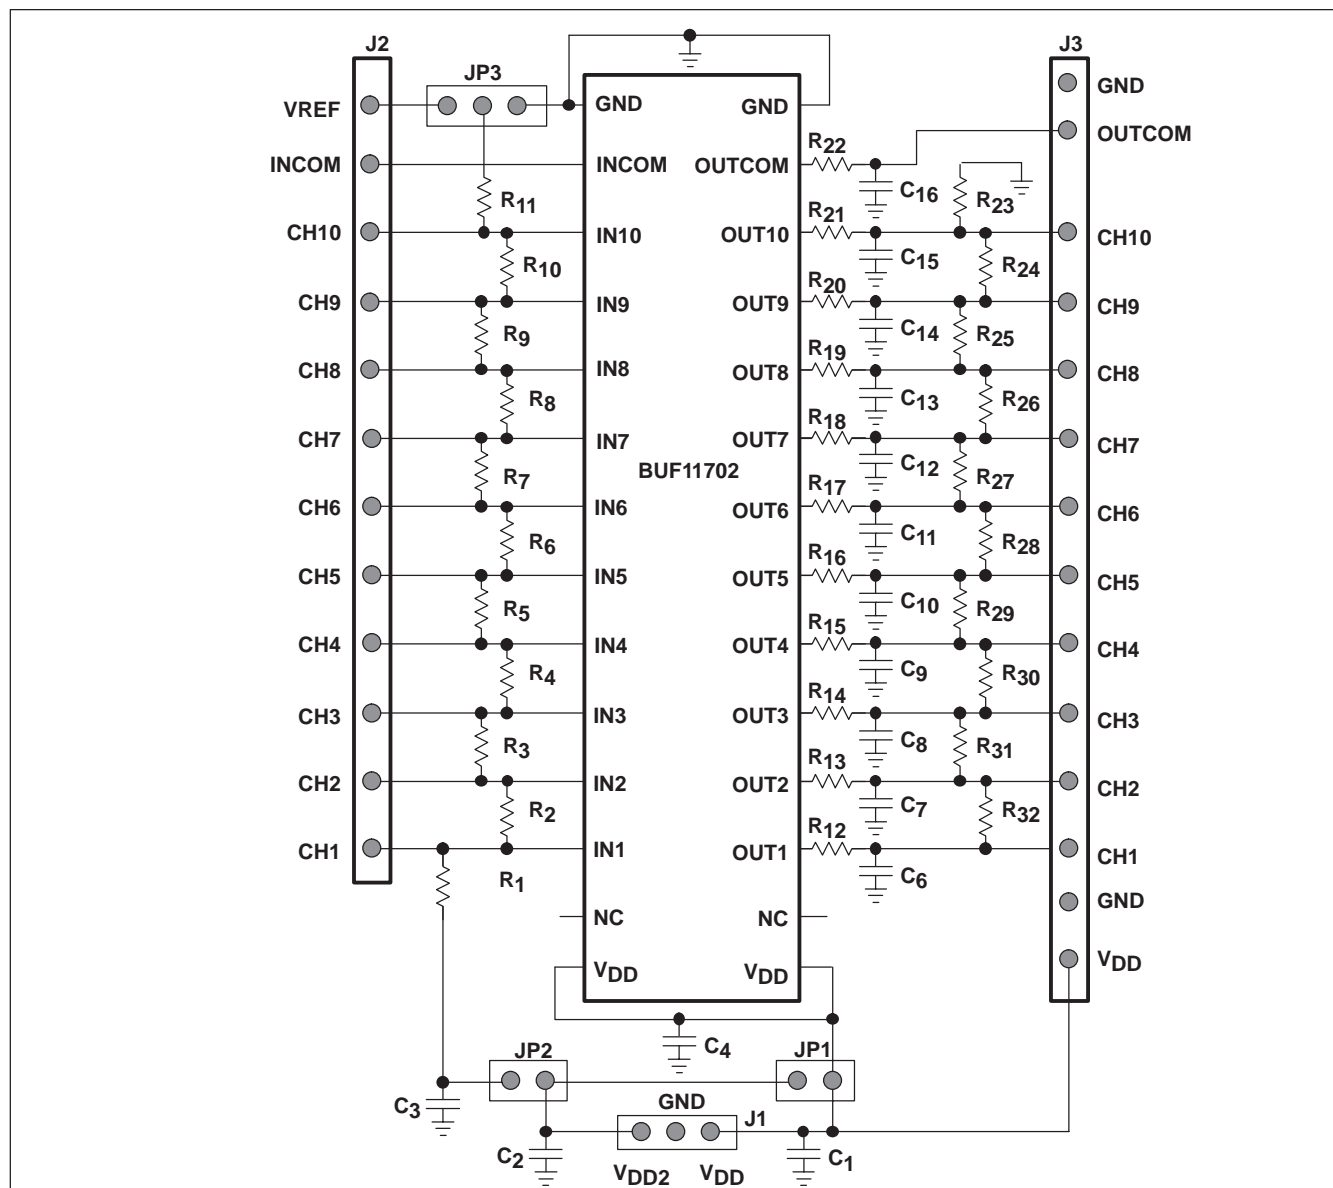


Figure 53. BUF11702 Demonstration Board Schematic

## REFERENCE VOLTAGES

The reference voltages can be supplied externally via the connector J2 (not included) or generated onboard via resistors  $R_1$  to  $R_{11}$ . An external low side reference has been provided on the board so that the negative references can be referred to a voltage other than ground.

The reference ladder can be referred to either  $V_{DD}$  (master supply voltage) or a secondary voltage,  $V_{DD2}$ . This allows a low noise or absolute reference voltage to be used for the LCD source driver's DACs other than the system voltage. If the secondary voltage is used, then jumper JP1 should be left open and jumper JP2 shorted. If a ratiometric reference (proportional to the master supply voltage) is to be used, then jumpers JP1 and JP2 should both be shorted, feeding  $V_{DD}$  through to the reference ladder.

## OUTPUT

The outputs of the BUF11702 are fed to connector J3 (not mounted). This enables the output voltages to be monitored directly on the demonstration board or fed off-board for evaluation in a real system.

Onboard load resistors,  $R_{23}$  to  $R_{32}$ , connected to ground can also be mounted. These can be used to simulate resistive loading of the LCD source driver.

Transient improving capacitors are frequently used in LCD panel applications. Therefore, pads to mount these transient improving capacitors,  $C_6$  to  $C_{16}$ , have been included. Due to the possible magnitude of these capacitors, pads have been placed between the output of the BUF11702 and these capacitors to mount nulling resistors,  $R_{12}$  to  $R_{22}$ . If the nulling resistors are not required, shorts could be placed instead of resistors.

The pads for  $R_1$  to  $R_{32}$  and capacitors  $C_3$  to  $C_{16}$  have been laid out to support 0805 or 1206 size components.

## PowerPAD

The BUF11702 demonstration board has been laid out to support the PowerPAD feature of the BUF11702. An area is provided on the demo board, under the BUF11702, for the exposed leadframe connection. Eighteen vias are connected to the ground plane of the demo board to significantly reduce the thermal case to ambient resistance,  $\theta_{CA}$ . See the Applications section on general PowerPAD design considerations.

## PACKAGING INFORMATION

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
BUF07702PWP	ACTIVE	HTSSOP	PWP	20	70	Pb-Free (RoHS)	CU NIPDAU	Level-2-250C-1 YEAR
BUF07702PWPR	ACTIVE	HTSSOP	PWP	20	2000	Pb-Free (RoHS)	CU NIPDAU	Level-2-250C-1 YEAR
BUF11702PWP	ACTIVE	HTSSOP	PWP	28	50	Pb-Free (RoHS)	CU NIPDAU	Level-2-250C-1 YEAR
BUF11702PWPR	ACTIVE	HTSSOP	PWP	28	2000	Pb-Free (RoHS)	CU NIPDAU	Level-2-250C-1 YEAR
BUF11702PWPRG4	ACTIVE	HTSSOP	PWP	28	2000	Green (RoHS & no Sb/Br)	Call TI	Level-2-260C-1 YEAR

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - May not be currently available - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**None:** Not yet available Lead (Pb-Free).

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean "Pb-Free" and in addition, uses package materials that do not contain halogens, including bromine (Br) or antimony (Sb) above 0.1% of total product weight.

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## PWP (R-PDSO-G\*\*)

## PowerPAD™ PLASTIC SMALL-OUTLINE PACKAGE

20 PIN SHOWN

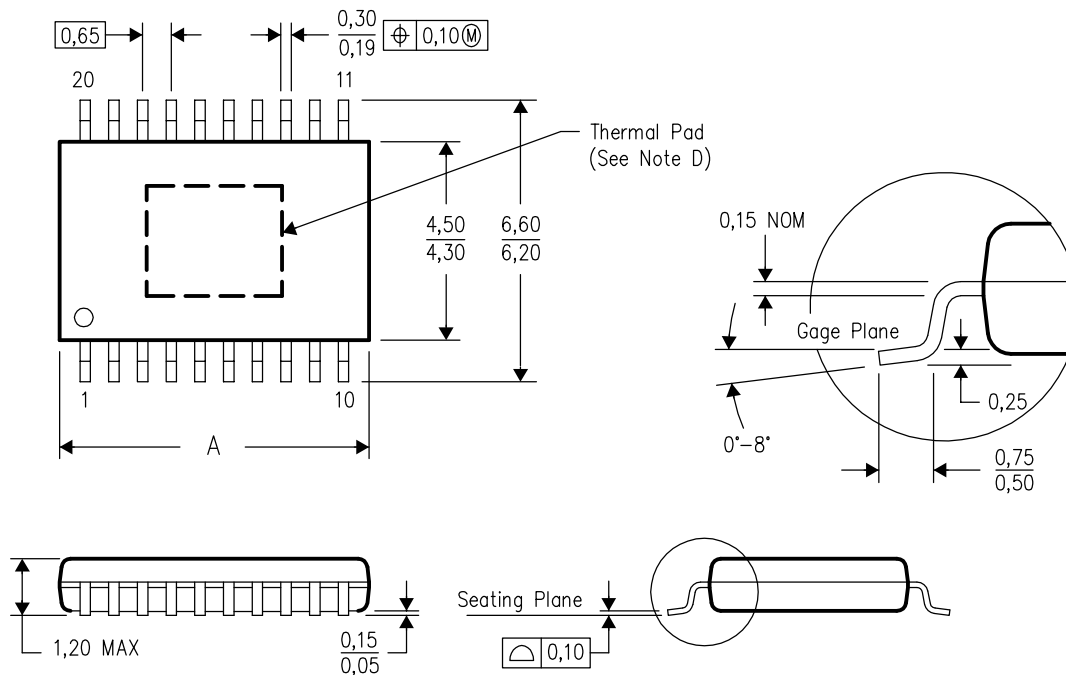

PINS **	14	16	20	24	28
DIM					
A MAX	5,10	5,10	6,60	7,90	9,80
A MIN	4,90	4,90	6,40	7,70	9,60

4073225/G 08/03

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusions.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 for information regarding recommended board layout. This document is available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Falls within JEDEC MO-153

PowerPAD is a trademark of Texas Instruments.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

<b>Products</b>		<b>Applications</b>	
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
		Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
		Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated