

HT1616C Timer with Dialer Interface

Patent Number: 84545 (R.O.C.) Patent Pending: 08/214, 079 (U.S.A.)

Features

- Operating voltage: 1.2V~1.7V
- Low operating current: 4μA typ.
- Dialing number and conversation time display
- Conversation timer (59 mins and 59 secs max.)
- 12 or 16 digits LCD display driver; 3V, 1/2 bias, 1/3 duty
- Real time clock

- Stop watch
- Built-in dialer interface
- 12-hour or 24-hour format
- Two-button sequential operation for real time clock setting
- Uses 32768Hz crystal

Applications

- Timers, clocks and watches
- LCD display drivers


- Telephone display interface
- Instrument display

General Description

The HT1616C is a CMOS chip designed for dialer interfaces driving 12 or 16-digit LCDs. Various functions, such as real time clock, dialing number and conversation time display are provided.


For HT1616C the real time is displayed by default. When answering a telephone call, the timer is activated to tell users how long the conversation has taken. After the telephone is hung up, the total conversation time is shown for about 5 seconds and the real time is displayed again. When making a phone call, the HT1616C receives dialing data from the dialer and displays the phone number from left to right on the LCD. However, if there is no dialing action within 10 seconds, it restarts the timer again. By adding a TIMER key, the IC can provide stopwatch and timer reset/hold functions. Refer to the functional description for details.

Block Diagram

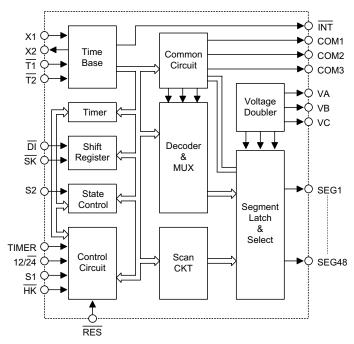



Pad Assignment

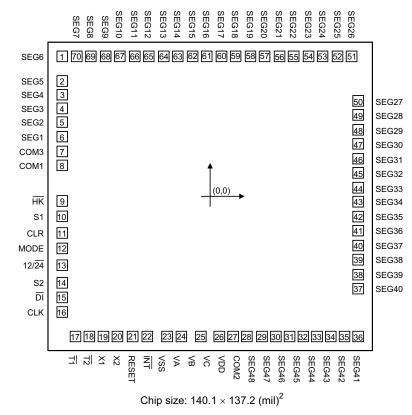

* The IC substrate should be connected to VDD in the PCB layout artwork.

Pad Coordinate	es
----------------	----


Pad Coord	dinates							Unit: mi
Pad No.	Х	Y	Pad No.	Х	Y	Pad No.	Х	Y
1	-64.47	61.01	25	-4.11	-61.01	49	64.47	35.53
2	-64.47	50.26	26	4.03	-61.01	50	64.47	41.65
3	-64.47	44.29	27	10.00	-61.01	51	61.60	61.01
4	-64.47	38.33	28	16.01	-61.01	52	55.48	61.01
5	-64.47	32.36	29	22.59	-61.01	53	48.98	61.01
6	-64.47	26.01	30	28.63	-61.01	54	42.86	61.01
7	-64.47	19.55	31	34.63	-61.01	55	36.36	61.01
8	-64.47	13.50	32	40.60	-61.01	56	30.25	61.01
9	-64.47	-2.03	33	46.57	-61.01	57	23.73	61.01
10	-64.47	-8.72	34	52.54	-61.01	58	17.61	61.01
11	-64.47	-15.99	35	58.50	-61.01	59	11.11	61.01
12	-64.47	-22.68	36	64.47	-61.01	60	4.99	61.01
13	-64.47	-29.99	37	64.47	-40.20	61	-1.51	61.01
14	-64.47	-37.67	38	64.47	-34.08	62	-7.63	61.01
15	-64.47	-43.99	39	64.47	-27.58	63	-14.13	61.01
16	-64.47	-50.37	40	64.47	-21.46	64	-20.25	61.01
17	-58.69	-61.01	41	64.47	-14.95	65	-26.75	61.01
18	-52.65	-61.01	42	64.47	-8.84	66	-32.88	61.01
19	-46.53	-61.01	43	64.47	-2.33	67	-39.38	61.01
20	-40.41	-61.01	44	64.47	3.79	68	-45.50	61.01
21	-33.79	-61.01	45	64.47	10.29	69	-52.00	61.01
22	-27.41	-61.01	46	64.47	16.41	70	-58.12	61.01
23	-18.80	-61.01	47	64.47	22.91			
24	-12.60	-61.01	48	64.47	29.03			



Pad Description

Pad Name	I/O	Internal Connection	Description
SEG1~SEG48	0	CMOS OUT	LCD segment signal output pads
COM1~COM3	0	CMOS OUT	LCD common signal output pads
нк	I	CMOS IN Pull-high	Hook switch detector input
S1	I	CMOS IN Pull-low	Clock setting switch Hour or minute can be selected for S2 adjustment
RES	I	CMOS IN Pull-high	System initialization pin, active low The pull-high resistance is $200k\Omega$ typ.
MODE	I	CMOS IN Pull-low	4 or 5 bits pattern selection pad VDD: 5 bits pattern Floating: 4 bits pattern
12/24	I	CMOS IN Pull-low	12-hour or 24-hour format option pad VDD: 12-hour format Floating: 24-hour format
S2	I	CMOS IN Pull-low	Clock adjusting switch Hour or minute digits can be adjusted depending upon the S1 selection
DI	I	CMOS IN Pull-high	Serial data input pad Data should be valid at the falling edge of \overline{SK} (connected to the dialer)
SK	I	CMOS IN Pull-high	Clock input pad (connected to the dialer), active low Input data is latched at the falling edge of \overline{SK}
T1	I	CMOS IN Pull-high	Test pad (connected to VSS for production test)
T2	I	CMOS IN Pull-high	Test pad (connected to VSS for production test)
X1	I	OSCILLATOR	32768Hz crystal oscillator input
X2	0	USCILLATOR	32768Hz crystal oscillator output
TIMER	I	CMOS IN Pull-low	Timer reset-and-start/hold toggle control input pad
INT	0	NMOS OUT	Interrupt output, 16Hz (default) or 2Hz (by mask option)
VA	0	CMOS OUT	Voltage doubler, connected to the external capacitor
VB	0	CMOS OUT	Voltage doubler, connected to the external capacitor
VC	0	CMOS OUT	Voltage doubler, connected to the external capacitor
VDD	_		Positive power supply
VSS	_		Negative power supply, ground

Approximate internal connection circuits

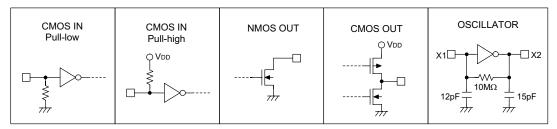



Absolute Maximum Ratings

Supply Voltage0.3V to 5V	Storage Temperature50°C to 125°C
Input Voltage $V_{SS} – 0.3V$ to $V_{DD} + 0.3V$	Operating Temperature20°C to 75°C

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Electrical Characteristics


f_{OSC}=32768Hz, Ta=25°C

Sumbal	Devementer		Test Conditions	N/1	T	Maria	Unit
Symbol	Parameter	V_{DD}	Conditions	Min.	Тур.	Max.	Unit
V _{DD}	Operating Voltage	_	_	1.2	1.5	1.7	V
VIL	Input Low Voltage	_		V_{SS}	_	$0.2V_{DD}$	
VIH	Input High Voltage	_		$0.8V_{DD}$	_	V_{DD}	V
I _{STB}	Standby Current	1.5V	V_{HK} =Floating (or V_{DD})		0.1	1	μA
I _{DD}	Operating Current	1.5V	1.5V No load		4	10	μA
I _{OL}	Output Sink Current of INT	1.5V	1.5V V _O =0.3V		1000	_	μA
t _A	Data Setup Time	1.5V	1.5V —		_	_	μs
t _B	Data Hold On Time	1.5V	.5V —		_	_	μs
t _C	Inter Digit Time	1.5V		5	_		μs
t _{DB}	Input Debounce Time (S1, S2, TIMER)	1.5V		_	31.25	_	ms
R _{HI}	Pull-high Resistance (HK, DI, SK)	1.5V	V _{IN} =0V	_	1	_	MΩ
R _{LO}	Pull-low Resistance (TIMER)	1.5V	V _{TIMER} =1.5V		5	_	MΩ
fosc	System Frequency	1.5V	Crystal=32768Hz	_	32768		Hz




Functional Description

Operational flow chart

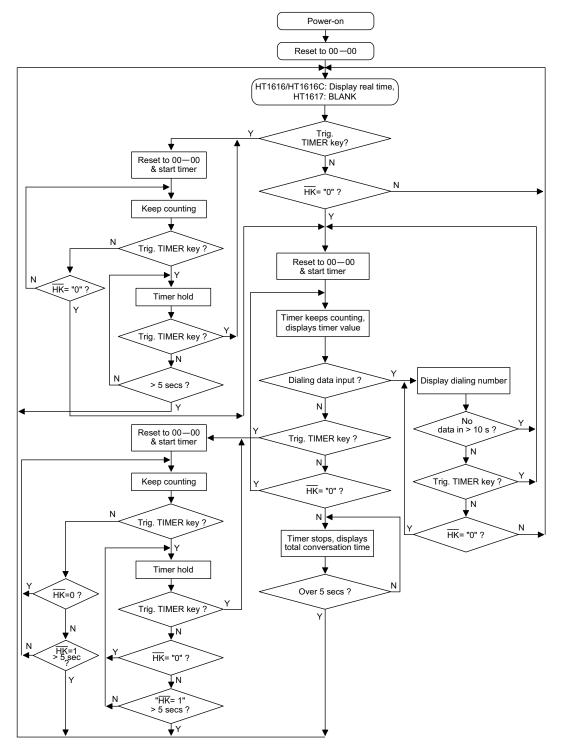




On-hook & Off-hook

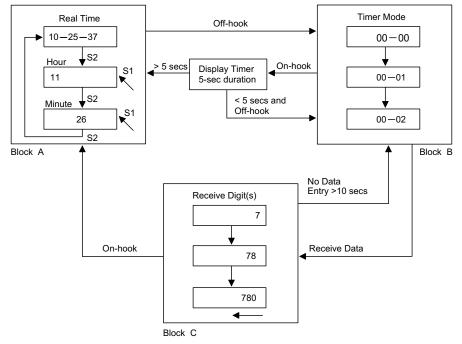


Note: Block A shows the switches S1 and S2 that are used for setting and selecting. Block B illustrates a timer mode when Off-hook; timer resets and starts to count the conversation time. Block C displays blinking "—". After Off-hook, dialing data is received and displayed on the LCD from left to right. When the entry interval is over 10 seconds, the timer resets and starts to count.

TIMER key function

The TIMER key is used to start/stop the timer (toggle). In real time mode, it can perform a stop- watch function.

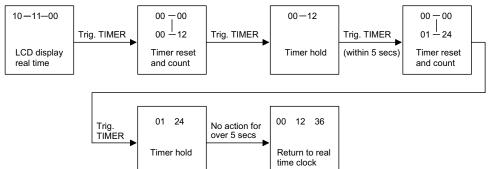

In the conversation timer mode, it can reset or hold the timer.

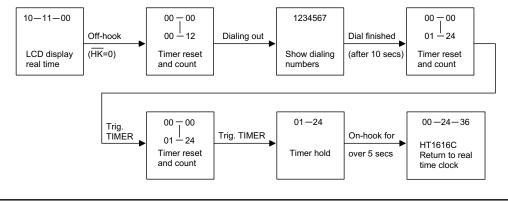



Data & Timing

• For telephone application

The HT1616C is designed to display telephone numbers derived from the HT93XXX series telephone dialer ICs. When the MODE pad is connected to VSS, the corresponding data is illustrated in the following table (MODE=0).

		Data	.		
Key-In	b3	b2	b1	b0	Display
Blank	0	0	0	0	Blank
1	0	0	0	1	I
2	0	0	1	0	2
3	0	0	1	1	Э
4	0	1	0	0	Ч
5	0	1	0	1	S
6	0	1	1	0	6
7	0	1	1	1	-1
8	1	0	0	0	8
9	1	0	0	1	9
0	1	0	1	0	0
*	1	1	0	1	·
#	1	1	0	0	
F	1	0	1	1	F
Р	1	1	1	0	Ρ
	1	1	1	1	_

• For instrument or μc application

The HT1616C is also capable of displaying BCD data generated from instrument or a μC system. The corresponding data and timing is shown in the Data Latch Timing diagram. Before the data is transmitted to the HT1616C, the HK pin should be pulled-low or continuously kept low. The HT1616C is then ready to receive the data. At the falling edge of the clock the data is shifted in to the IC. After all the data is sent to the HT1616C, the \overline{SK} pin is set low to avoid switching to the timer mode.

When the MODE pad is connected to "Low", the data code and display patterns are shown in the following table:

	Data	Diamlari		
b3	b2	b1	b0	Display
0	0	0	0	Blank
0	0	0	1	-
0	0	1	0	2
0	0	1	1	m
0	1	0	0	Ţ
0	1	0	1	Ŋ
0	1	1	0	ŋ
0	1	1	1	
1	0	0	0	8
1	0	0	1	9
1	0	1	0	
1	1	0	1	<u> </u>
1	1	0	0	
1	0	1	1	F
1	1	1	0	ρ
1	1	1	1	_



On the other hand, when MODE pad is connected to "High" the data code and display patterns are shown in the following table:


(MODE=1)

(MODE=1)


	Da	Distant			
b4	b3	b2	b1	b0	Display
0	0	0	0	0	Blank
0	0	0	0	1	l
0	0	0	1	0	2
0	0	0	1	1	Э
0	0	1	0	0	Ч
0	0	1	0	1	5
0	0	1	1	0	6
0	0	1	1	1	-1
0	1	0	0	0	8
0	1	0	0	1	9
0	1	0	1	0	
0	1	1	0	1	L
0	1	1	0	0	
0	1	0	1	1	F
0	1	1	1	0	ρ
0	1	1	1	1	_

	Distant				
b4	b3	b2	b1	b0	Display
1	0	0	0	0	8
1	0	0	0	1	Ь
1	0	0	1	0	
1	0	0	1	1	8
1	0	1	0	0	Ξ
1	0	1	0	1	h
1	0	1	1	0	H
1	0	1	1	1	
1	1	0	0	0	0
1	1	0	0	1	9
1	1	0	1	0	ı—
1	1	1	0	1	
1	1	1	0	0	
1	1	0	1	1	Ч
1	1	1	1	0	
1	1	1	1	1	-1

• Data latch timing for 4-bit pattern (MODE=0)

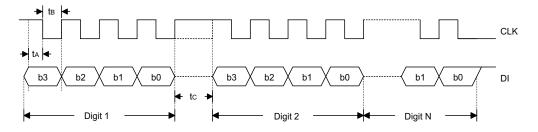

• Data latch timing for 5-bit pattern (MODE=1)

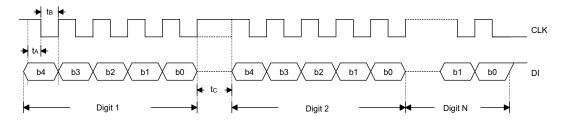


Rev. 1.10



Application Circuits


For telephone interfacing (with batteries)

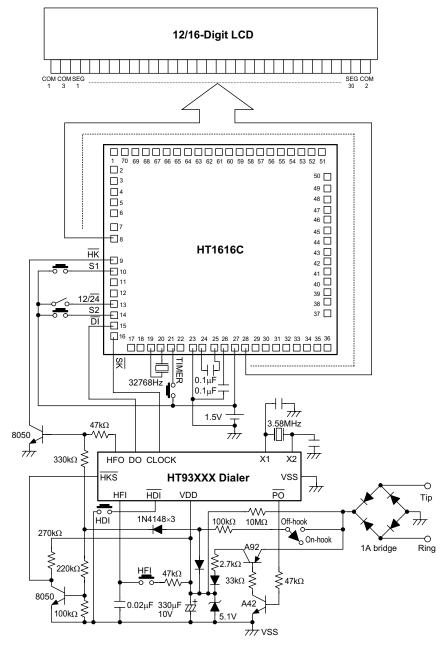

* The IC substrate should be connected to VDD in the PCB layout artwork.




For telephone interfacing (without batteries)

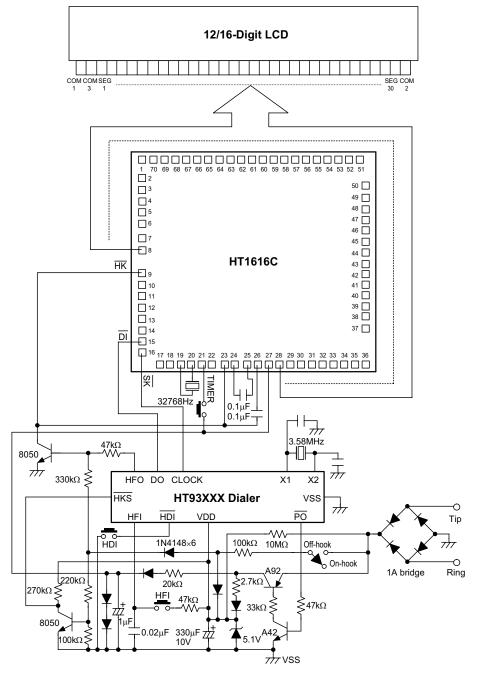

* The IC substrate should be connected to VDD in the PCB layout artwork.



For instrument or μC use

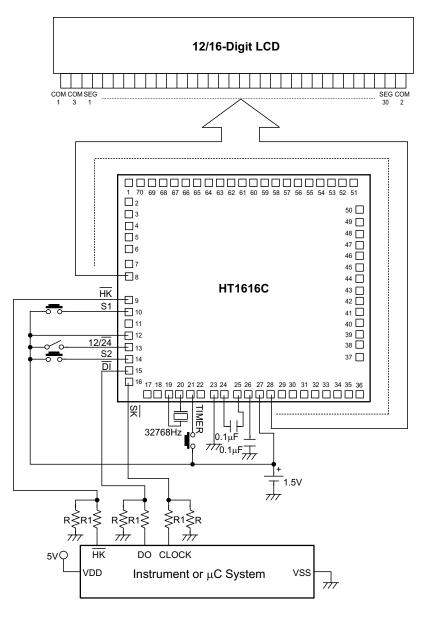

* The IC substrate should be connected to VDD in the PCB layout artwork.


Note: To drive SK, DI and HK, an open drain NMOS output structure is recommended. To drive SK, DI and HK with a CMOS output structure, a voltage divider is needed (R=4.3kΩ, R1=10kΩ).



LCD Configurations


For 12-digit application

• Segment electrode side




LCD driving system 1/2 bias, 1/3 duty, 3V

Common electrode side




LCD connection

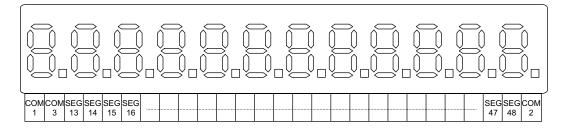


For 16-digit application

• Segment electrode side




LCD driving system 1/2 bias, 1/3 duty, 3V

Common electrode side



• LCD connection



Holtek Semiconductor Inc. (Headquarters)

No.3, Creation Rd. II, Science-based Industrial Park, Hsinchu, Taiwan Tel: 886-3-563-1999 Fax: 886-3-563-1189 http://www.holtek.com.tw

Holtek Semiconductor Inc. (Sales Office)

11F, No.576, Sec.7 Chung Hsiao E. Rd., Taipei, Taiwan Tel: 886-2-2782-9635 Fax: 886-2-2782-9636 Fax: 886-2-2782-7128 (International sales hotline)

Holtek Semiconductor (Shanghai) Inc. 7th Floor, Building 2, No.889, Yi Shan Rd., Shanghai, China Tel: 021-6485-5560 Fax: 021-6485-0313 http://www.holtek.com.cn

Holtek Semiconductor (Hong Kong) Ltd.

Block A, 3/F, Tin On Industrial Building, 777-779 Cheung Sha Wan Rd., Kowloon, Hong Kong Tel: 852-2-745-8288 Fax: 852-2-742-8657

Holmate Semiconductor, Inc. 46712 Fremont Blvd., Fremont, CA 94538 Tel: 510-252-9880 Fax: 510-252-9885 http://www.holmate.com

Copyright © 2001 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at http://www.holtek.com.tw.