

ORDERING INFORMATION

| Device | Temperature Range | Package |
|---------|-------------------|-----------|
| MC1552G | -55°C to +125°C | Metal Can |
| MC1553G | -55°C to +125°C | Metal Can |

MC1552G MC1553G


VIDEO AMPLIFIERS

These devices consist of a three-stage, direct-coupled, common-emitter cascade incorporating series feedback to achieve stable voltage gain, low distortion, and wide bandwidth. They employ a temperature-compensated dc feedback loop to stabilize the operating point and a current-biased emitter follower output and are intended for use as either wide-band linear amplifiers or as fast rise pulse amplifiers.


- High Gain – 34 dB \pm 1 dB (MC1552)
52 dB \pm 1 dB (MC1553)
- Wide Bandwidth – 40 MHz (MC1552)
35 MHz (MC1553)
- Low Distortion – 0.2% at 200 kHz
- Low Temperature Drift – \pm 0.002 dB/°C

HIGH FREQUENCY VIDEO AMPLIFIER SILICON MONOLITHIC INTEGRATED CIRCUIT

CASE 603B
METAL PACKAGE



PIN CONNECTIONS



(Top View)

MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$ unless otherwise noted.)

| Rating | Symbol | Value | Unit |
|--|-----------|-------------|-------------|
| Power Supply Voltage, Pin 9 | V_{CC} | 9.0 | Vdc |
| Input Differential Voltage, Pin 1 to Pin 2 ($R_S = 500$ ohms) | V_{ID} | 1.0 | V(rms) |
| Power Dissipation (Package Limitation) Derate above $T_A = +25^\circ\text{C}$ | P_D | 680 4.6 | mW mW/°C |
| Operating Ambient Temperature Range | T_A | -55 to +125 | °C |
| Storage Temperature Range | T_{stg} | -65 to +150 | °C |

REPRESENTATIVE CIRCUIT SCHEMATICS

FIGURE 1 – MC1552 (LOW GAIN)


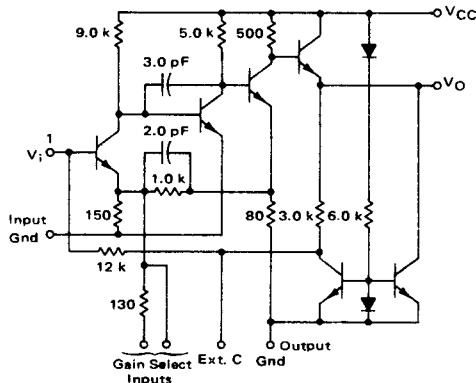


FIGURE 2 – MC1553 (HIGH GAIN)

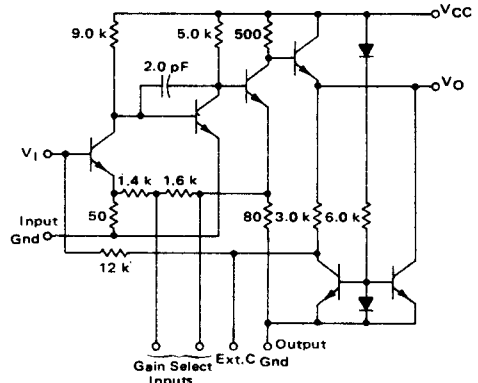

MC1552G, MC1553G

ELECTRICAL CHARACTERISTICS (Unless otherwise noted, $T_A = 25^\circ\text{C}$, $V_{CC} = 6.0\text{ V}$ and specification applies for all Gain Selection options.)

| Characteristic | Test Figure | Symbol | MC1552G | | | MC1553G | | | Unit |
|---|-------------|------------------|----------------------|------------------------|-----------------------|------------------------|------------------------|------------------------|------------|
| | | | Min | Typ | Max | Min | Typ | Max | |
| Voltage Gain (Gain Option = 50) (Gain Option = 100) (Gain Option = 200) (Gain Option = 400) $-55^\circ\text{C} < T_A < 125^\circ\text{C}$ (Gain Option = 50) (Gain Option = 100) (Gain Option = 200) (Gain Option = 400) | 3 | A_V | 44 87 -- -- | 50 100 -- -- | 56 113 -- -- | -- -- 175 350 | -- -- 200 400 | -- -- 225 450 | V/V |
| Voltage Gain Variation ($-55^\circ\text{C} < T_A < 125^\circ\text{C}$) | 3 | ΔA_V | -- | ± 0.2 | -- | -- | $+0.2$ | -- | dB |
| Small-Signal Bandwidth (Gain Option = 50) (Gain Option = 100) (Gain Option = 200) (Gain Option = 400) | 3,6 | BW | 21 17 -- -- | 40 35 -- -- | -- -- -- -- | -- -- 17 7.5 | -- -- 35 15 | -- -- -- -- | MHz |
| Input Impedance ($f = 100\text{ kHz}$, $R_L = 1.0\text{ k}\Omega$) | | z_i | 7.0 | 10 | -- | 7.0 | 10 | -- | k Ω |
| Output Impedance ($f = 100\text{ kHz}$, $R_S = 50\ \Omega$) | | z_o | -- | 16 | 50 | -- | 16 | 50 | Ω |
| DC Output Voltage ($-55^\circ\text{C} < T_A < 125^\circ\text{C}$) | 3 | V_O | 2.5 2.3 | 2.9 | 3.2 3.4 | 2.5 2.4 | 2.9 | 3.2 3.3 | Vdc |
| DC Output Voltage Variation ($-55^\circ\text{C} < T_A < 125^\circ\text{C}$) | 3 | ΔV_O | -- | ± 0.05 | -- | -- | ± 0.05 | -- | Vdc |
| Output Voltage Range ($z_L < 1.0\text{ k}\Omega$, $C_L = 100\text{ mV rms}$) ($-55^\circ\text{C} < T_A < 125^\circ\text{C}$) | 3 | V_{OR} | 3.6 | 4.2 | -- | 3.6 3.4 | 4.2 | -- | V p-p |
| Power Supply Current ($-55^\circ\text{C} < T_A < 125^\circ\text{C}$) | -- | I_{CC} | -- | 12.5 -- | 20 24 | -- | 12.5 -- | 20 23 | mA |
| Propagation Delay Time (Gain Option = 50) (Gain Option = 100) (Gain Option = 200) (Gain Option = 400) | 3,4 | t_{PHL} | -- | 8.0 9.0 -- -- | -- -- -- -- | -- -- -- -- | -- -- 10 25 | -- -- -- -- | ns |
| Transition (Rise) Time (Gain Option = 50) (Gain Option = 100) (Gain Option = 200) (Gain Option = 400) | 3,4 | t_{THL} | -- | 9.0 12 -- -- | 16 20 -- -- | -- -- -- -- | -- -- 11 30 | -- -- 20 45 | ns |
| Overshoot | 3,4 | $100 V_{OS}/V_p$ | -- | 5.0 | -- | -- | 5.0 | -- | % |
| Noise Figure ($R_S = 400\ \Omega$, $f_o = 30\text{ MHz}$, BW = 3.0 MHz) (See Figure 14) | -- | NF | -- | 3.0 | -- | -- | 3.0 | -- | dB |
| Total Harmonic Distortion ($V_O = 2.0\text{ V p-p}$, $f = 200\text{ kHz}$, $R_L = 1.0\text{ k}\Omega$) | -- | THD | -- | 0.2 | -- | -- | 0.2 | -- | % |

NOTES

- Ground Pin 6 as close to package as possible to minimize overshoot. Best results are usually obtained by directly grounding the package.
- If large input and output coupling capacitors are used, place a shield between them to avoid input-output coupling.
- A high-frequency capacitor must always be used to bypass the power supply. This capacitor should be as close to the circuit as possible.
- Voltage gain can be adjusted to any value between 50 and 3000 by connecting an external resistor from Pin 4 to ground on MC1552, or from Pin 3 to ground on MC1553, as shown in

Figure 8. Under these conditions, the following equations must be used to determine C1 and C2 rather than the circuits shown in Figure 5.

$$\text{Fig. 5b } C1 = \frac{1}{2\pi f_c (1.7 \times 10^4)} \text{ Farads; } C2 = 8 C1 (V_O/V_i) \text{ Farads}$$

$$\text{Fig. 5c } C1 = \frac{V_O/V_i}{2\pi f_c (1.5 \times 10^4)} \text{ Farads}$$

$$\text{Fig. 5d } C2 = \frac{V_O/V_i}{2\pi f_c (3 \times 10^3)} \text{ Farads}$$

FIGURE 3 – TEST CIRCUIT


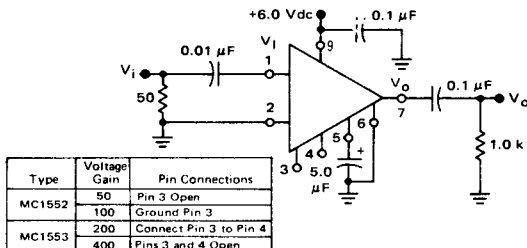



FIGURE 4 – PULSE RESPONSE DEFINITIONS

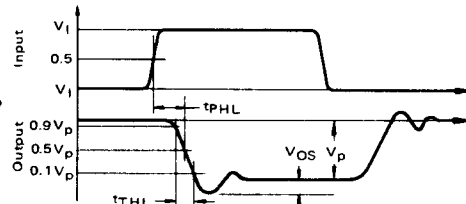

TYPICAL CHARACTERISTICS


T_A = +25°C

FIGURE 5a – FREQUENCY RESPONSE

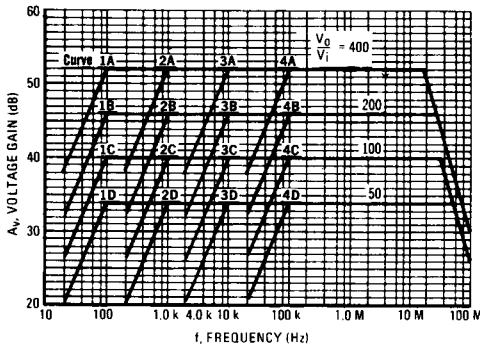

TEST CIRCUITS FOR FREQUENCY RESPONSE


FIGURE 5b – CAPACITIVE COUPLED INPUT (R_S < 5 kΩ)



| Curve No. | C1 (μF) | C2 (μF) |
|-----------|---------|---------|
| 1A | 0.1 | 250 |
| 1B | 0.1 | 150 |
| 1C | 0.1 | 70 |
| 1D | 0.1 | 40 |


| Curve No. | C1 (μF) | | C2 (μF) | |
|-----------|---------|------|---------|--|
| | (pF) | | | |
| 2A | 0.01 | 30 | | |
| 2B | 0.01 | 18 | | |
| 2C | 0.01 | 8.0 | | |
| 2D | 0.01 | 4.0 | | |
| 3A | 1000 | 3.0 | | |
| 3B | 1000 | 1.8 | | |
| 3C | 1000 | 0.8 | | |
| 3D | 1000 | 0.4 | | |
| 4A | 100 | 0.3 | | |
| 4B | 100 | 0.18 | | |
| 4C | 100 | 0.08 | | |
| 4D | 100 | 0.04 | | |

FIGURE 5c – CAPACITIVE COUPLED INPUT (R_S < 500 Ω)



| Curve No. | C1 (μF) | Curve No. | C1 (μF) |
|-----------|---------|-----------|---------|
| 1A | 20 | 3A | 0.4 |
| 1B | 10 | 3B | 0.2 |
| 1C | 7.0 | 3C | 0.1 |
| 1D | 3.0 | 3D | 0.06 |
| 2A | 3.0 | 4A | 0.04 |
| 2B | 1.0 | 4B | 0.02 |
| 2C | 0.8 | 4C | 0.01 |
| 2D | 0.5 | 4D | 0.007 |

FIGURE 5d – TRANSFORMER COUPLED INPUT



| Curve No. | C2 (μF) | Curve No. | C1 (μF) |
|-----------|---------|-----------|---------|
| 1A | 200 | 3A | 2.0 |
| 1B | 100 | 3B | 1.0 |
| 1C | 70 | 3C | 0.7 |
| 1D | 30 | 3D | 0.3 |
| 2A | 20 | 4A | 0.2 |
| 2B | 10 | 4B | 0.1 |
| 2C | 7.0 | 4C | 0.07 |
| 2D | 3.0 | 4D | 0.03 |

FIGURE 6 – VOLTAGE GAIN versus FREQUENCY

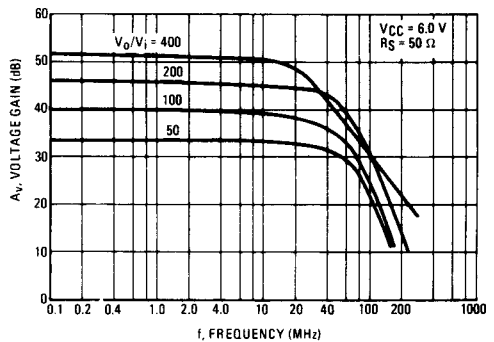


FIGURE 7 – MAXIMUM NEGATIVE SWING SLEW RATE versus LOAD CAPACITANCE


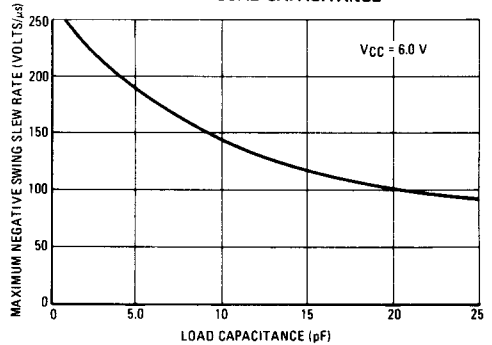


FIGURE 8 – VOLTAGE GAIN ADJUSTMENT BY USE OF EXTERNAL RESISTOR

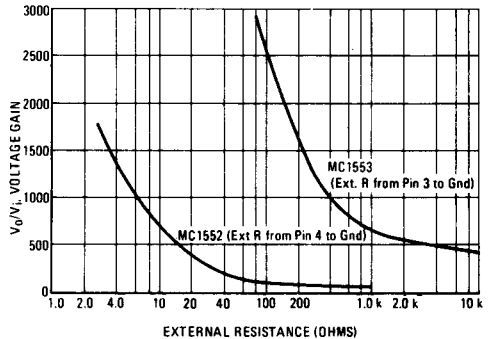

6

INPUT ADMITTANCE

($V_{CC} = 6.0 \text{ Vdc}$, $R_L = 1.0 \text{ k}\Omega$, $T_A = +25^\circ\text{C}$)

FIGURE 9 – GAIN = 50

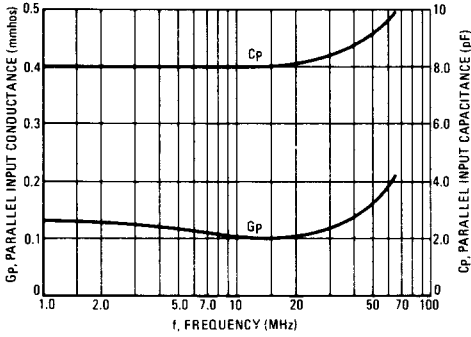


FIGURE 10 – GAIN = 100

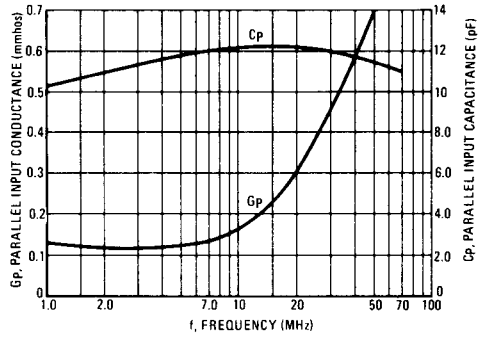


FIGURE 11 – GAIN = 200

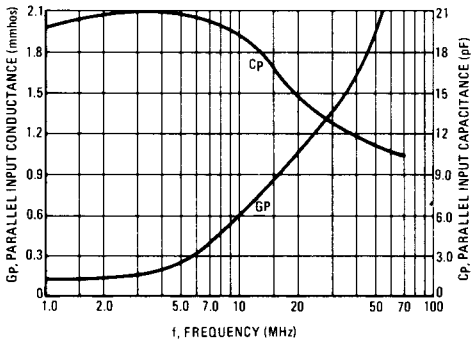


FIGURE 12 – GAIN = 400

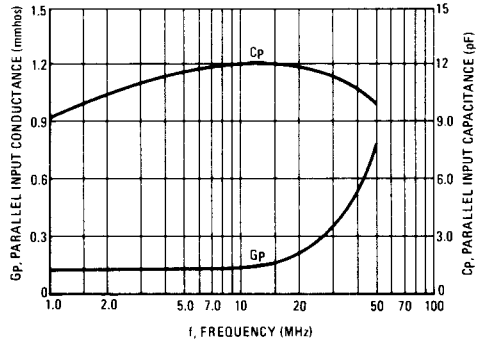


FIGURE 13 – OUTPUT IMPEDANCE versus FREQUENCY

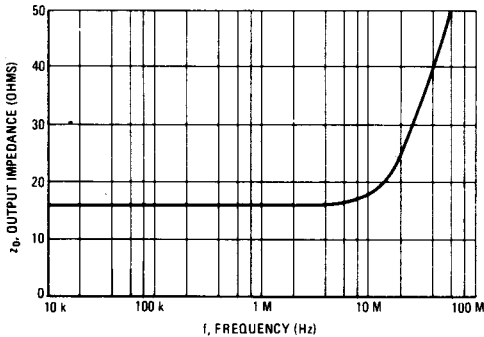


FIGURE 14 – BANDWIDTH versus SOURCE RESISTANCE

