


# DATA SHEET

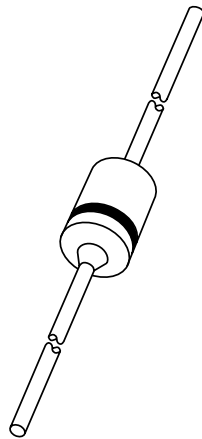

## **BYD71 series** Ultra fast low-loss controlled avalanche rectifiers

Product specification  
Supersedes data of 1996 May 24

1996 Sep 19

# Ultra fast low-loss controlled avalanche rectifiers

## BYD71 series

**FEATURES**


- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Available in ammo-pack.

**DESCRIPTION**

Cavity free cylindrical SOD91 glass package through Implotec™(1) technology. This package is

hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

(1) Implotec is a trademark of Philips.

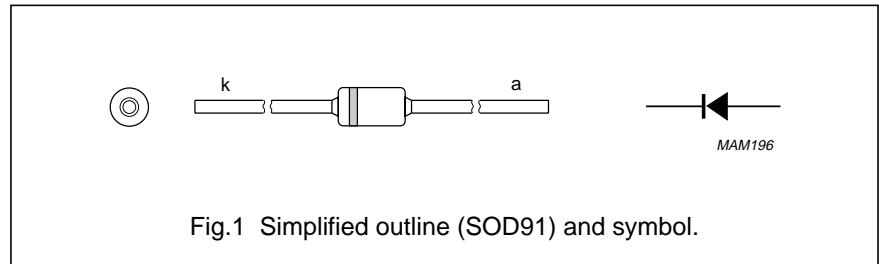

**LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V <sub>RRM</sub>	repetitive peak reverse voltage				
	BYD71A		–	50	V
	BYD71B		–	100	V
	BYD71C		–	150	V
	BYD71D		–	200	V
	BYD71E		–	250	V
	BYD71F		–	300	V
	BYD71G		–	400	V
V <sub>R</sub>	continuous reverse voltage				
	BYD71A		–	50	V
	BYD71B		–	100	V
	BYD71C		–	150	V
	BYD71D		–	200	V
	BYD71E		–	250	V
	BYD71F		–	300	V
	BYD71G		–	400	V
I <sub>F(AV)</sub>	average forward current	T <sub>tp</sub> = 55 °C; lead length = 10 mm; see Figs 2 and 3;	–	0.56	A
	BYD71A to D	averaged over any 20 ms period; see also Figs 10 and 11	–	0.54	A
I <sub>F(AV)</sub>	average forward current	T <sub>amb</sub> = 60 °C; PCB mounting (see Fig.16); see Figs 4 and 5;	–	0.43	A
	BYD71A to D	averaged over any 20 ms period; see also Figs 10 and 11	–	0.41	A
	BYD71E to G				

## Ultra fast low-loss controlled avalanche rectifiers

## BYD71 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$I_{FRM}$	repetitive peak forward current	$T_{tp} = 55\text{ °C}$ ; see Figs 6 and 7	–	4.7	A
	BYD71A to D			5.0	A
$I_{FRM}$	repetitive peak forward current	$T_{amb} = 60\text{ °C}$ ; see Figs 8 and 9	–	3.7	A
	BYD71E to G			3.9	A
$I_{FSM}$	non-repetitive peak forward current	$t = 10\text{ ms}$ half sine wave; $T_j = T_{j\max}$ prior to surge; $V_R = V_{RRM\max}$	–	7	A
$P_{RSM}$	non-repetitive peak reverse power dissipation	$t = 20\text{ }\mu\text{s}$ half sine wave; $T_j = T_{j\max}$ prior to surge	–	250	W
	BYD71A to D			150	W
$T_{stg}$	storage temperature		–65	+175	°C
$T_j$	junction temperature		–65	+175	°C

### ELECTRICAL CHARACTERISTICS

$T_j = 25\text{ °C}$  unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT			
$V_F$	forward voltage	$I_F = 0.5\text{ A}$ ; $T_j = T_{j\max}$ ; see Figs 12 and 13	–	–	0.84	V			
	BYD71A to D				0.90	V			
$V_F$	forward voltage	$I_F = 0.5\text{ A}$ ; see Figs 12 and 13	–	–	1.05	V			
	BYD71E to G				1.11	V			
$V_{(BR)R}$	reverse avalanche breakdown voltage	$I_R = 0.1\text{ mA}$							
	BYD71A					55	–	–	V
	BYD71B					110	–	–	V
	BYD71C					165	–	–	V
	BYD71D					220	–	–	V
	BYD71E					275	–	–	V
	BYD71F					330	–	–	V
BYD71G	440	–	–	V					
$I_R$	reverse current	$V_R = V_{RRM\max}$ ; see Fig 14	–	–	1	$\mu\text{A}$			
		$V_R = V_{RRM\max}$ ; $T_j = 165\text{ °C}$ ; see Fig 14	–	–	75	$\mu\text{A}$			
$t_{rr}$	reverse recovery time	when switched from $I_F = 0.5\text{ A}$ to $I_R = 1\text{ A}$ ; measured at $I_R = 0.25\text{ A}$ see Fig 18	–	–	25	ns			
	BYD71A to D				50	ns			
	BYD71E to G								

# Ultra fast low-loss controlled avalanche rectifiers

## BYD71 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
C <sub>d</sub>	diode capacitance	f = 1 MHz; V <sub>R</sub> = 0 V; see Fig.15	–	25	–	pF
	BYD71A to D					
	BYD71E to G		–	20	–	pF
$\left  \frac{dI_R}{dt} \right $	maximum slope of reverse recovery current	when switched from I <sub>F</sub> = 1 A to V <sub>R</sub> ≥ 30 V and dI <sub>F</sub> /dt = –1 A/μs; see Fig.17	–	–	4	A/μs
	BYD71A to D					
	BYD71E to G		–	–	5	A/μs

### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R <sub>th j-tp</sub>	thermal resistance from junction to tie-point	lead length = 10 mm	180	K/W
R <sub>th j-a</sub>	thermal resistance from junction to ambient	note 1	250	K/W





#### Note

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer ≥40 μm, see Fig.16. For more information please refer to the "General Part of associated Handbook".

Ultra fast low-loss  
controlled avalanche rectifiers



BYD71 series

GRAPHICAL DATA

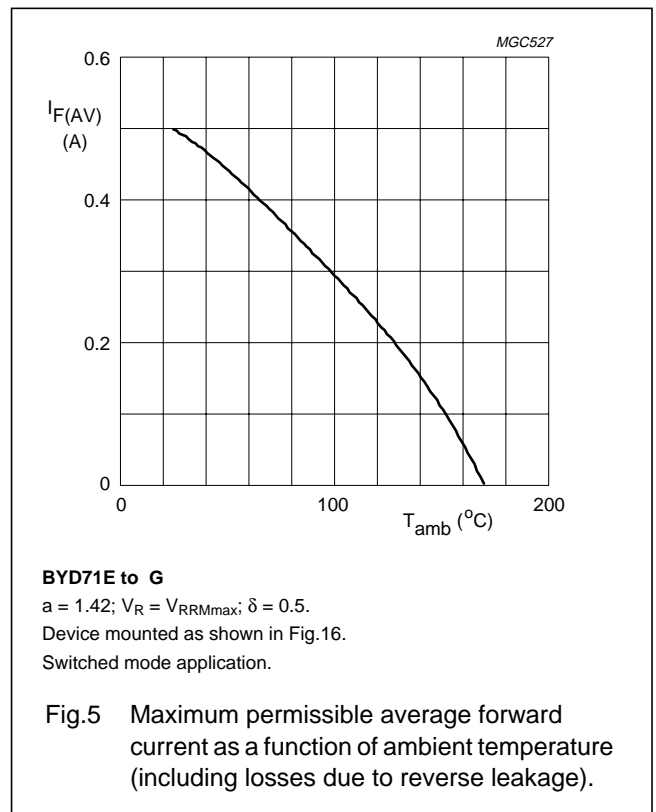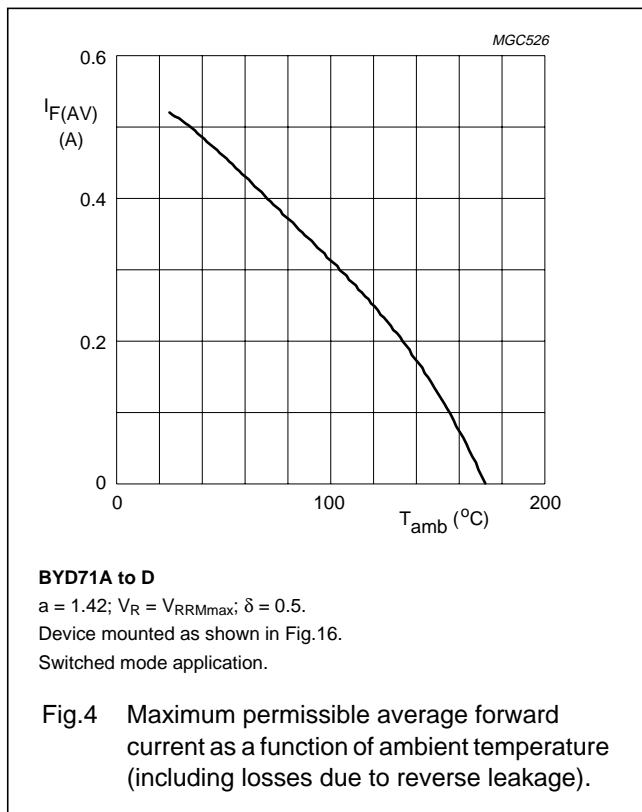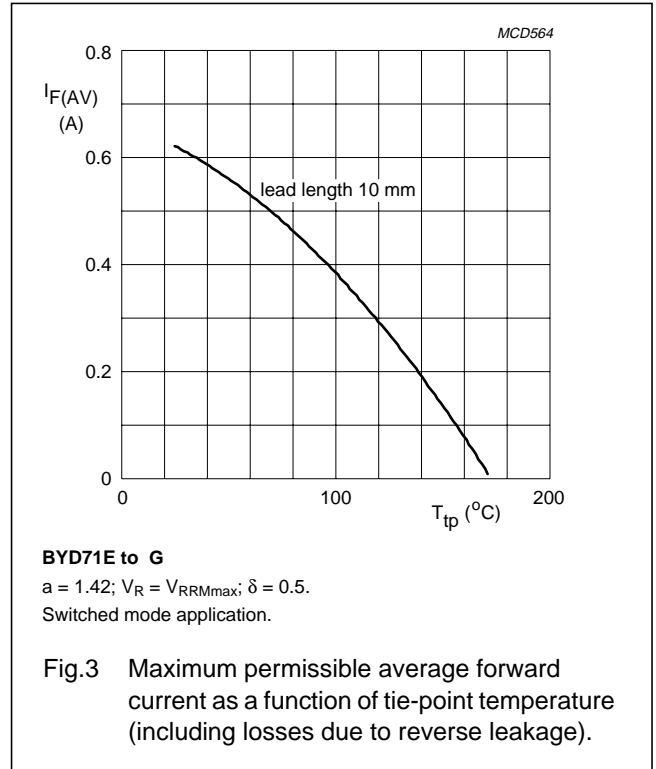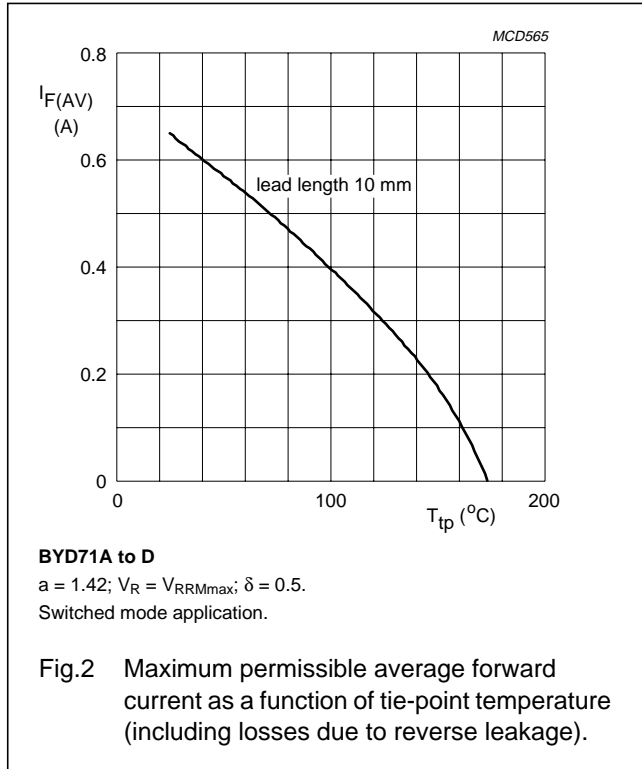



Ultra fast low-loss  
controlled avalanche rectifiers

BYD71 series

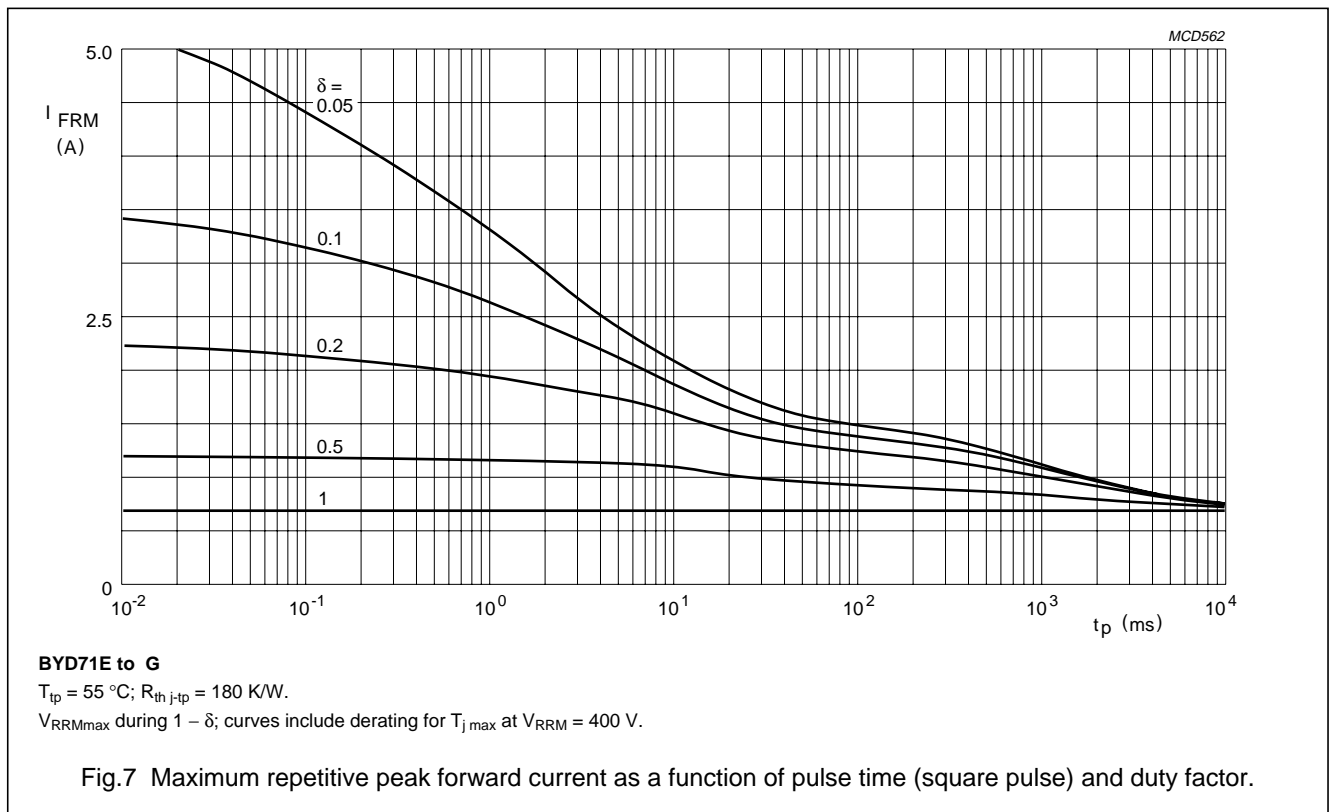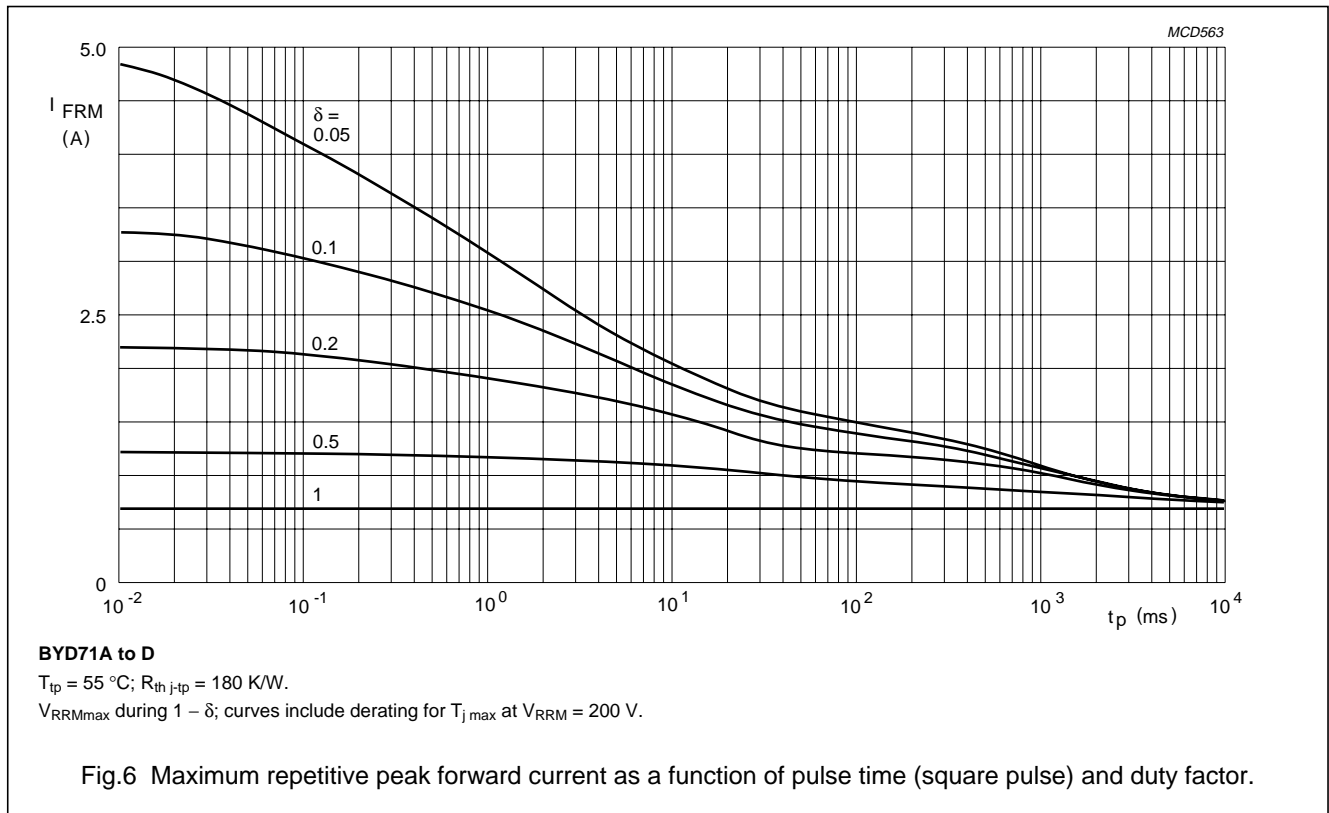





Ultra fast low-loss  
controlled avalanche rectifiers

BYD71 series

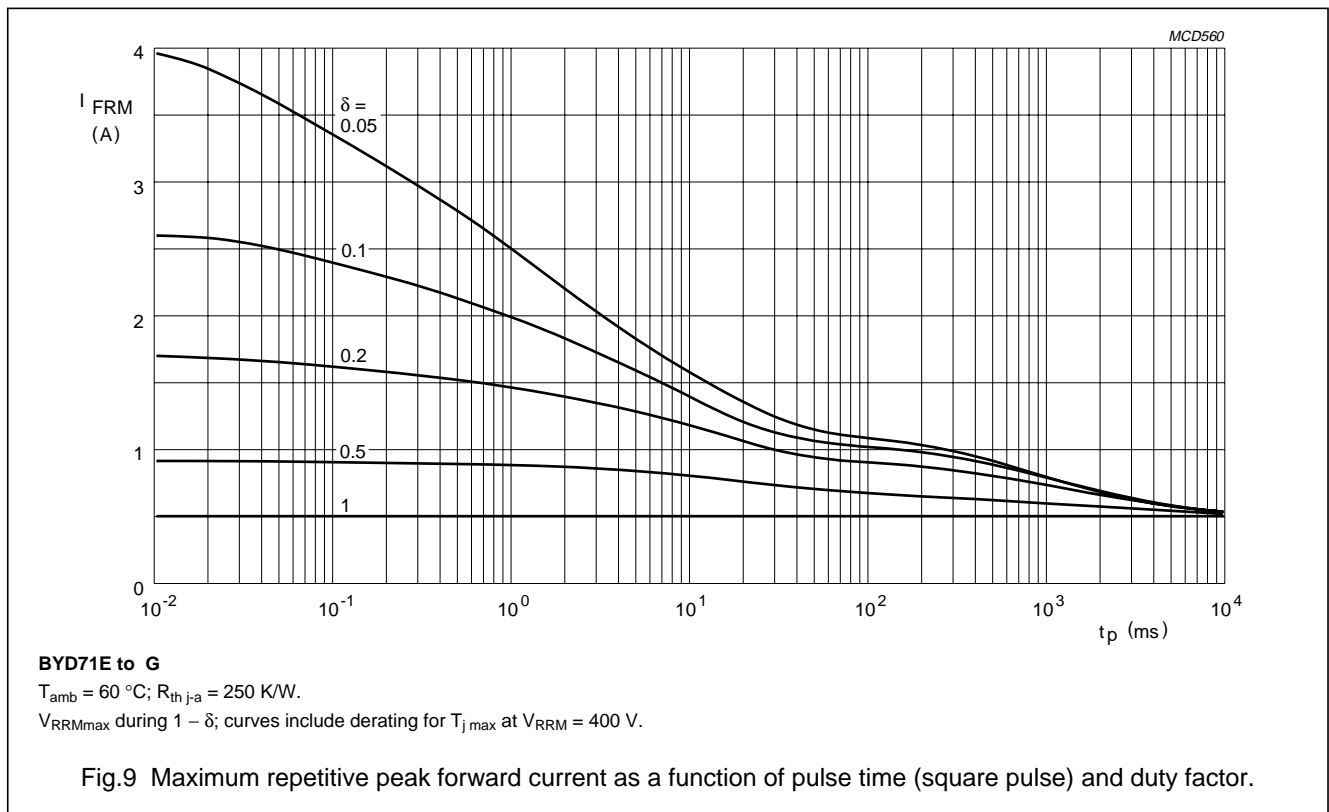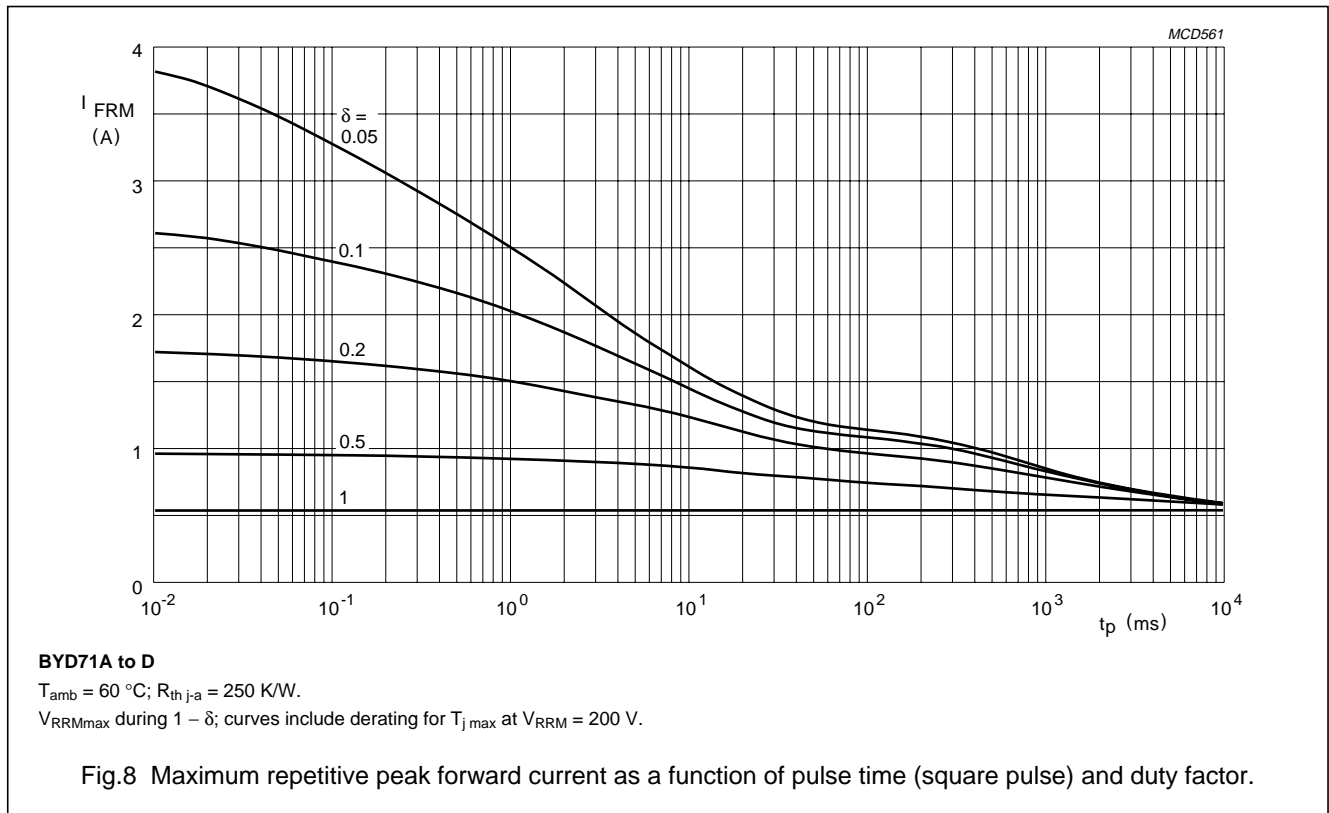

Ultra fast low-loss  
controlled avalanche rectifiers





BYD71 series

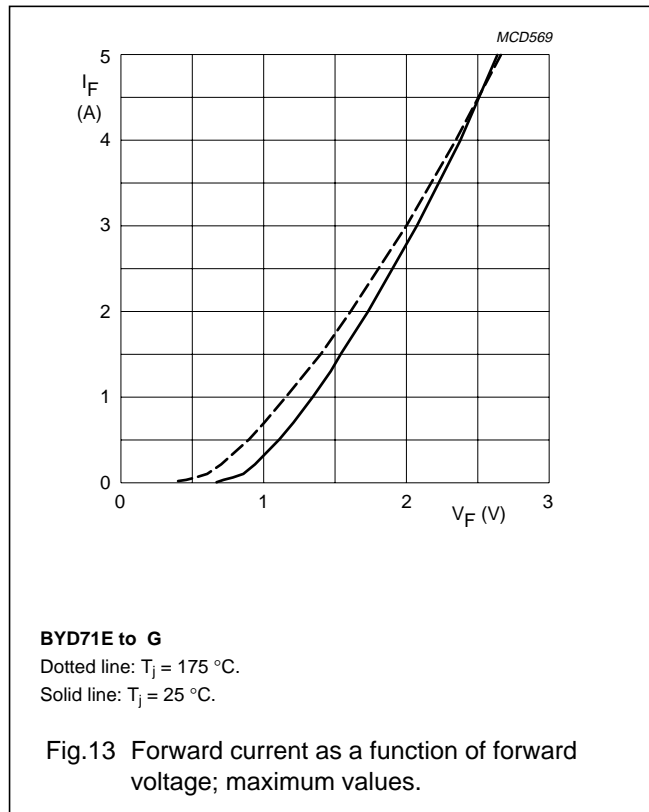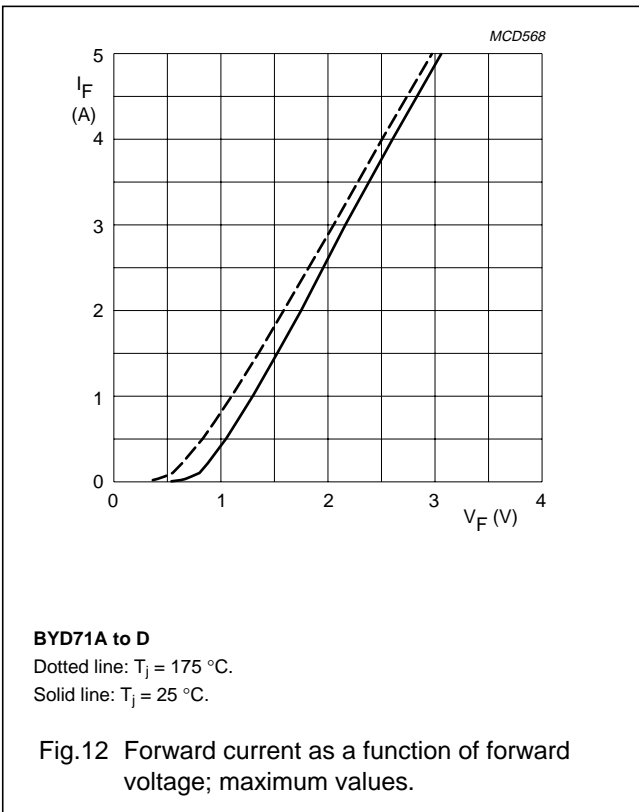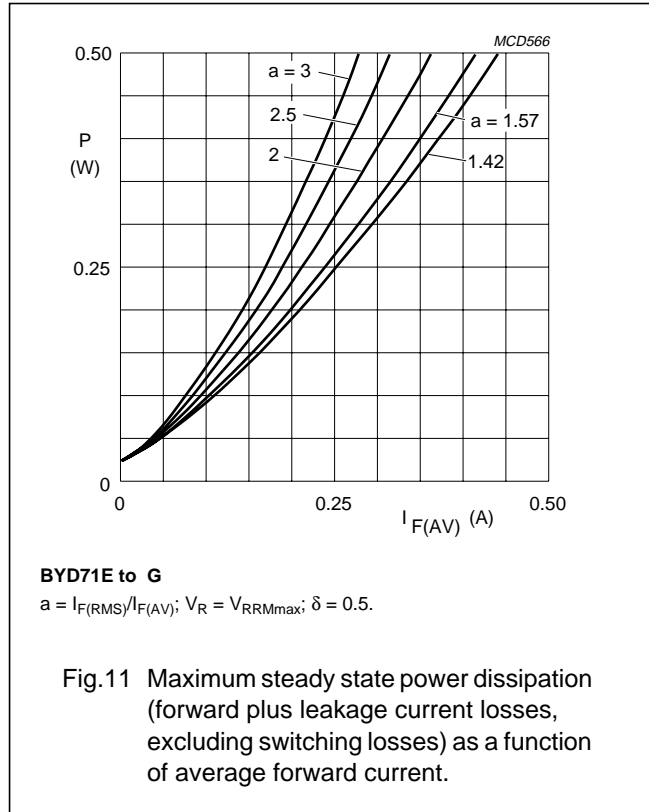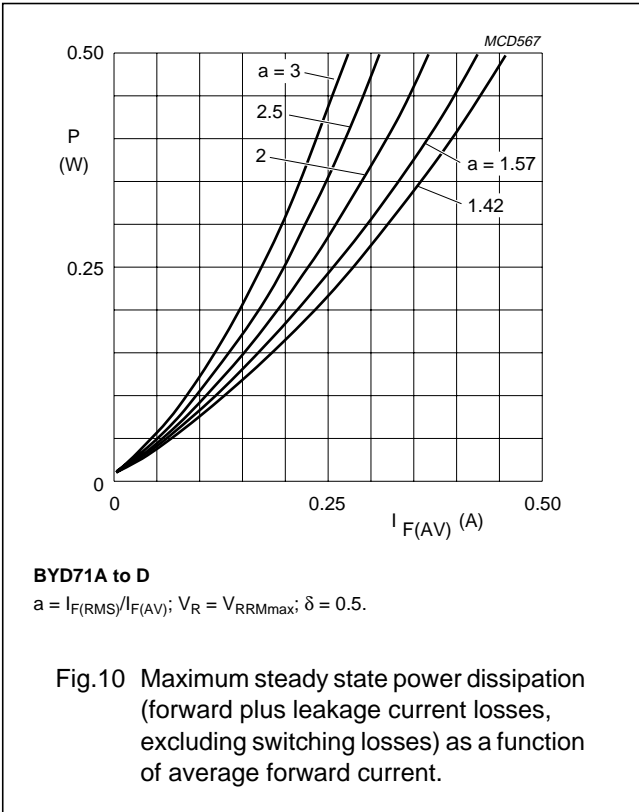





Ultra fast low-loss  
controlled avalanche rectifiers

BYD71 series

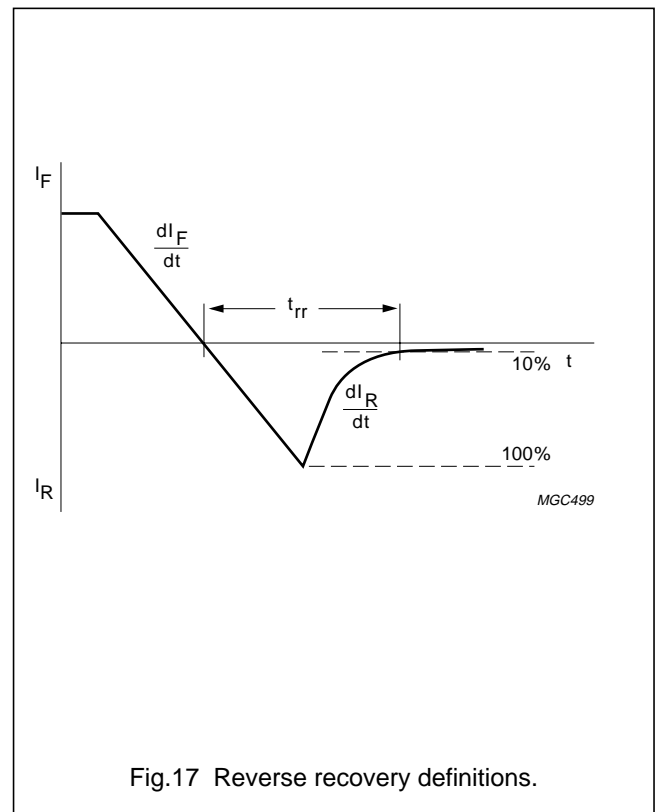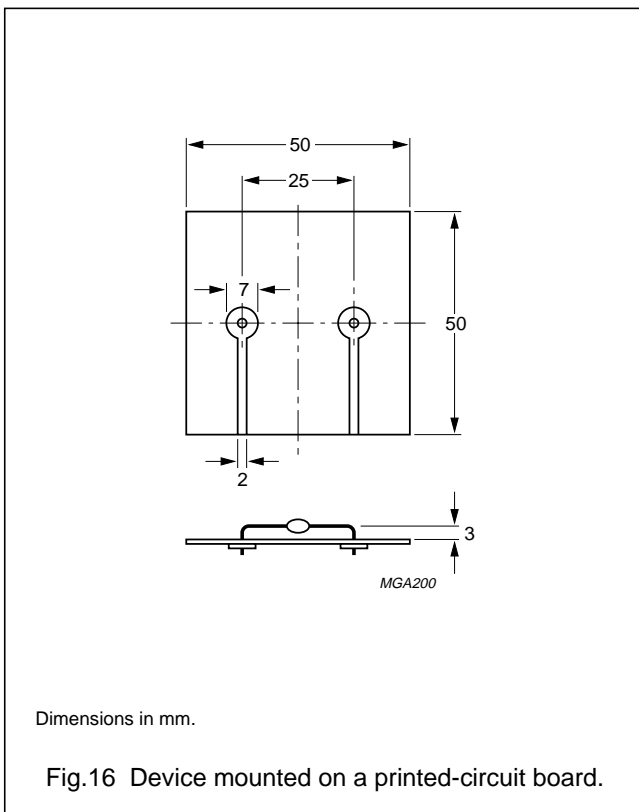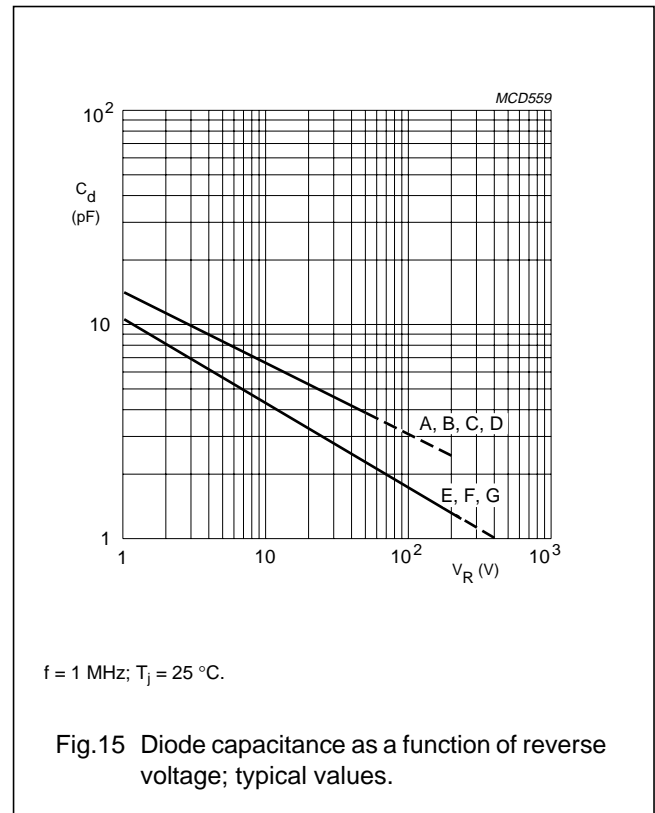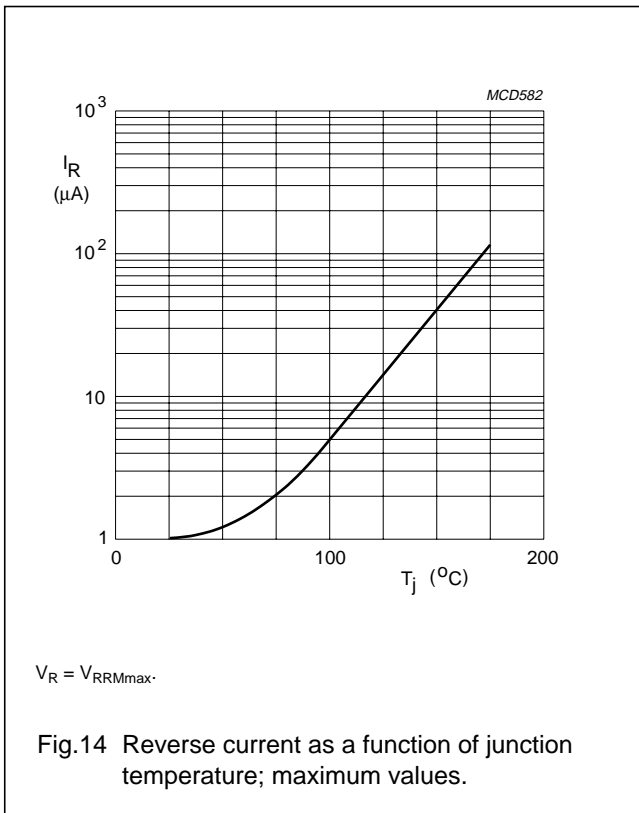

# Ultra fast low-loss controlled avalanche rectifiers

## BYD71 series

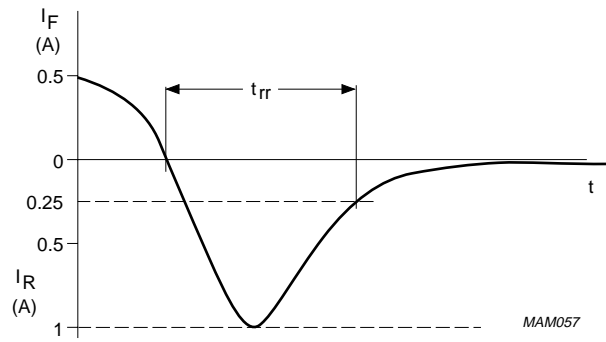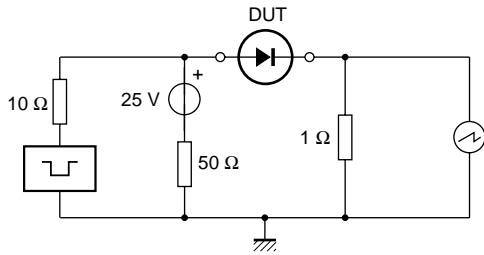


Input impedance oscilloscope: 1 M $\Omega$ , 22 pF;  $t_r \leq 7$  ns.  
Source impedance: 50  $\Omega$ ;  $t_r \leq 15$  ns.

Fig.18 Test circuit and reverse recovery time waveform and definition.

Ultra fast low-loss  
controlled avalanche rectifiers

BYD71 series

PACKAGE OUTLINE

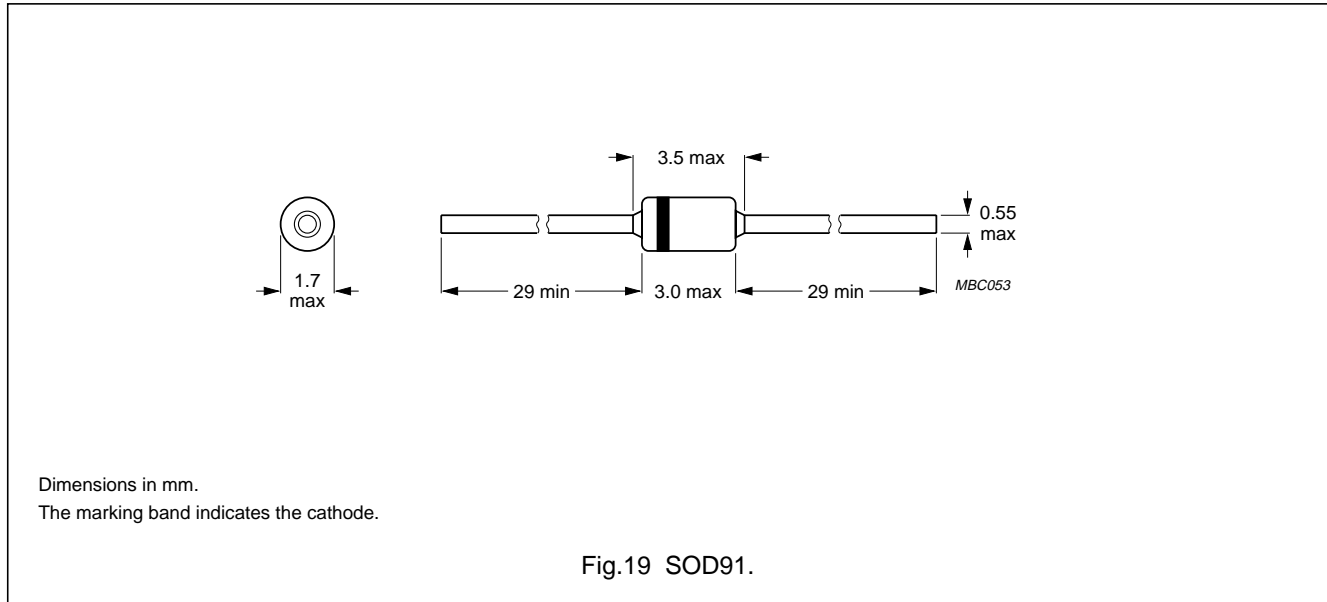

DEFINITIONS

<b>Data Sheet Status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.