

## FEATURES

- Small Form Factor Package(GW): 9 pins coplanar
- Integrated Design Optimizes Performance at Bit Rates up to 12.5Gb/s
- High Sensitivity: -19dBm (typ.)
- Electrical Differential Output
- Wide Bandwidth: 11GHz (typ.)



## APPLICATIONS

This PIN with HBT preamplifier is intended to function as an optical receiver at 1,310nm or 1,530-1,620nm in SONET, SDH, DWDM or other optical fiber systems operating up to 12.5Gb/s. The typical transimpedance ( $Z_t$ ) value of 1,300 $\Omega$  optimizes the total bandwidth for 10Gb/s application. The detector preamplifier is DC coupled and has an electrical differential output.

## DESCRIPTION

The FRM5J141GW incorporates a high bandwidth InGaAs PIN photo diode, a GaAs HBT IC amplifier in a hermetically sealed Small Form Factor package (SFF). The PIN is processed with modern MOVPE techniques resulting in a reliable performance over a wide range of operating conditions. The lens coupling system and the single mode fiber are assembled using Nd YAG welding.

## ABSOLUTE MAXIMUM RATINGS ( $T_c=25^\circ\text{C}$ )

Parameter	Symbol	Ratings	Unit
Storage Temperature	$T_{\text{stg}}$	-40 to +85	$^\circ\text{C}$
Operating Temperature	$T_{\text{op}}$	-5 to +75	$^\circ\text{C}$
Supply Voltage	$V_{\text{ss}}$	-6 to 0	V
PIN Reverse Voltage	$V_{\text{R}}$	0 to 20	V
PIN Reverse Current	$I_{\text{R(peak)}}$	4	mA


## OPTICAL &amp; ELECTRICAL CHARACTERISTICS

(T<sub>C</sub>=25°C, λ=1,550nm, V<sub>SS</sub>=-5.2V, V<sub>R</sub>=5V, unless otherwise specified)

Parameter	Symbol	Test Conditions	Limits			Unit	
			Min.	Typ.	Max.		
PIN Responsivity	R13	λ = 1,310nm	0.85	0.95	-	A/W	
	R15	λ = 1,550nm	0.85	1.00	-		
	R16	λ = 1,620nm	-	0.85	-		
AC Transimpedance	Z <sub>t</sub>	f = 750MHz, Single-end	900	1300	-	Ω	
Output Common Voltage	V <sub>out</sub>	-	-	-400	-	mV	
Maximum Output Voltage Swing	V <sub>clip</sub>	Saturated Output Voltage	400	600	800	mV	
Bandwidth	BW	-3dB from 750MHz, Pin=-16dBm	9.0	11.0	-	GHz	
Lower Cut-off Frequency	f <sub>cl</sub>		-	40	100	kHz	
Peaking	d <sub>pk</sub>	130MHz to BW, Pin=-16dBm	-	0.5	1.5	dB	
Group Delay Deviation	GD	1GHz to 6GHz, Pin=-16dBm	-	15	40	ps <sub>p-p</sub>	
		1GHz to 8GHz, Pin=-16dBm	-	30	60		
Output Return Loss	S <sub>22</sub>	130MHz to 6GHz	-	12	-	dB	
		130MHz to 8GHz	-	10	-		
Minimum Sensitivity	P <sub>r</sub>	10Gb/s, NRZ, PRBS=2 <sup>31</sup> -1, B.E.R.=10 <sup>-12</sup>	25°C, R <sub>ext</sub> =13dB	-	-19.0	-18.0	dBm
			25°C, R <sub>ext</sub> =8.2dB	-	-17.0	-	
			25°C, R <sub>ext</sub> =6.0dB	-	-14.0	-	
			70°C, R <sub>ext</sub> =13dB	-	-18.0	-17.0	
Maximum Overload	P <sub>o</sub>	10Gb/s, NRZ, PRBS=2 <sup>31</sup> -1, B.E.R.=10 <sup>-12</sup>	R <sub>ext</sub> =13dB	-0.5	0	-	dBm
			R <sub>ext</sub> =8.2dB	-	1	-	
			R <sub>ext</sub> =6.0dB	-	2	-	
Optical Return Loss	ORL	λ = 1,550nm	27	-	-	dB	
		λ = 1,310nm	27	-	-		
Preamp Supply Current	I <sub>SS</sub>	-	-	110	130	mA	
Preamp Supply Voltage	V <sub>SS</sub>	-	-5.46	-5.20	-4.94	V	
PIN Supply Voltage	V <sub>R</sub>	-	4.75	5.0	12	V	

Note: All the parameters are measured with 50Ω DC-coupled and 0V output offset.

Notes

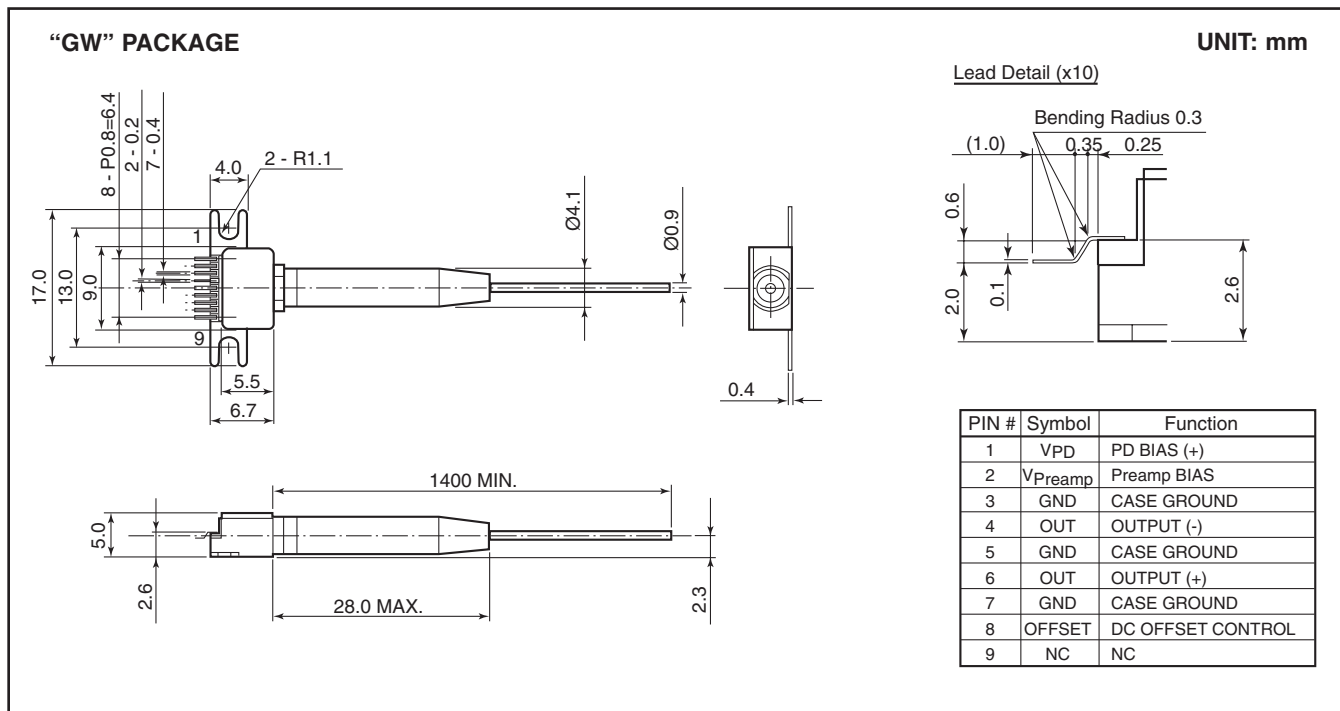

For further information please contact:

## FUJITSU COMPOUND SEMICONDUCTOR, INC.

2355 Zanker Rd.  
 San Jose, CA 95131-1138, U.S.A.  
 Phone: (408) 232-9500  
 FAX: (408) 428-9111  
[www.fcsi.fujitsu.com](http://www.fcsi.fujitsu.com)

## FUJITSU QUANTUM DEVICES EUROPE LTD.

Network House  
 Norreys Drive  
 Maidenhead, Berkshire SL6 4FJ  
 United Kingdom  
 TEL: +44 (0) 1628 504800  
 FAX: +44 (0) 1628 504888

## FUJITSU QUANTUM DEVICES SINGAPORE PTE LTD.

**Hong Kong Branch**  
 Rm. 1101, Ocean Centre, 5 Canton Rd. Tsim Sha Tsui,  
 Kowloon, Hong Kong  
 TEL: +852-23770226  
 FAX: +852-23763269

**CAUTION**

Fujitsu Compound Semiconductor Products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put this product into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

## FUJITSU QUANTUM DEVICES LIMITED

Business Development Division  
 11th Floor, Hachioji Daiichi-Seimei Bldg.  
 3-20-6 Myojin-cho  
 Hachioji-city, Tokyo 192-0046, Japan  
 TEL: +81-426-43-5885  
 FAX: +81-426-43-5582

Fujitsu Limited reserves the right to change products and specifications without notice. The information does not convey any license under rights of Fujitsu Limited or others.

© 2002 FUJITSU COMPOUND SEMICONDUCTOR, INC.  
 Printed in U.S.A. FCSI0302M200