

S3A THRU S3M

SURFACE MOUNT SILICON RECTIFIER

VOLTAGE: 50-1000V

CURRENT: 3.0A


FEATURES

- Ideal for surface mounted applications
- Low leakage current
- Glass passivated junction

MECHANICAL DATA

- **Case:** Molded plastic
- **Epoxy:** UL94V-0 rate flame retardant
- **Lead:** MIL-STD- 202E, Method 208 guaranteed
- **Polarity:** Color band denotes cathode end
- **Mounting position:** Any
- **Weight:** 0.24 grams

SMC (DO-214AB)

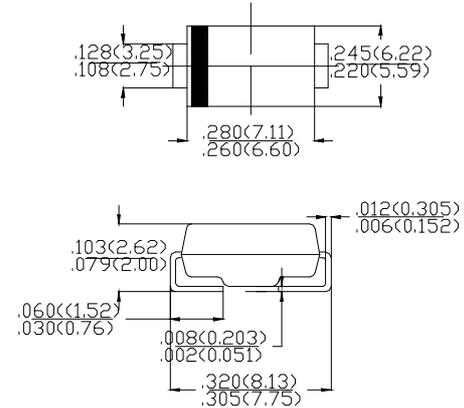

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| | SYMBOL | S3A | S3B | S3D | S3G | S3J | S3K | S3M | units |
|---|---------------------------|-------------|-----|-----|-----|-----|-----|------|--------------------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward rectified Current at $T_A=75^\circ\text{C}$ | I_o | 3.0 | | | | | | | A |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method) | I_{FSM} | 100 | | | | | | | A |
| Maximum forward Voltage at 3.0A DC | V_F | 1.2 | | | | | | | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage | @ $T_A=25^\circ\text{C}$ | 10.0 | | | | | | | μA |
| | @ $T_A=125^\circ\text{C}$ | 250 | | | | | | | |
| Typical Thermal Resistance (Note2) | $R_{\theta JL}$ | 10 | | | | | | | $^\circ\text{C/W}$ |
| Typical Junction Capacitance (Note1) | C_J | 60 | | | | | | | pF |
| Operation and Storage Temperature Range | T_{STG}, T_J | -65 to +175 | | | | | | | $^\circ\text{C}$ |

Notes: 1. Measured at 1MHz and applied reverse voltage of 4.0 volts
2. Thermal Resistance (Junction to Ambient), $.0.4 \times 0.4 \text{in}^2$ ($10 \times 10 \text{mm}^2$) copper pads to each terminal