

MOS DIGITAL INTEGRATED CIRCUIT

μ PD1701C-014

PHASE LOCKED LOOP FREQUENCY SYNTHESIZER FM-AM DIGITAL TUNING SYSTEM CONTROLLER CMOS LSI

The μ PD1701C-014 is a single chip CMOS controller designed for using as a Phase Locked Loop Frequency Synthesizer Digital Tuning System Controller.

The μ PD1701C-014 is packaged in a 28 Pin slim dual in-line package (DIP).

FEATURES

- PLL, swallow counter and system controller are realized in a single chip.
- FM and AM bands ——— Japan, U.S. and Europe bands.
- High reference frequency. (FM: 25 kHz, AM: 9/10 kHz)
It results in a high carrier to noise ratio.
- External programmable IF offset for FM band.
- High speed and low power consumption due to CMOS.
- Stand-by mode ——— Supply current $I_{DD} = 0.5$ mA (TYP.)
- Display brightness control (DIMMER) ——— Duty ratio 1 : 4
- Internal display decoder for 3.5 digit multiplexed display.
- Automatic power-on clear without any external components.

FUNCTION OF RADIO


- Automatic up search (SEEK)
- Automatic audition (SCAN)
- Manual up or down search
- Preset station memory call
- Preset station memory ——— FM: 6 stations, AM: 6 stations
- Last tuned station memory ——— FM: 1 station, AM: 1 station

FUNCTION OF CLOCK

- 12 hour display format ——— hours, minutes, AM/PM, colon
- Leading-zero blanking
- Hours and minutes set controls
- Minutes and seconds reset control

PACKAGE DIMENSIONS

in millimeters

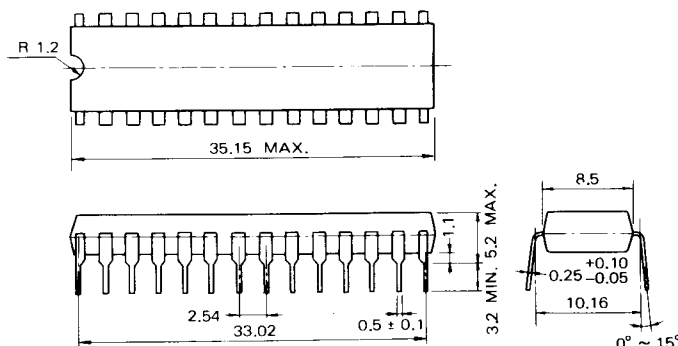

ABSOLUTE MAXIMUM RATINGS

Supply Voltage	V_{DD}	-0.3 to +6.0	V
Input Voltage	V_I	-0.3 to V_{DD}	V
Output Voltage	V_O	-0.3 to V_{DD}	V
Output Current	I_{OH}	-10	mA
Storage Temperature	T_{stg}	-55 to +125	°C
Operation Temperature	T_{opt}	-35 to +75	°C

ELECTRICAL CHARACTERISTICS ($T_a = -35$ to $+75$ °C, $V_{DD} = 4.5$ to 5.5 V)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
High Level Input Voltage	V_{IH1}	$0.8V_{DD}$		V_{DD}	V	SD terminal
	V_{IH2}	$0.7V_{DD}$		V_{DD}	V	CE terminal
	V_{IH3}	$0.6V_{DD}$		V_{DD}	V	K_0 to K_3 terminals
Low Level Input Voltage	V_{IL1}	0		$0.3V_{DD}$	V	CE terminal
	V_{IL2}	0		$0.2V_{DD}$	V	SD, K_0 to K_3 terminals
High Level Output Voltage	V_{OH1}	4.0			V	EO, D, MUTE: $I_{OH} = -0.5$ mA
	V_{OH2}	4.0			V	SEG: $I_{OH} = -1.0$ mA
	V_{OH3}	4.0			V	PSC: $I_{OH} = -0.2$ mA
Low Level Output Voltage	V_{OL1}			0.5	V	EO: $I_{OL} = 0.5$ mA
	V_{OL2}			0.5	V	D, SEG, MUTE, PSC: $I_{OL} = 0.2$ mA
High Level Input Current	I_{IH}	5.0	25	100	μ A	K: $V_I = V_{DD} = 5.0$ V
Frequency Response	f_{in1}	0.5		2.5	MHz	AM: $v_i = 1.0$ Vp-p, DC cut sine wave
	f_{in2}	0.5		8.8	MHz	FM: $v_i = 0.8$ Vp-p, DC cut square wave
Supply Voltage Rise Time	t_r			0.5	s	V_{DD} : 0 \rightarrow 4.5 V
Supply Current	I_{DD}		0.5	2.0	mA	CE: Low Level

SYSTEM DESCRIPTION

NEC's Digital Tuning System provides full electronic control of a vari-cap tuned FM/AM radio receiver and stereo. The block diagram of the system is shown in Fig. 1. This is a Phase Locked Loop Digital Tuning System which consists of two integrated circuits; controller plus PLL in a single chip, and two-modulus prescaler.

The controller chip (μ PD1701C-014) provides Phase Locked Loop capability with on-chip frequency division, a reference oscillator whose frequency is controlled by an external crystal of 4.5 MHz, and phase comparator circuitry. It accepts directly an AM local oscillator signal and an FM signal from two-modulus prescaler (μ PB553AC), and outputs control signals for closed loop operation of these oscillators. The outputs drives filters for supplying analog voltages to the vari-cap tuners. The controller also provides the signals to drive the display. The frequency of the tuned station is displayed on a 3.5 digit multiplexed display. Six favorite stations on each band can be stored as well as "last stations tuned" information.

The two-modulus prescaler (μ PB553AC) is suitable for pulse swallowing in this system.


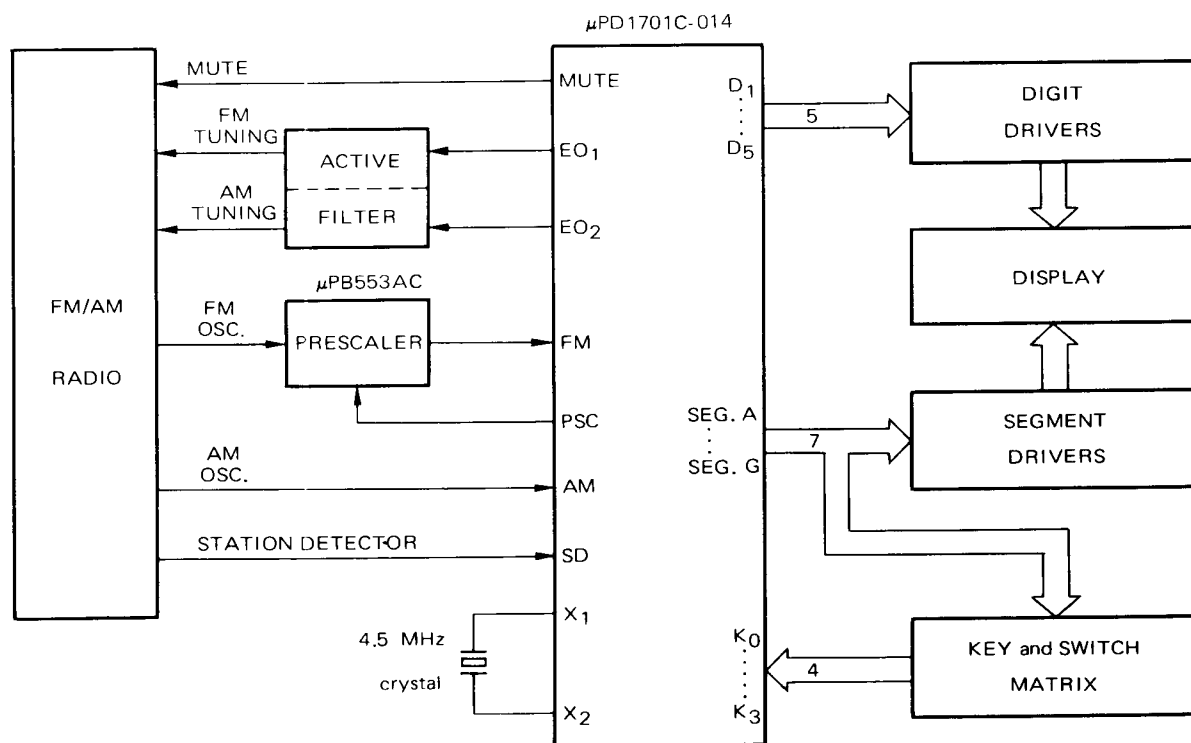


Fig. 1 Block Diagram

PIN CONNECTION (Top View)

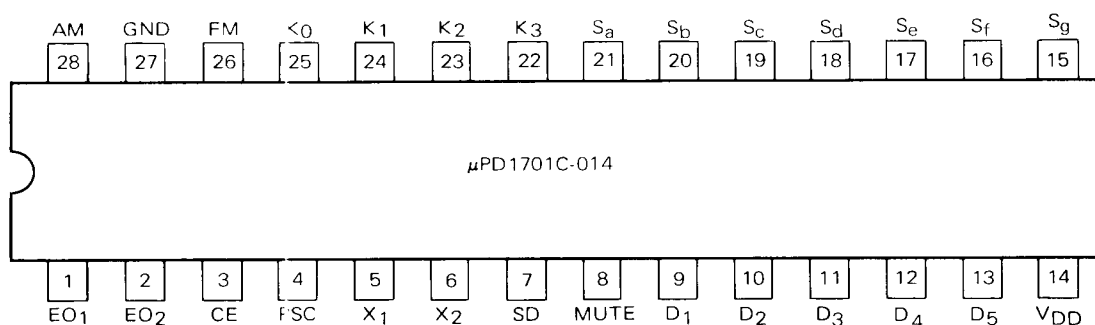

EXPLANATION OF INPUT AND OUTPUT TERMINALS

EO ₁ EO ₂	These three-state outputs are used (via active filters) to supply analog voltages to the tuner varicap for controlling the local oscillators.
CE	This input is used to designate the stand-by mode to the chip. It is low to designate the stand-by mode. (display: off, PLL: disable)
PSC	This output is used to control the division ratio of the FM two-modulus prescaler (μ PB553AC).
X ₁ , X ₂	These inputs are for connection to a 4.5 MHz crystal.
SD	This input is used to control the automatic station searching operation. It is high to indicate the presence of a station.
MUTE	This output line is high to mute the radio in the case of station change, band change, and so on.
D ₁ to D ₅	These outputs are used as digit drivers for the display. (Active high)
V _{DD}	This is a 4.5 to 5.5 volt supply for the chip.
S _a to S _g	These outputs are used as segment drivers for the display. They are also used as vertical drive for the control key and mode switch matrix. (Active high)
K ₀ to K ₃	These inputs are from seven by four matrix. Various functions are entered through the matrix. See Fig. 2 for the matrix assignments.
FM	This is the FM band local oscillator input. The frequency is divided by 16/17 using a two-modulus prescaler (μ PB553AC).
GND	System ground.
AM	This is the AM band local oscillator input.

CONTROL KEY AND MODE SWITCH MATRIX

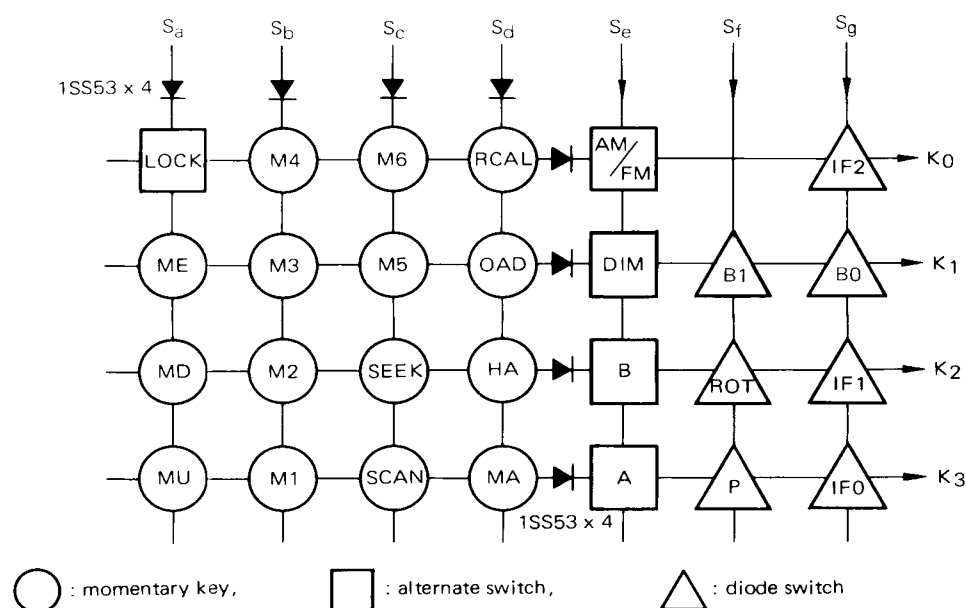


Fig. 2 Control Key and Mode Switch Matrix

* Manual up or down search

MU, MD A momentary depression will tune to next channel, and continuous depression more than 0.5 second allows traversing up or down the entire band until the key is released.

* Automatic up search (Saw-tooth search)

SEEK A momentary depression causes automatic up search which is terminated by activation of SD terminal (active high).

SCAN A momentary depression causes automatic station-to-station search.

* Preset of the station

ME The tuning information is stored into the internal RAM by depressing ME key and then the desired memory key (M1 to M6) within 5 seconds from the time ME key was initially depressed. If any other key is depressed in this period, the ME function is cancelled.

M1 to M6 Six favorite stations can be recalled from internal RAM for each band. When it is switched from one band to the other, it will tune to "last-tuned-to station" on that band. Each time a station is changed, the controller provides a signal to mute the radio.

* Clock set controls

HA, MA These keys are used for hours and minutes setting. (See note)

OAD A momentary depression will reset minutes and seconds.

Note MU and MD keys can be used to set minutes and hours, keeping depressing ME key when time is displayed.

* **Switching-over the display between radio and clock**

A, B, P Display mode switches A, B initial switch P and control key RCAL control the display mode as follows.
RCAL

1. A: ON, B: ON, P: ANY

No priority on the display. A momentary depression of RCAL key causes alternate display change between time and frequency whenever it is performed. Whenever frequency is handled, frequency is displayed.

2. A: ON, B: OFF, P: OFF

Clock display is prior to frequency. A momentary depression of RCAL key causes alternative display change. When time is displayed, a depression of RCAL or one of the frequency handling key recalls frequency information on the display for 5 seconds. After that, the display turns back to clock automatically.

3. A: ON, B: OFF, P: ON

Frequency is prior to the clock. A momentary depression of RCAL key causes the alternative display change. When frequency is displayed, a momentary depression of RCAL key recalls clock display and it remains there for 5 seconds. If any other key is handled when time is displayed, handling of one of the time adjust keys (HA, MA, OAD) keeps the time display, the display turns back to frequency automatically 5 seconds after the time adjust is completed. Whenever frequency is handled, frequency is displayed.

4. A: OFF, B: OFF, P: ANY

Clock only.

5. A: OFF, B: ON, P: ANY

Disabled.

* **Switching-over the Manual UP/DOWN signal generator**

ROT ON: Pulse repetition rate more than 6 milisecond will be acceptable as MU or MD signal for an application of the endless-rotary switch as the signal generator.

OFF: Pulse repetition rate more than 60 milisecond will be acceptable preventing from miscounting by chattering of the momentary switches applied for UP/DOWN signal generator.

* **Protection from the miss key input**

LOCK This switch is for protection from miss key input.

ONAll of the key input is disabled.

OFFAll of the key input is enabled.

* **Protection from the key chattering**

Key make timeless than 15 ms

Key break timeless than 15 ms

*** Selection of the radio band**

B0, B1 These switches are for selection of the district.

AM/FM This switch is for selection of the radio band.

Band Switch			Selected Band	Receiving Frequency	Channel Spacing	Reference Frequency
B0	B1	AM/FM				
on	X	on	AM Japan	531 to 1 602 kHz	9 kHz	9 kHz
		off	FM Japan	76.1 to 89.9 MHz	100 kHz	25 kHz
off	on	on	AM Europe	531 to 1 602 kHz	9 kHz	9 kHz
		off	FM Europe	87.9 to 107.9 MHz	100 kHz	25 kHz
off	on	on	AM U.S. *3	531 to 1 602 kHz	9 kHz	9 kHz
		off	FM U.S.	87.9 to 107.9 MHz	100 kHz	25 kHz
	off	on	AM U.S. *3	530 to 1 620 kHz	10 kHz	10 kHz
		off	FM U.S.	87.9 to 107.9 MHz	100 kHz	25 kHz

*3: See AM band IF offset

*** FM band IF offset**

IF0, IF1 These switches program the chip to accept 4 different intermediate frequencies.

IF0	IF1	Intermediate Frequency		
		Japan Band	Europe Band	U.S. Band
on	off	10.750 MHz	10.650 MHz	10.650 MHz
on	on	10.725 MHz	10.675 MHz	10.675 MHz
off	off	10.700 MHz	10.700 MHz	10.700 MHz
off	on	10.675 MHz	10.725 MHz	10.725 MHz

* AM band IF offset

IF2 This switch programs the chip to accept 2 different intermediate frequencies.

B1 This switch is for selection of the receiving band and channel spacing of AM radio for U.S. band.

B0	B1	IF2	Intermediate Frequency	Receiving Frequency	Channel Spacing
off	on	on	261 kHz	531 to 1 602 kHz	9 kHz
		off	450 kHz		
	off	on	260 kHz	530 to 1 620 kHz	10 kHz
		off	450 kHz		

* Display interface

The center frequency of tuned station is displayed on a 3.5 digit LED display. The segment outputs a, b, c, d, e, f, and g are also used as inputs for 7 segment drivers. The segment outputs go to common collector NPN transistor array (μ PA56C) to drive the segments of the common cathode 7 segment LED display. The digit outputs go to NPN darlington transistor array (μ PA53C) to drive the LED display.


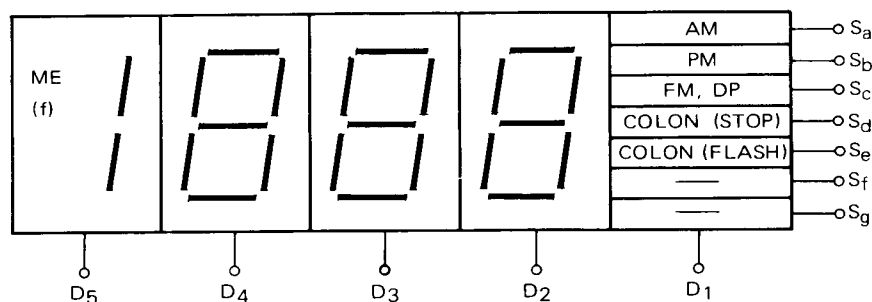


Fig. 4

* Display format

○ Segment Pattern



* Display brightness control (DIMMER)

DIM This switch is for selection of display brightness.

ON — — — Display brightness is reduced. (Duty factor: 1/32)

OFF — — — Display brightness is ordinary. (Duty factor: 1/8)

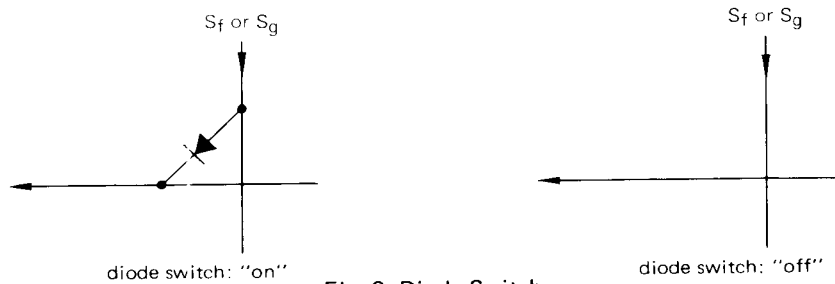


Fig. 3 Diode Switch

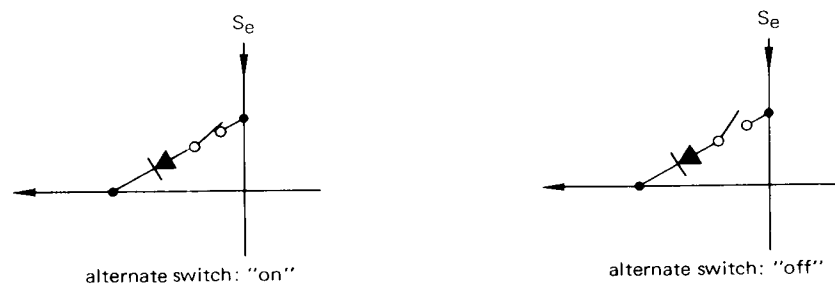


Fig. 4 Alternate Switch

NEC Building, 33-1, Shiba Gochome, Minato-ku, Tokyo 108, Japan
Tel: Tokyo 454-1111
Telex Address: NECTOK J22686

013702 ~~X~~ ~~X~~