



HSC4242

NPN EPITAXIAL PLANAR TRANSISTOR

Description

The HSC4242 is designed for triple diffused planar type and high speed switching applications.

Absolute Maximum Ratings (Ta=25°C)

- Maximum Temperatures
Storage Temperature -50 ~ +150 °C
Junction Temperature +150 °C Maximum
- Maximum Power Dissipation
Total Power Dissipation (Tc=25°C) 40 W
- Maximum Voltages and Currents
BVCBO Collector to Base Voltage 450 V
BVCEO Collector to Emitter Voltage 400 V
BVEBO Emitter to Base Voltage 10 V
IC Collector Current 7 A
IB Base Current 2 A

Characteristics (Ta=25°C)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BVCBO	450	-	-	V	IC=1mA, IE=0
BVCEO	400	-	-	V	IC=100mA, IB=0
BVEBO	10	-	-	V	IE=1mA, IC=0
ICBO	-	-	100	uA	VCB=450V, IE=0
IEBO	-	-	100	uA	VEB=10V, IC=0
*VCE(sat)	-	-	0.8	V	IC=4A, IB=0.8A
*VBE(sat)	-	-	1.2	V	IC=4A, IB=0.8A
*hFE1	15	-	55		IC=0.8A, VCE=5V
*hFE2	10	-	-		IC=2A, VCE=5V
*hFE3	10	-	-		IC=4A, VCE=5V






*Pulse Test : Pulse Width ≤380us, Duty Cycle≤2%

Classification Of hFE1

Rank	A	B1	B2	B3	B4
Range	15-28	22-35	29-42	36-49	43-55




Characteristics Curve

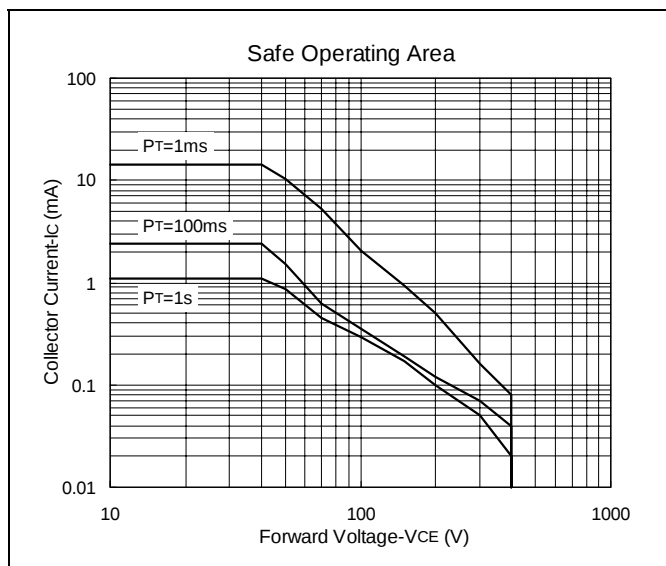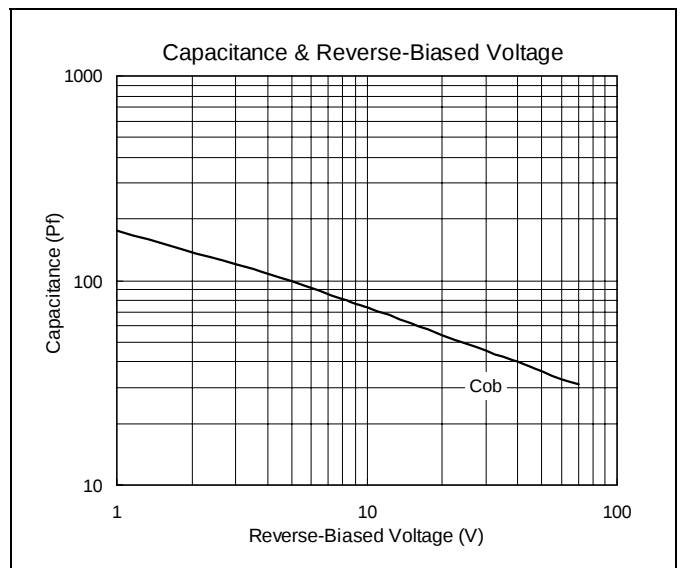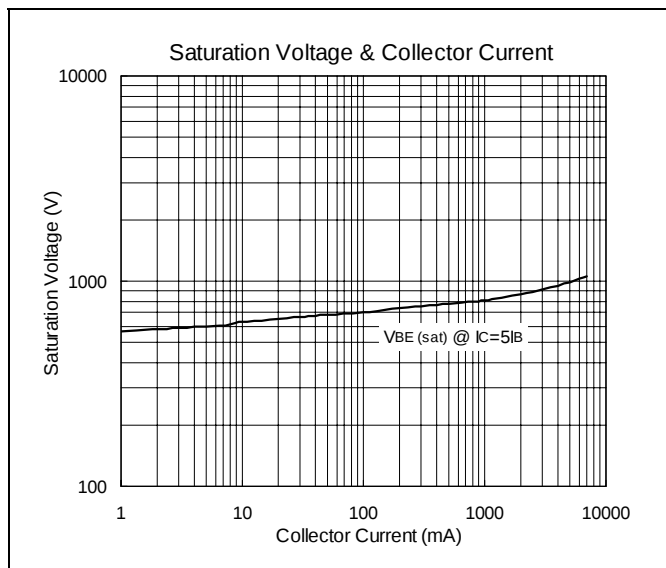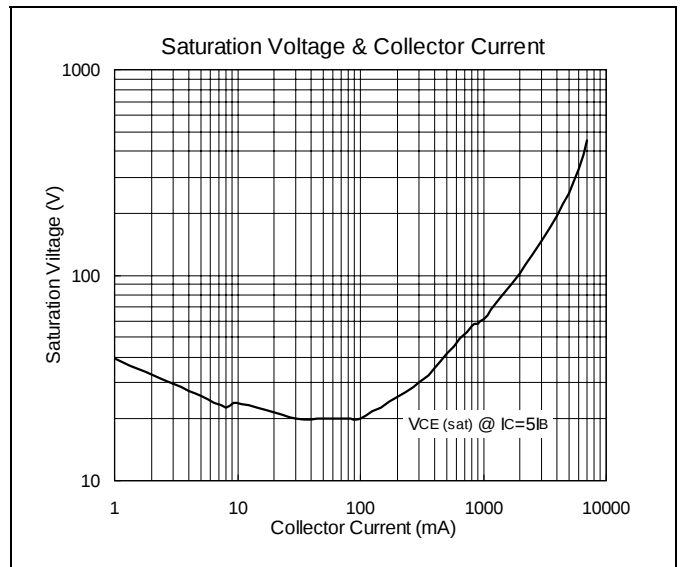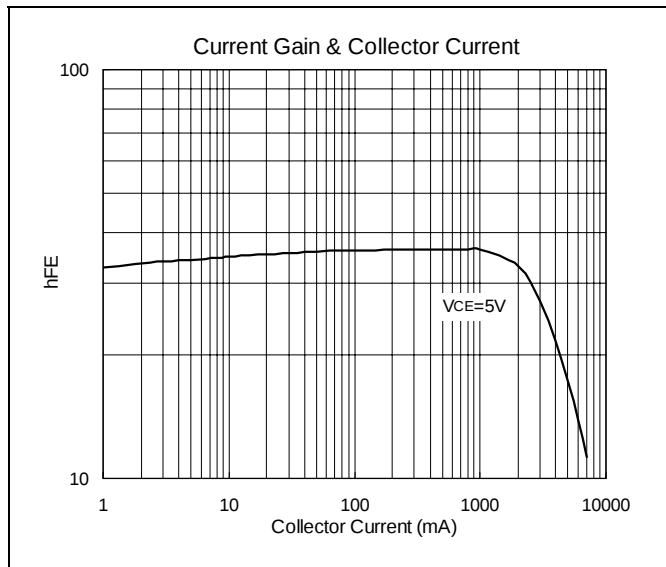




TO-220AB Dimension

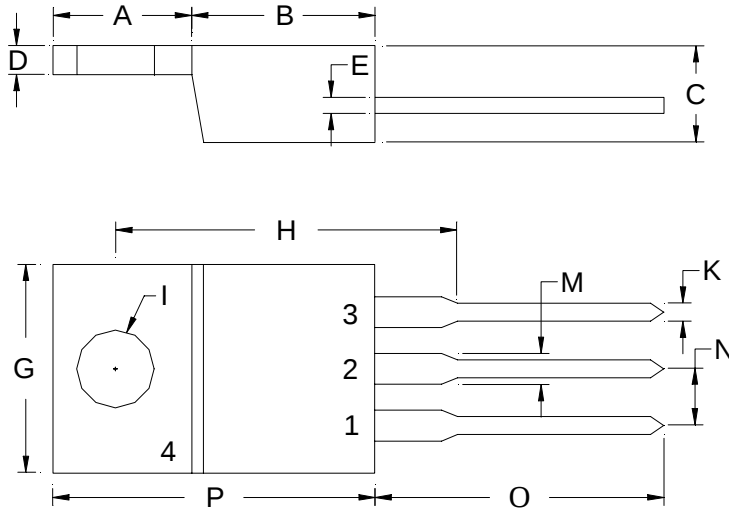

Marking :

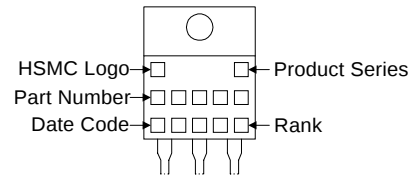

Style : Pin 1.Base 2.Collector 3.Emitter

3-Lead TO-220AB Plastic Package
HSMC Package Code : E

*:Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.2197	0.2949	5.58	7.49	I	-	*0.1508	-	*3.83
B	0.3299	0.3504	8.38	8.90	K	0.0295	0.0374	0.75	0.95
C	0.1732	0.185	4.40	4.70	M	0.0449	0.0551	1.14	1.40
D	0.0453	0.0547	1.15	1.39	N	-	*0.1000	-	*2.54
E	0.0138	0.0236	0.35	0.60	O	0.5000	0.5618	12.70	14.27
G	0.3803	0.4047	9.66	10.28	P	0.5701	0.6248	14.48	15.87
H	-	*0.6398	-	*16.25					

Notes : 1.Dimension and tolerance based on our Spec. dated Sep. 07,1997.

2.Controlling dimension : millimeters.

3.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.

4.If there is any question with packing specification or packing method, please contact your local HSMC sales office.

Material :

- Lead : 42 Alloy ; solder plating
- Mold Compound : Epoxy resin family, flammability solid burning class:UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of HSMC.
- HSMC reserves the right to make changes to its products without notice.
- **HSMC semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- HSMC assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory :

- **Head Office** (Hi-Sincerity Microelectronics Corp.) : 10F.,No. 61, Sec. 2, Chung-Shan N. Rd. Taipei Taiwan R.O.C.
Tel : 886-2-25212056 Fax : 886-2-25632712, 25368454
- **Factory 1** : No. 38, Kuang Fu S. Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C
Tel : 886-3-5983621~5 Fax : 886-3-5982931
- **Factory 2** : No. 17-1, Ta-Tung Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C
Tel : 886-3-5977061 Fax : 886-3-5979220