

Multichannel detector head controller



C7557-01

For control of multichannel detector head and data acquisition

The C7557-01 is specifically designed for basic control in multichannel photometry. When connected to a HAMAMATSU multichannel detector head and a personal computer, the C7557-01 allows easy control of the detector head and data acquisition by using dedicated software that comes with the unit.

The C7557-01 supports all models of HAMAMATSU multichannel detector heads designed to use a CCD/NMOS/InGaAs image sensor. The C7557-01 provides various useful functions (see page 2) that efficiently collect sample data during basic operation.

The C7557-01 controller includes a driver/amplifier circuit for operating a multichannel detector head, a power supply circuit, a temperature stabilizer circuit, an A/D conversion circuit that converts analog signals from the detector head into digital signals, and a data interface.

The software supplied with the C7557-01 allows easy control of the multichannel detector head and data acquisition through the USB interface. This software runs on Windows 2000/XP/Vista, by simple operation from the menu neatly displayed on the screen. This software is available with different kinds of DLL *1 to help you develop your own software programs.


Features

- ➔ Easy to control multichannel detector head and data acquisition
- ➔ Supports all models of HAMAMATSU multichannel detector heads (CCD, NMOS, InGaAs)
- ➔ Software with different kind of DLL is supplied with the C7557-01
- ➔ Compact configuration

Applications

- ➔ Control of multichannel detector head and data acquisition

Connections to multichannel detector head and PC

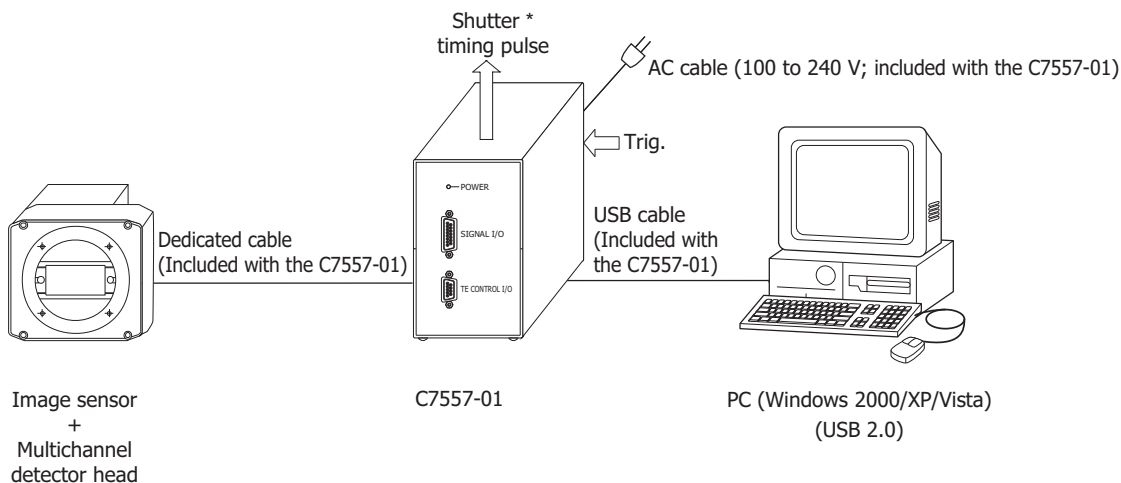

* Shutter, etc. are not available.

KACCC0402EA

*1: DLL is one of useful functions the Windows. It is a library that can freely start up from application software or execute function procedure. Software development can be made easier with DLL. To use DLL, see the operation manual that comes with the unit. The development environment should be Microsoft® Visual C++® *2 6.0 or later.

*2: Microsoft and Visual C++ are either registered trademarks or trademarks of Microsoft Corporation in the United States and other countries.

Precaution for use

When operating the NMOS multichannel detector head, always be sure to attach the MOS adapter (supplied with the C7557-01) to the C7557-01 main unit. If the the NMOS multichannel detector head is connected and the power is turned on without attaching the adapter, the power supply in the C7557-01 main unit may be damaged.

Functions

Parameter	Specification
Data transfer	Transfers data stored in memory to computer.
Exposure time setting	1 ms to 65535 ms (1 ms steps) Minimum exposure time depends on sensor detection level.
External sync signal input	BNC connector input
Trigger mode	Internal sync, external sync
Trigger polarity	Trigger polarity selectable for external sync
Shutter timing pulse output	Outputs timing signal for operating external shutter or external light source via BNC connector. Pulse width, delay and polarity settings are possible.
Video signal output	Outputs video signal sent from head, via BNC connector
Video sync signal output	Outputs sync signal used to observe video signal output with external device such as oscilloscope, via BNC connector
Amplifier gain	1/2, 1, 2, 5, 10, 20, 50, 100 *2
Image sensor and detector head combination	Compatible with each multichannel detector head Refer to "Selection guide for image sensor and detector head combination"
Detector cooling control	Cooling start and stop
Detector cooling temperature readout	Converts analog temperature data from detector into digital signal, and transfers it to computer. (10 bit A/D conversion)

*2: Depending on the drive conditions, normal output may not be obtained if the amplifier gain is set too high. In this case, lower the amplifier gain.

Specifications

■ A/D converter

Parameter	CCD area image sensor	NMOS linear image sensor	InGaAs linear image sensor	
	A/D converter	16 bits	16 bits	12 bits
Conversion speed	4 μs/ch	24 μs/ch	2 μs/ch	8 μs/ch
Input range	0 to 10 V	0 to 10 V	-10 to +10 V	
Input method	Differential input			
Nonlinear linearity	0.1 %FS			
A/D conversion signal	External input			

■ Controller

Parameter	Specification
Clock	20 MHz
Memory	4 MB (1024 ch × 2048 lines)
Interface	USB

■ Equipment

Parameter	Specification
Interface	SCSI: 50-pin half pitch connector
Power supply	AC100 to 240 V ± 10 %, 50 to 60 Hz
Power consumption	50 V · A Typ.
Dimension	92 (W) × 150 (H) × 226 (D) mm
Operating temperature	0 to 40 °C
Storage temperature	-10 to 50 °C
Weight	Approx. 2.5 kg


■ Software

Parameter	Specification
Compatible OS	Windows2000/XP/Vista

- Prepare a BNC cable in the following cases:
 - Measurements by external sync
 - Controlling an external shutter or external light source
 - Measuring the video signal

■ Operation method

1. Make connections as indicated in ① to ⑤.
 - ① LINE Connect to the power cable.
 - ② USB Connect to a computer through the USB cable.
 - ③ TE CONTROL I/O Connect to the "TE CONTROL I/O" terminal on the detector head.
 - ④ SIGNAL I/O Connect to the "I/O SIGNAL" terminal on the detector head.
 - ⑤ GND When a 2-pin AC plug is used with the power cable, use this GND connector to ground the unit.
2. When all the connections are complete, turn on the power to the C7557-01.
3. Install the MCD USB driver and software. (For details on the MCD USB driver and software, refer to the operation manual supplied in the package.)

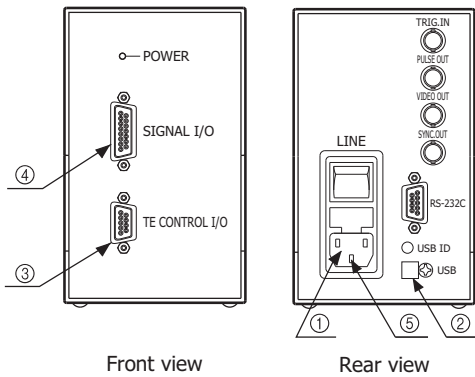

KACCCD403EA


Software functions

The figure below shows the main screen (CCD image sensor: line binning) while running on Windows 2000/XP/Vista.

From the main screen menu, you can easily set operating conditions for the multichannel detector head and data acquisition parameters. The measurement screen displayed with this software shows the image sensor channel along the horizontal axis and the output count along the vertical axis. The main screen menu also allows you to select the desired operation mode: line binning or area scanning (for CCD image sensors, NMOS linear image sensors), line binning (for NMOS linear image sensors) or line scanning (for InGaAs linear image sensors).

The parameters that can be set on the main screen are as follows:

- Exposure time
- Amplifier gain
- Cooling control
- Number of integrations
- Dark correction
- Type of measurement data
- Start or end of measurement
- Detector head status
- Trigger mode
- Trigger polarity
- Shutter timing pulse width
- Shutter timing pulse delay
- Shutter timing pulse polarity

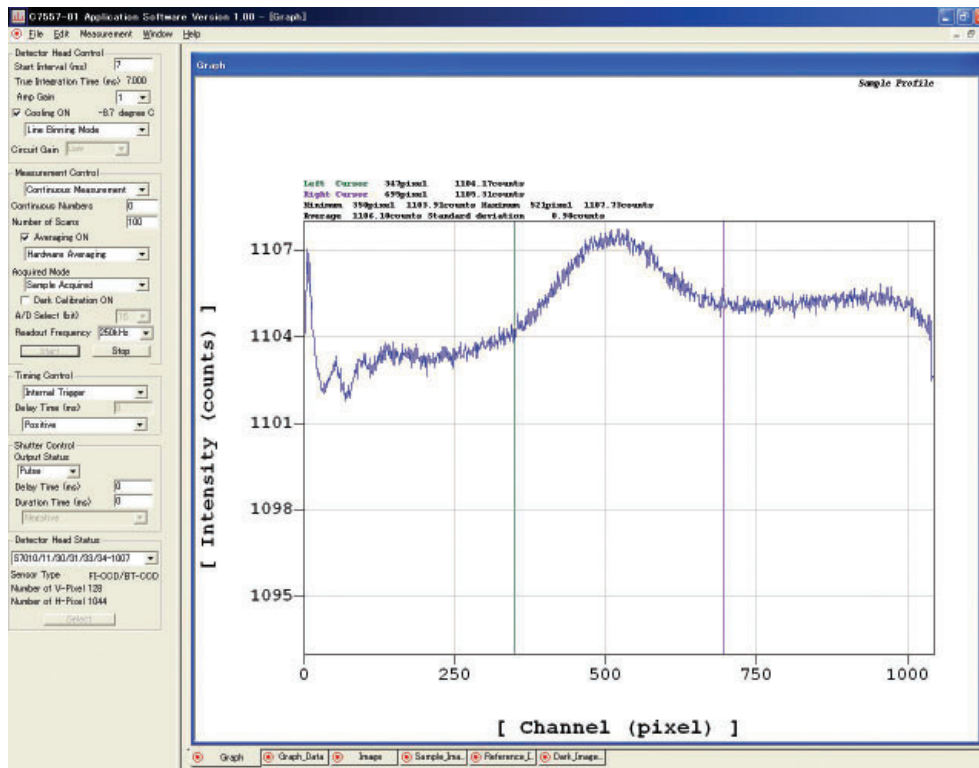

▣ Selection guide for image sensor and detector head combination (1)

Suitable multichannel detector head	Image sensor			Types of sensor	
Type No.	Type No.	Number of active pixel	Active area [mm (H) × mm (V)]		
C7020	S9970-0906	512 × 60	12.288 × 1.440	Front-illuminated CCD area image sensor	
	S9970-1006	1024 × 60	24.576 × 1.440		
	S9970-1007	1024 × 124	24.576 × 2.976		
	S9970-1008	1024 × 252	24.576 × 6.048		
C7020-02	S9972-1007	1024 × 124	24.576 × 2.976		
	S9972-1008	1024 × 252	24.576 × 6.048		
C7021	S9971-0906	512 × 60	12.288 × 1.440		
	S9971-1006	1024 × 60	24.576 × 1.440		
	S9971-1007	1024 × 124	24.576 × 2.976		
C7021-02	S9973-1007	1024 × 124	24.576 × 2.976		
C7025	S9971-1008	1024 × 252	24.576 × 6.048		
C7025-02	S9973-1008	1024 × 252	24.576 × 6.048		
C7040	S7030-0906	512 × 58	12.288 × 1.392		Back-thinned *3 CCD area image sensor
	S7030-0907	512 × 122	12.288 × 2.928		
	S7030-0908	512 × 250	12.288 × 6.000		
	S7030-1006	1024 × 58	24.576 × 1.392		
	S7030-1007	1024 × 122	24.576 × 2.928		
	S7030-1008	1024 × 250	24.576 × 6.000		
C7041	S7031-0906	512 × 58	12.288 × 1.392		
	S7031-0907	512 × 122	12.288 × 2.928		
	S7031-0908	512 × 250	12.288 × 6.000		
	S7031-1006	1024 × 58	24.576 × 1.392		
	S7031-1007	1024 × 122	24.576 × 2.928		
	S7031-1008	1024 × 250	24.576 × 6.000		
C7043	S7033-0907	512 × 122	12.288 × 2.928		
	S7033-1007	1024 × 122	24.576 × 2.928		
C7044	S7034-0907	512 × 122	12.288 × 2.928		
	S7034-1007	1024 × 122	24.576 × 2.928		
C7180	S7170-0909	512 × 512	12.288 × 12.288		
C7181	S7171-0909	512 × 512	12.288 × 12.288		
C10150	S10140-1007	1024 × 122	12.288 × 1.464		
	S10140-1008	1024 × 250	12.288 × 3.000		
	S10140-1009	1024 × 506	12.288 × 6.072		
	S10140-1107	2048 × 122	24.576 × 1.464		
	S10140-1108	2048 × 250	24.576 × 3.000		
	S10140-1109	2048 × 506	24.576 × 6.072		
C10151	S10141-1007	1024 × 122	12.288 × 1.464		
	S10141-1008	1024 × 250	12.288 × 3.000		
	S10141-1009	1024 × 506	12.288 × 6.072		
	S10141-1107	2048 × 122	24.576 × 1.464		
	S10141-1108	2048 × 250	24.576 × 3.000		
	S10141-1109	2048 × 506	24.576 × 6.072		
C8061-01	G9201-256S	256	12.8 × 0.25	InGaAs linear image sensor	
	G9202-512S	512	12.8 × 0.25		
	G9203-256S	256	12.8 × 0.50		
	G9204-512S	512	12.8 × 0.50		
	G9211-256S	256	12.8 × 0.25		
	G9212-512S	512	12.8 × 0.25		
	G9213-256S	256	12.8 × 0.50		
	G9214-512S	512	12.8 × 0.50		
C8062-01	G9205-256W	256	12.8 × 0.25		
	G9206-256W	256	12.8 × 0.25		
	G9207-256W	256	12.8 × 0.25		
	G9208-256W	256	12.8 × 0.25		


*3: The C7557-01 can be used with following back-thinned CCD area image sensors and multichannel detector heads.

- Two-stage TE-cooled CCD S7032-1006/-1007/-1008/multichannel detector head C7042
- Two-stage TE-cooled CCD S7035 series/multichannel detector head C7045

▣ Selection guide for image sensor and detector head combination (2)

Suitable multichannel detector head	Image sensor			Types of sensor
Type No.	Type No.	Number of active pixel	Active area [mm (H) × mm (V)]	
C5964-0800	S5930-256S	256	12.8 × 2.5	NMOS linear image sensor
C5964-0900	S5930-512S	512	25.6 × 2.5	
C5964-0910	S5931-512S	512	12.8 × 2.5	
C5964-1010	S5931-1024S	1024	25.6 × 2.5	
C5964-0801	S8382-256S	256	12.8 × 2.5	
C5964-0901	S8382-512S	512	25.6 × 2.5	
C5964-0911	S8383-512S	512	12.8 × 2.5	
C5964-1011	S8383-1024S	1024	25.6 × 2.5	
C8892	S3901-128Q	128	6.4 × 2.5	
	S3901-256Q	256	12.8 × 2.5	
	S3901-512Q	512	25.6 × 2.5	
	S3904-256Q	256	6.4 × 2.5	
	S3904-512Q	512	12.8 × 2.5	
	S3904-1024Q	1024	25.6 × 2.5	
	S8380-128Q	128	6.4 × 2.5	
	S8380-256Q	256	12.8 × 2.5	
	S8380-512Q	512	25.6 × 2.5	
	S8381-256Q	256	6.4 × 2.5	
S8381-512Q	512	12.8 × 2.5		
S8381-1024Q	1024	25.6 × 2.5		

▣ Dimensional outline (unit: mm)

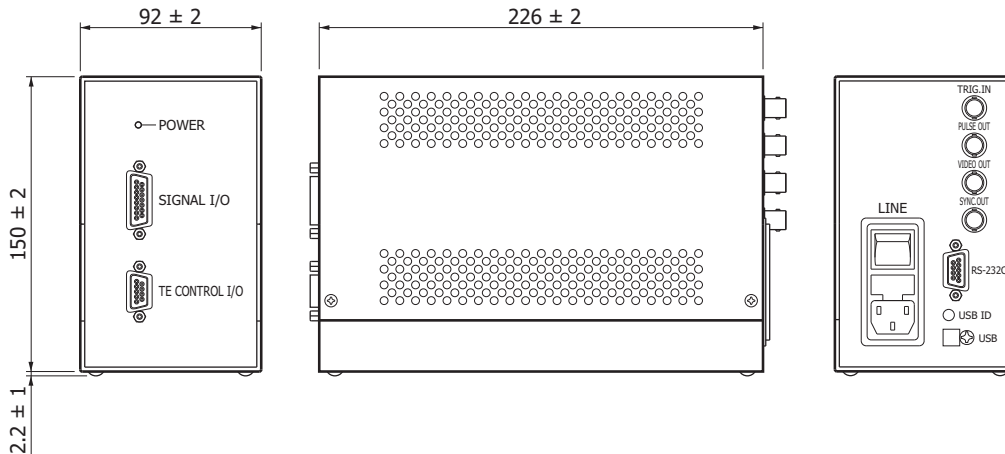


KACCA0237EA

Accessories

· Spare fuse (2.5 A) *4	1
· AC cable	1
· 2 to 3 conversion adapter	1
· USB cable	1
· Detector head connection cables (for "SIGNAL I/O" and "TE CONTROL I/O" terminal of multichannel detector head)	2
· CD-R (MCD USB driver, Software, Operation manual)	1
· MOS adapter *5	1

*4: Contained in the holder just above the AC cable connector on the C7557-01 rear panel.

*5: When operating the NMOS multichannel detector head, always be sure to attach the MOS adapter (supplied) to the C7557-01 main unit. If the the NMOS multichannel detector head is connected and the power is turned on without attaching the adapter, the power supply in the C7557-01 main unit may be damaged.

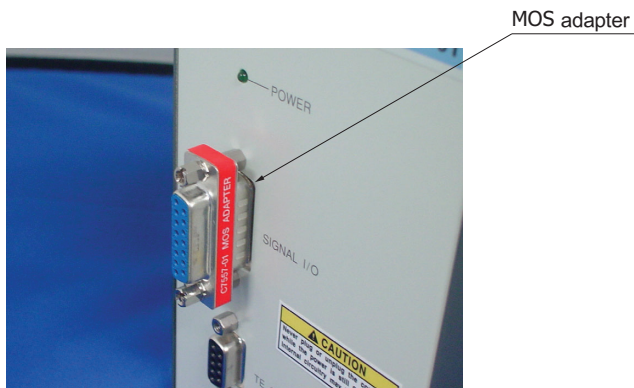

MOS adapter mounting example

Information described in this material is current as of February, 2011. Product specifications are subject to change without prior notice due to improvements or other reasons. Before assembly into final products, please contact us for the delivery specification sheet to check the latest information.

Type numbers of products listed in the delivery specification sheets or supplied as samples may have a suffix "(X)" which means preliminary specifications or a suffix "(Z)" which means developmental specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use.

Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1 int. 6, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741