

## 2-Channel AF Power Amp

## TENTATIVE

Case Outline : 15 pins (See attached case outline drawing.)

Function : 2-channel / 1-pack AF power amp

Use : Video projectors

Absolute Maximum Ratings at  $T_a = 25^\circ\text{C}$ 


			unit
Supply Voltage	V <sub>CC</sub>	$\pm 30$	V
Operating Case Temperature	T <sub>C</sub>	105	$^\circ\text{C}$
Storage Temperature	T <sub>Stg</sub>	-30 to +105	$^\circ\text{C}$
Available Time for Load Shorted	t	2	sec
	$V_{CC} = \pm 20.5\text{V}, R_L = 8\Omega,$ $f = 50\text{Hz}, P_o = 18\text{W}$		
Thermal Resistance	$\theta_{j-c}$	Total	1.0 $^\circ\text{C/W}$

Operating Characteristics at  $T_a = 25^\circ\text{C}, R_g = 50\Omega$ , See attached Test Circuit.

			min	typ	max	unit
Output Noise Voltage	V <sub>NO</sub>	$V_{CC} = \pm 24\text{V}$				0.2 mVrms
Quiescent Current	I <sub>QCO</sub>	$V_{CC} = \pm 24\text{V}$	15	25	25	mA
Midpoint Voltage	V <sub>N</sub>	$V_{CC} = \pm 24\text{V}$	-50	0	+50	mV
Output Delay Time	t <sub>D</sub>	$V_{CC} = \pm 20.5\text{V}, f = 15.75\text{kHz}$ triangular wave input $V_{P-P} = 1.5\text{V}$				1 $\mu\text{sec}$

## Remarks

- For power supply at the time of test, use a constant-voltage power supply unless otherwise specified.
- For measurement of the available time for load shorted and output noise voltage, use the specified transformer power supply shown below.
- The output noise voltage is represented by the peak value on rms scale (VTVM) of average value indicating type.

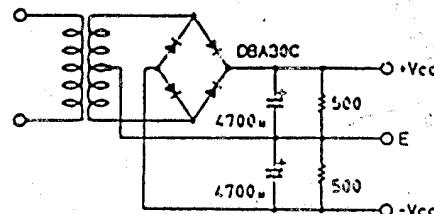
Specified transformer power supply  
(equivalent to RP-25)

The application circuit diagrams and circuit constants herein are included as an example and provide no guarantees for designing equipment to be mass-produced. The information herein is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use.


Specifications and information herein are subject to change without notice.

SANYO Electric Co.,Ltd. Semiconductor Overseas Marketing Div.  
Natsume Bldg., 18-6, 2-chome, Yushima, Bunkyo-ku, TOKYO 113 JAPAN.

# Internal Equivalent Circuit (STK4273)

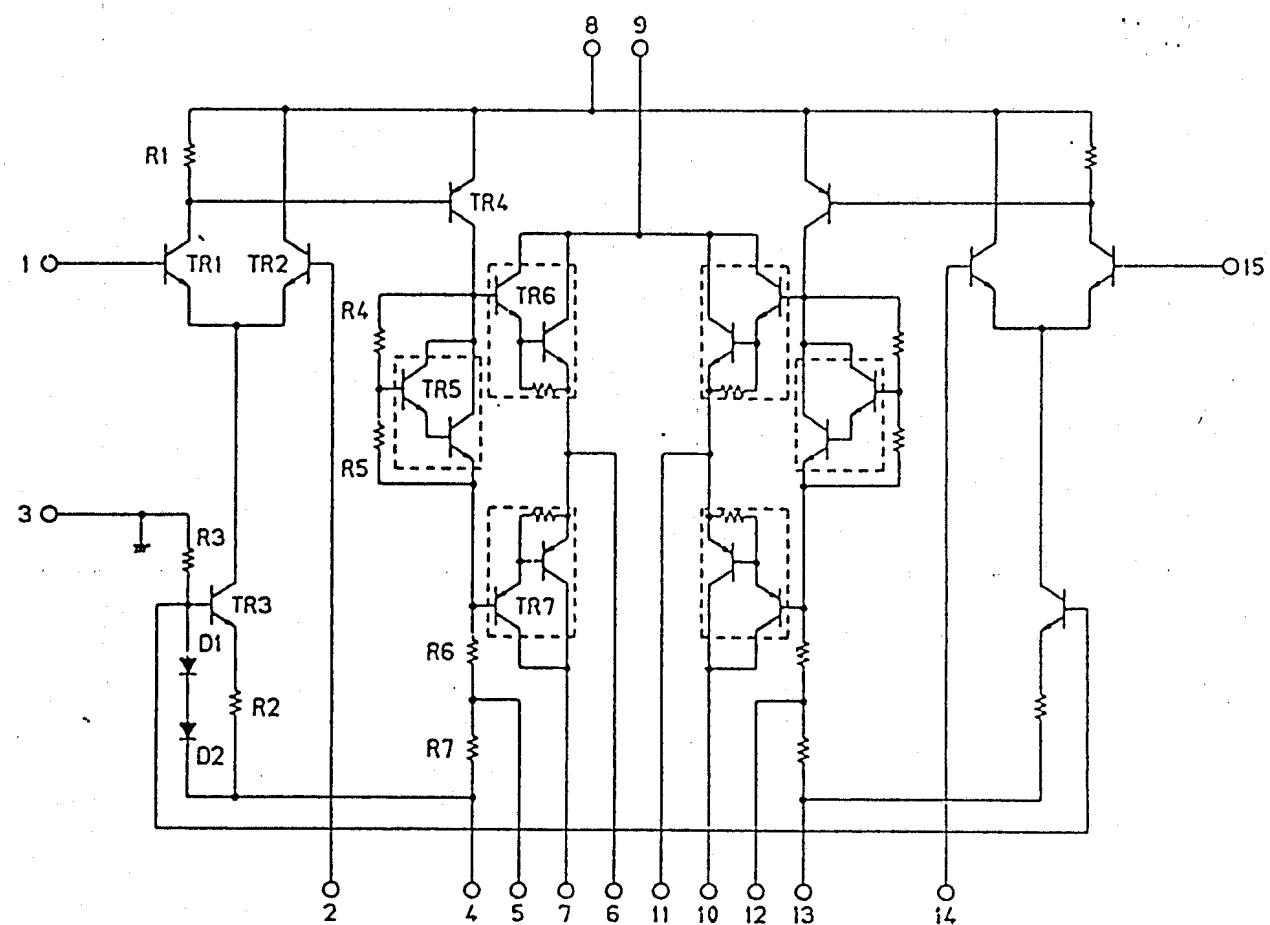

# Test Circuit (STK4273)

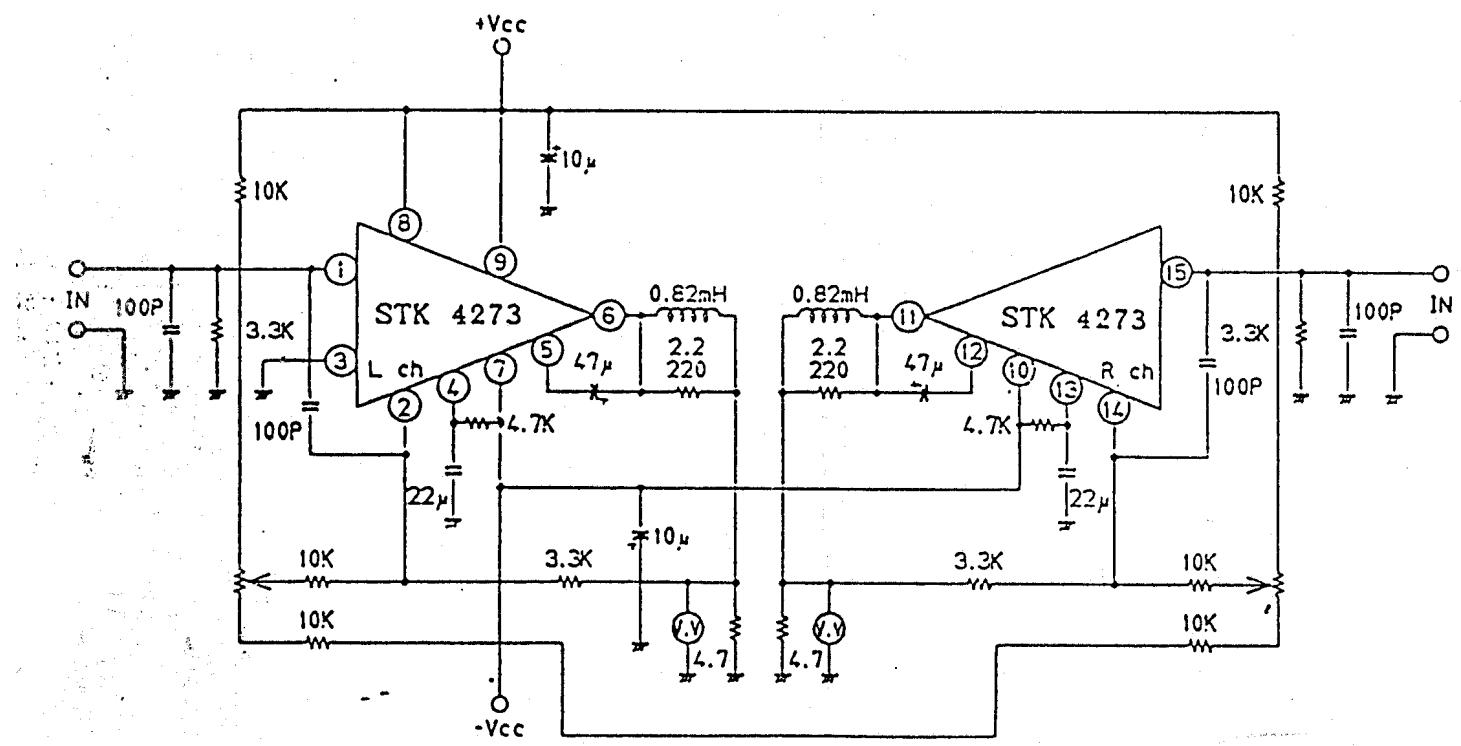

### Case Outline (unit : mm)

