





PRODUCT SPECIFICATION

COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW614S


SHEET 1 OF 10

- OUTSIDE DIMENSION :

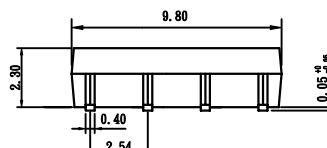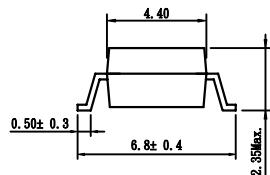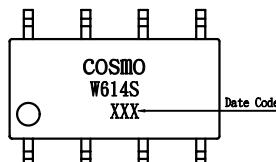


Unit:mm
Tolerance:± 0.2 mm

- Turn on/Turn off time

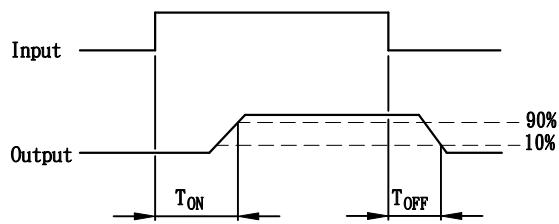

- Operate/Reverse time

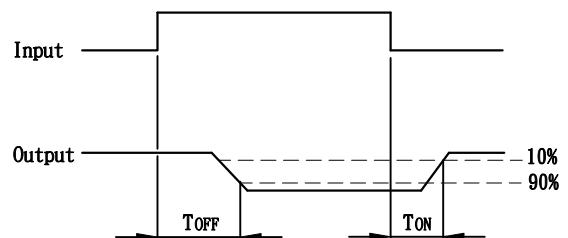

Absolute Maximum Ratings ($T_A=25^\circ C$)

Emitter (Input)

Reverse Voltage	5.0V
Continuous Forward Current	50mA
Peak Forward Current (1s)	1A
Power Dissipation.	100mW
Derate Linearly from 25° C	1.3mW/° C

Detector (Output)

Output Breakdown Voltage	± 400V
Continous Load Current	± 130mA
Power Dissipation	500mW

General Characteristics

Isolation Test Voltage.	1500VAC _{RMS}
---------------------------------	------------------------

Isolation Resistance

$V_{IO} = 500V$, $T_A = 25^\circ C$	$\geq 10^{10} \Omega$
--	-----------------------

Total Power Dissipation	550mW
-----------------------------------	-------


Derate Linearly form 25° C	2.5mW/° C
--------------------------------------	-----------

Storage Temperature Range	-40 to +150° C
-------------------------------------	----------------

Operating Temperature Range.	-40 to +85° C
--------------------------------------	---------------

Junction Temperature	100° C
--------------------------------	--------

Soldering Temperature, 2mm from case, 10 sec.	260° C
---	--------

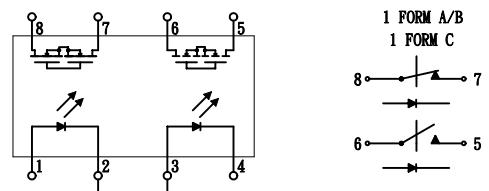

PRODUCT SPECIFICATION

COSMO ELECTRONICS CO., LTD.	PHOTO MOS RELAYS: KAQW614S	SHEET 2 OF 10
---------------------------------------	--------------------------------------	---------------

Characteristics

($T_A = 25^\circ C$)

Description	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Emitter (Input)						
Forward Voltage	V_F		1.8	2.0	V	$I_F = 10mA$
Operation Input Current	$I_{FON(N.O)}$ $I_{FOFF(N.C)}$			5	mA	$V_L = \pm 20V, I_L = 100mA(N.O)$ $V_L = \pm 20V, I_L = < 5\mu A(N.C)$ $t = 10 ms$
Recovery Input Current	$I_{FOFF(N.O)}$ $I_{FON(N.C)}$	0.2			mA	$V_L = \pm 20V, I_L = < 5\mu A(N.O)$ $V_L = \pm 20V, I_L = 100mA(N.C)$ $t = 10 ms$
Deterctor (Output) normally open						
Output Breakdown Voltage	V_B	400			V	$I_B = 50\mu A$
Output Off-State Leakage	$I_{T(OFF)}$		0.2	1	uA	$V_T = 100V, I_F = 0mA$
I/O Capacitance	C_{ISO}		6		pF	$I_F = 0, f = 1MHz$
ON Resistance	R_{ON}		20	30	Ω	$I_L = 100mA, I_F = 10mA$
Turn-on Time	T_{ON}		0.3	1.0	ms	$I_F = 10mA, V_L = \pm 20V$
Turn-off Time	T_{OFF}		0.7	1.5	ms	$t = 10ms, I_L = \pm 100mA$

Deterctor (Output) normally close						
Output Breakdown Voltage		V_B	400		V	$I_B = 50\mu A$
Output Off-State Leakage		$I_{T(OFF)}$		0.2	1	uA
I/O Capacitance		C_{ISO}		6		pF
ON Resistance		R_{ON}		40	50	Ω
Reverse(ON) Time		T_{ON}		0.6	1.5	ms
Operate(OFF) Time		T_{OFF}		0.3	1.0	ms
						$t = 10ms, I_L = \pm 100mA$

Mos Relay Schematic and Wiring Diagrams						
Type	Schematic	Output configuration	Load	Con-nection	Wiring diagram	
KAQW614S	 1a1b AC/DC	-			(1) Two independent 1 Form A & 1 Form B use (2) 1 Form A 1 Form B use 	

PRODUCT SPECIFICATION


COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW614S


SHEET 3 OF 10

Normally Open Characteristics DATA CURVE


Load current vs. ambient temperature
Allowable ambient temperature:
 -40°C to 85°C

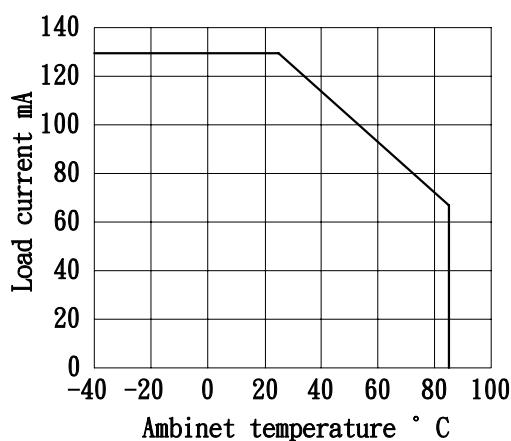


On resistance vs. ambient temperature
Across terminals 5 and 6 pin
LED current: 5mA
Continuous load current: 130 mA(DC)

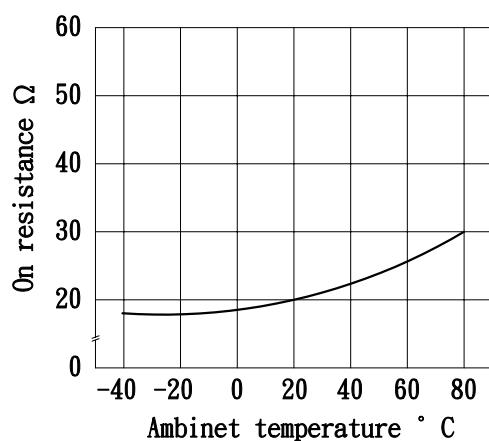

Turn on time vs. ambient temperature
Load voltage 400 V(DC)
LED current : 5mA
Continuous load current: 130mA(DC)

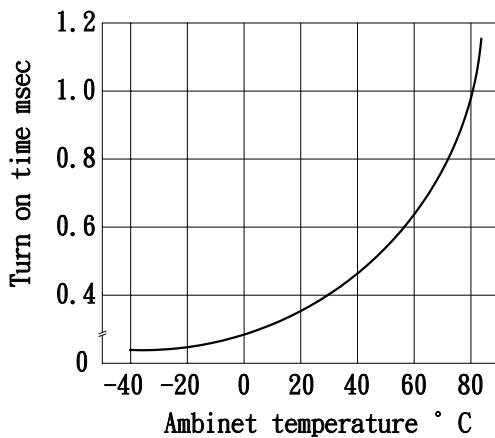

Turn off time vs. ambient temperature
LED current: 5mA; Load voltage: 400V(DC)
Continuous load current: 130mA(DC)

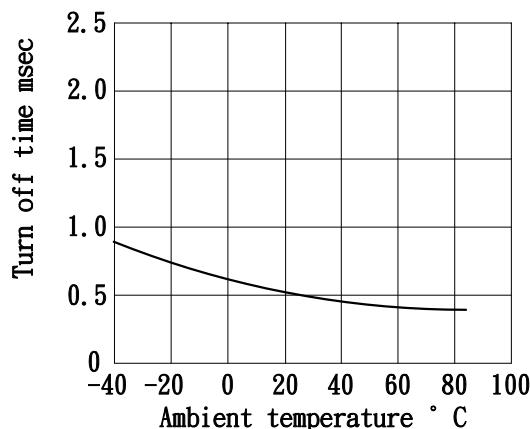

PRODUCT SPECIFICATION


COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW614S

SHEET 4 OF 10


LED operate vs. ambient temperature
Load voltage: 400V(DC)

Continuous load current: 130mA(DC)

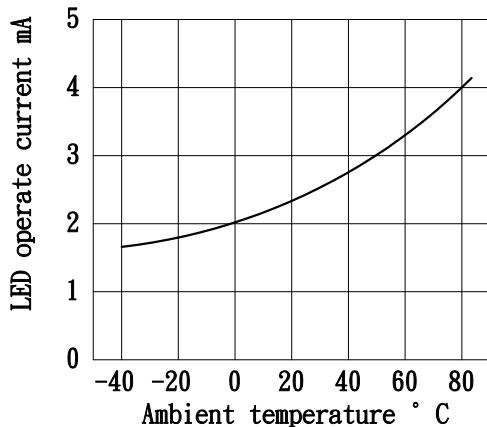


LED turn off current vs. ambient temperature
Load voltage: 400V(DC)

Continuous load current: 130mA(DC)

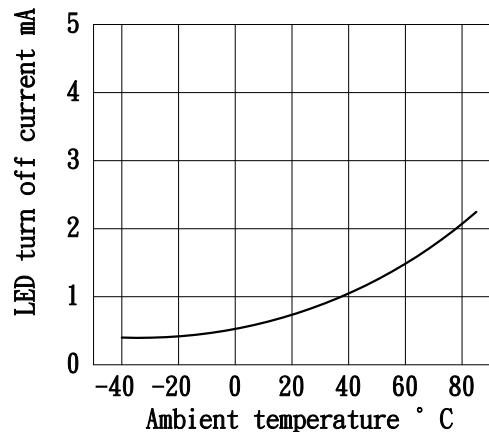

LED dropout voltage vs. ambient temperature


LED current: 5 to 50mA

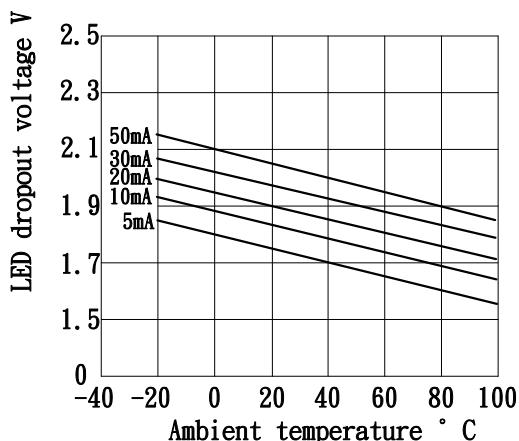

Voltage vs. current characteristics of output at MOS FET portion

Measured portion: across terminals 5 and 6 pin


Ambient temperature: 25°C

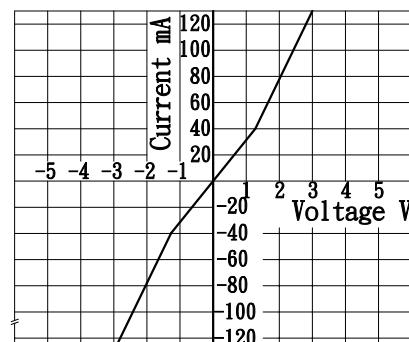


PRODUCT SPECIFICATION

COSMO ELECTRONICS CO., LTD.	PHOTO MOS RELAYS: KAQW614S	SHEET 5 OF 10
---------------------------------------	--------------------------------------	---------------


LED forward current vs. turn on time
Across terminals 5 and 6pin; Load voltage: 400V(DC); Continuous load current: 130mA(DC); Ambient temperature: 25° C

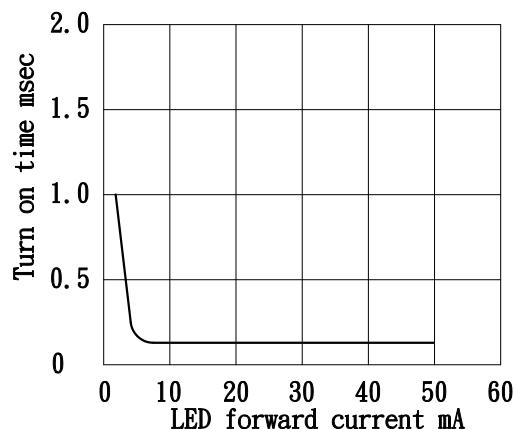


Off state leakage current
Across terminals 5 and 6pin
Ambient temperature: 25° C

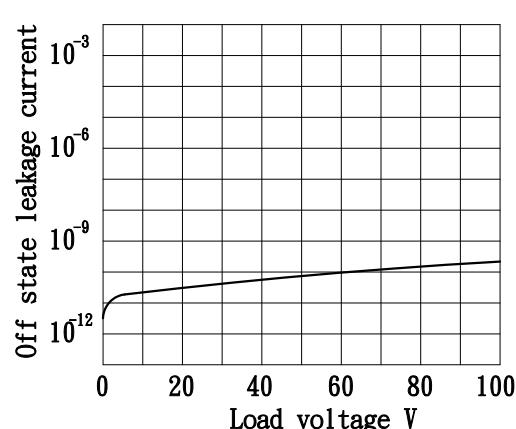

LED forward current vs. turn off time
Across terminals 5 and 6pin; Load voltage: 400V(DC); Continuous load current: 130 mA(DC); Ambient temperature: 25° C

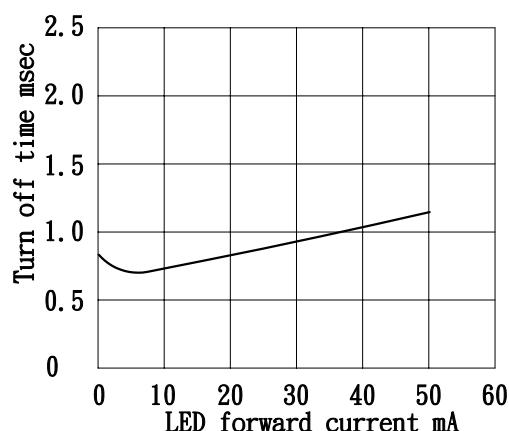

Applied voltage vs. output capacitance
Across terminals 5 and 6pin
Frequency: 1MHz; Ambient temperature: 25° C

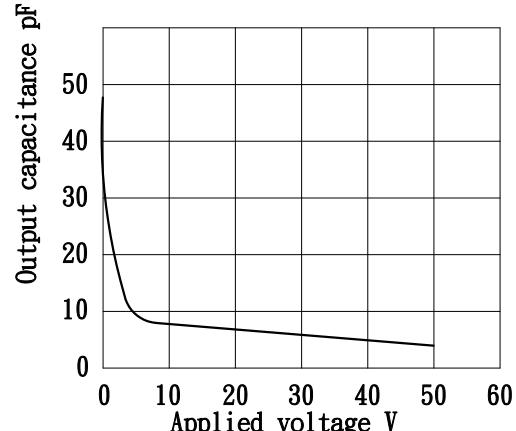


PRODUCT SPECIFICATION


COSMO ELECTRONICS CO., LTD.	PHOTO MOS RELAYS: KAQW614S	SHEET 6 OF 10
---------------------------------------	--------------------------------------	---------------

Normally Close Characteristics DATA CURVE


Load current vs. ambient temperature
Allowable ambient temperature:
 -40°C to 85°C

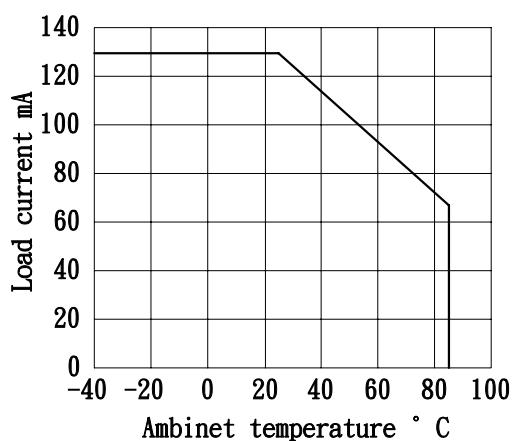


On resistance vs. ambient temperature
Across terminals 7 and 8 pin
LED current: 0mA
Continuous load current: 130 mA(DC)

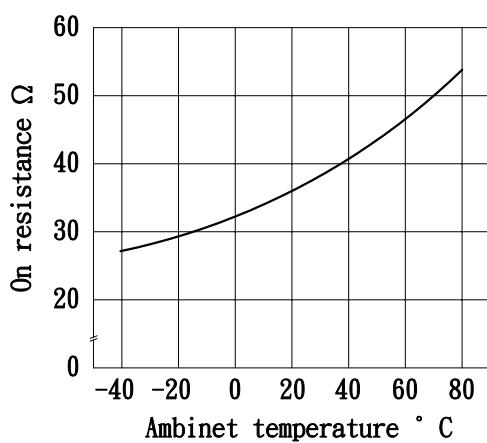

Operate(OFF) time vs. ambient temperature
Load voltage 400 V(DC)
LED current : 5mA
Continuous load current: 130mA(DC)

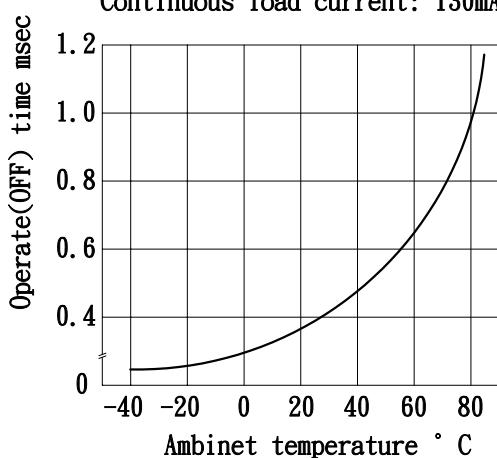

Reverse(ON) time vs. ambient temperature
LED current: 5mA; Load voltage: 400V(DC)
Continuous load current: 130mA(DC)

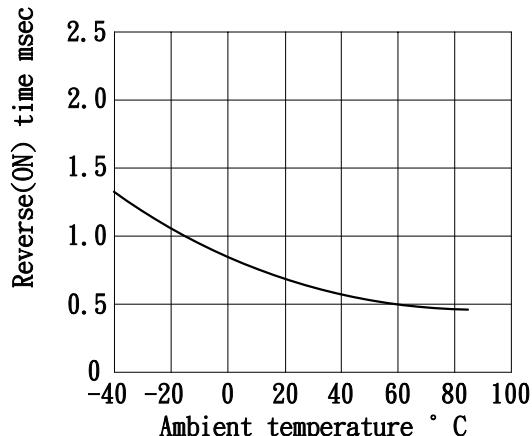


PRODUCT SPECIFICATION

COSMO ELECTRONICS CO., LTD.	PHOTO MOS RELAYS: KAQW614S	SHEET 7 OF 10
---------------------------------------	--------------------------------------	---------------


LED operate(OFF) vs. ambient temperature
Load voltage: 400V(DC)

Continuous load current: 130mA(DC)

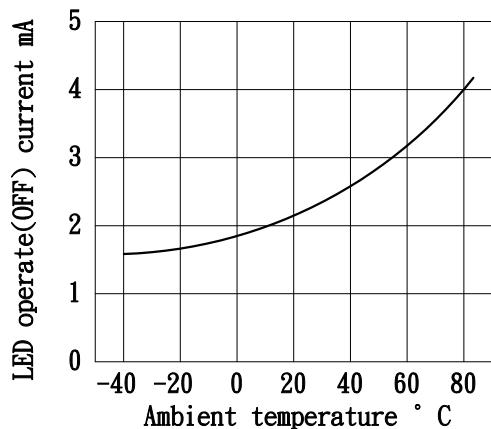


LED reverse(ON) current vs. ambient temperature
Load voltage: 400V(DC)

Continuous load current: 130mA(DC)

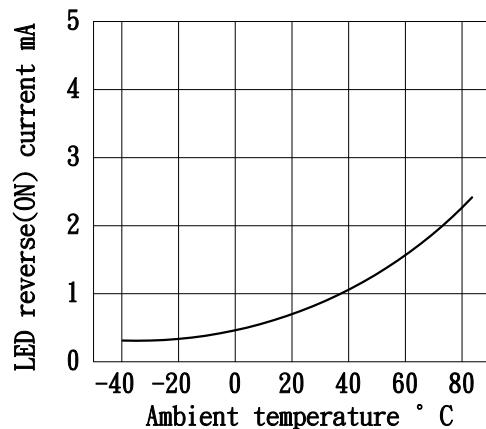

LED dropout voltage vs. ambient temperature


LED current: 5 to 50mA

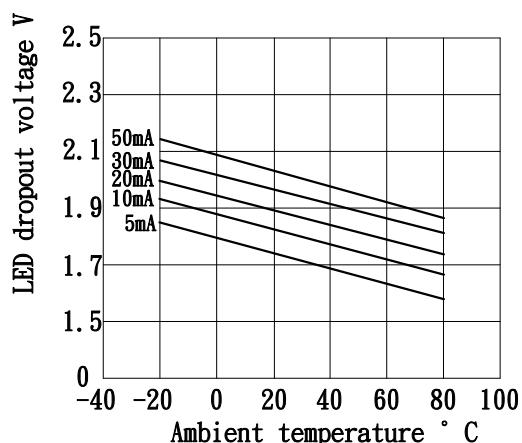

Voltage vs. current characteristics of output at MOS FET portion

Measured portion: across terminals 7 and 8 pin

Ambient temperature: 25°C

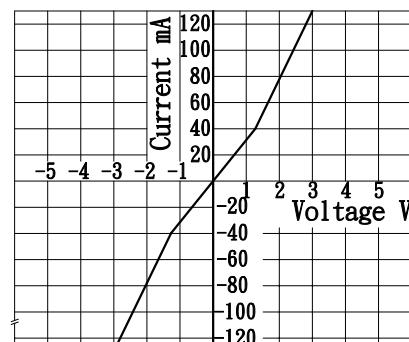


PRODUCT SPECIFICATION

COSMO
ELECTRONICS CO., LTD.


PHOTO MOS RELAYS:
KAQW614S

SHEET 8 OF 10


LED forward current vs. Operate(OFF) time
Across terminals 7 and 8pin; Load voltage:
400V(DC); Continuous load current: 130mA(DC)
; Ambient temperature: 25° C

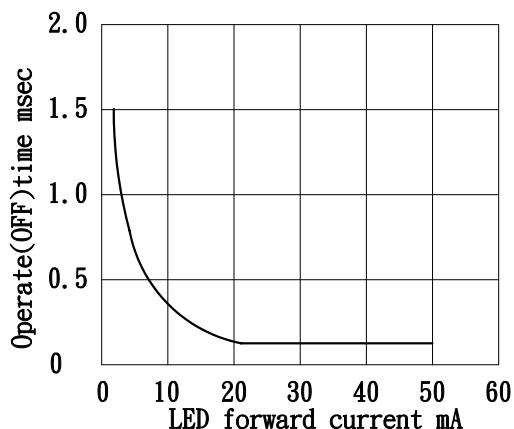


Off state leakage current
Across terminals 7 and 8pin
Ambient temperature: 25° C

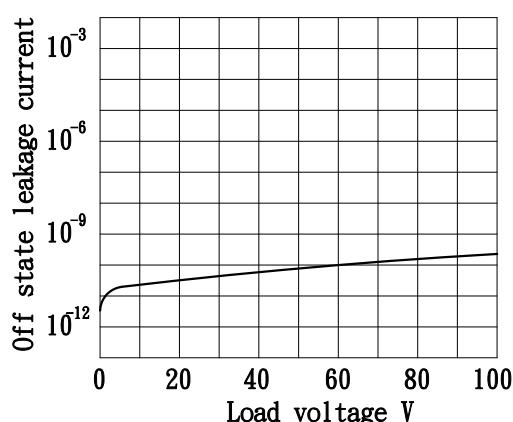

LED forward current vs. reverse(ON) time
Across terminals 7 and 8pin; Load voltage: 400V(DC); Continuous load current: 130 mA(DC); Ambient temperature: 25° C

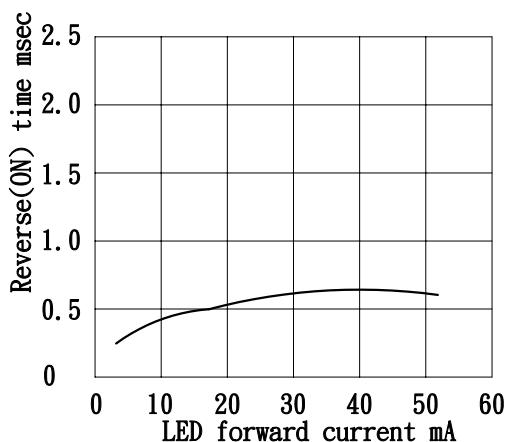

Applied voltage vs. output capacitance
Across terminals 7 and 8pin
Frequency: 1MHz; Ambient temperature:
25° C

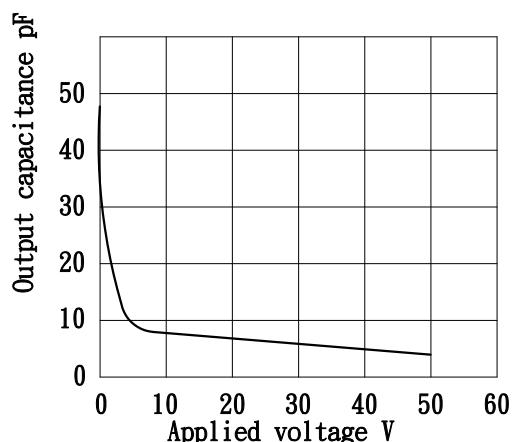

PRODUCT SPECIFICATION

COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW614S


SHEET 9 OF 10

USING METHODS

Examples of resistance value to control LED forward current I_F


Photo MOSRELAY

($I_F = 5\text{mA}$)

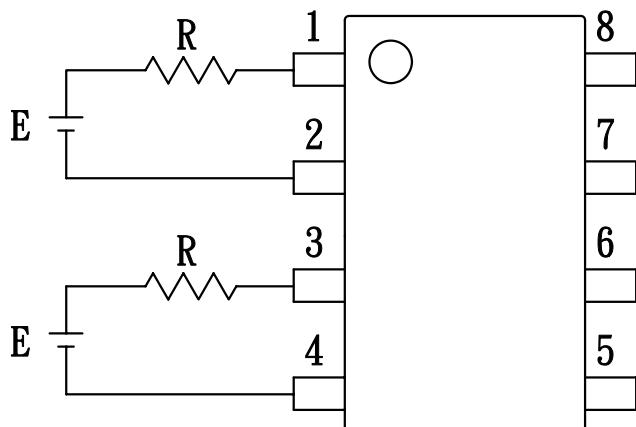

E	R
3.3V	Approx. 240 ohm
5V	Approx. 540 ohm
12V	Approx. 1.8K ohm
15V	Approx. 2.4K ohm
24V	Approx. 4K ohm

- (1) LED forward current must be more than 5mA, at E min.
- (2) LED forward current must be less than 50mA, at E max.

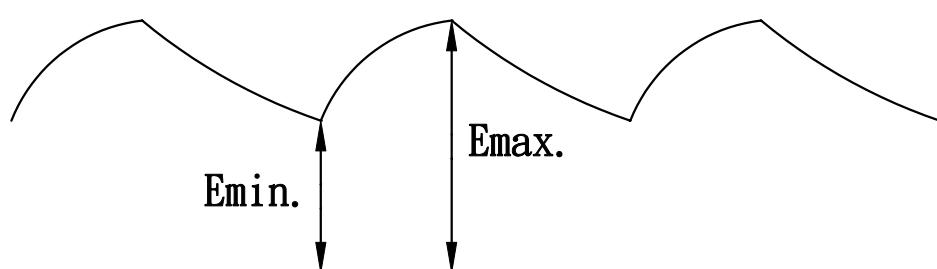

PRODUCT SPECIFICATION



COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW614S

SHEET 10 OF 10

USING METHODS

Regulate the spike voltage generated on the inductive load as follows

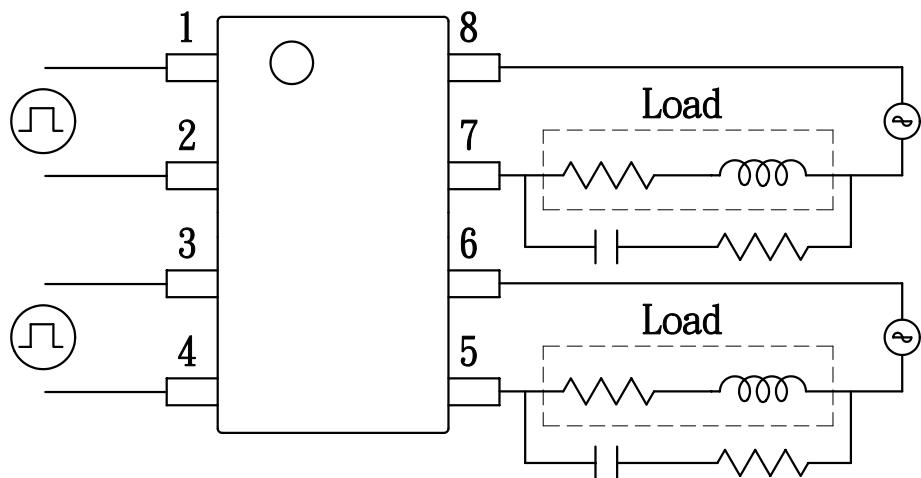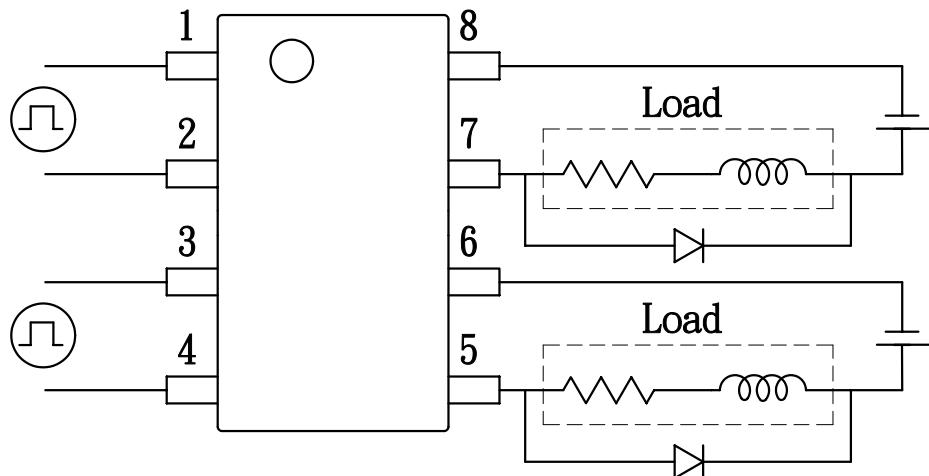

R-C Snubber