

General-purpose Operational Amplifier / Comparator


Low Voltage CMOS Comparator

**BU7251G,BU7251SG, BU7231G,BU7231SG,
BU7252F/FVM,BU7252S F/FVM, BU7232F/FVM,BU7232S F/FVM**



Description


CMOS comparator BU7251/BU7231family and BU7252/BU7232 family are input full swing and push pull output comparator. These ICs integrate one op-amp or two independent op-amps and phase compensation capacitor on a single chip. The features of these ICs are low operating supply Voltage that is +1.8V to +5.5V(single supply) and low supply current, extremely low input bias current.

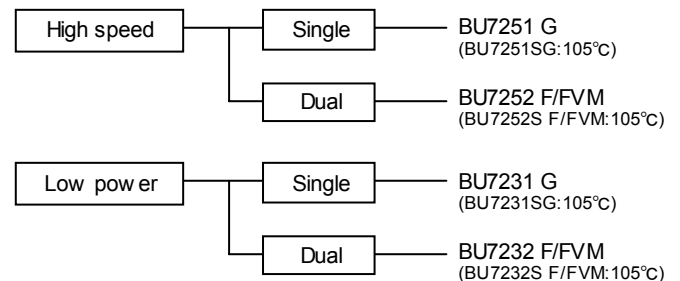

Features


- | | |
|---|---|
| <ol style="list-style-type: none"> 1) Low operating supply voltage (+1.8[V]~+5.5[V]) 2) +1.8[V]~+5.5[V](single supply)
±0.9[V]~±2.75[V](split supply) 3) Input and Output full swing 4) Push-pull output type 5) High speed operation
(BU7251 family, BU7252 family) 6) Low supply current
(BU7231 family, BU7232 family) | <ol style="list-style-type: none"> 7) Internal ESD protection
Human body model (HBM) ±4000[V](Typ.) 8) Wide temperature range
-40[°C]~+85[°C]
(BU7251G,BU7252 family, BU7231G, BU7232 family)
-40[°C]~+105[°C]
(BU7251SG,BU7252S family, BU7231SG,BU7232S family) |
|---|---|

Pin Assignments

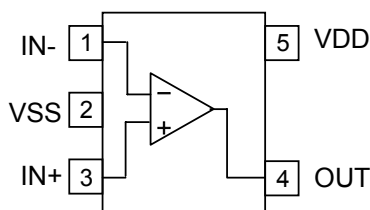

SSOP5

BU7251G
BU7251SG
BU7231G
BU7231SG

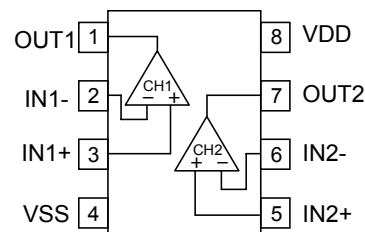

SOP8

BU7252F
BU7252SF
BU7232F
BU7232SF

MSOP8

BU7252FVM
BU7252SFVM
BU7232FVM
BU7232SFVM

● Absolute maximum ratings (Ta=25[°C])

Parameter	Symbol	Rating		Unit
		BU7251G, BU7252 F/FVM BU7231G, BU7232 F/FVM	BU7251SG, BU7252S F/FVM BU7231SG, BU7232S F/FVM	
Supply Voltage	VDD-VSS	+7		V
Differential Input Voltage (*1)	Vid	VDD – VSS		V
Input Common-mode voltage range	Vicm	(VSS – 0.3) to VDD + 0.3		V
Operating Temperature	Topr	– 40 to + 85	– 40 to + 105	°C
Storage Temperature	Tstg	– 55 to + 125		°C
Maximum junction Temperature	Tjmax	+ 125		°C

Note: Absolute maximum rating item indicates the condition which must not be exceeded.

Application of voltage in excess of absolute maximum rating or use out absolute maximum rated temperature environment may cause deterioration of characteristics.

(*1) The voltage difference between inverting input and non-inverting input is the differential input voltage.
Then input terminal voltage is set to more than VEE.

● Electrical characteristics

○BU7251 family, BU7252 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

Parameter	Symbol	Temperature range	Guaranteed Limit						Unit	Condition
			BU7251G BU7251SG			BU7252 F/FVM BU7252S F/FVM				
			Min.	Typ.	Max.	Min.	Typ.	Max.		
Input Offset Voltage (*2)(*4)	Vio	25°C	-	1	11	-	1	11	mV	—
Input Offset Current (*2)	Iio	25°C	-	1	-	-	1	-	pA	—
Input Bias Current (*2)	Ib	25°C	-	1	-	-	1	-	pA	—
Input Common-mode voltage Range	Vicm	25°C	0	-	3	0	-	3	V	(VDD-VSS)=3[V]
Large Signal Voltage Gain	AV	25°C	-	90	-	-	90	-	dB	RL=10[kΩ]
Supply current(*4)	IDD	25°C	-	15	35	-	35	65	μA	RL=∞
		full range	-	-	50	-	-	80		
Power supply rejection ratio	PSRR	25°C	-	80	-	-	80	-	dB	—
Common-mode rejection ratio	CMRR	25°C	-	80	-	-	80	-	dB	—
Output source current (*3)	IOH	25°C	1	2	-	1	2	-	mA	VDD-0.4
Output sink current (*3)	IOL	25°C	3	6	-	3	6	-	mA	VSS+0.4
High Level Output Voltage (*4)	VOH	25°C	VDD-0.1	-	-	VDD-0.1	-	-	V	RL=10[kΩ]
Low Level Output Voltage (*4)	VOL	25°C	-	-	VSS+0.1	-	-	VSS+0.1	V	RL=10[kΩ]
Output rise time	Tr	25°C	-	50	-	-	50	-	ns	CL=15pF 100mV over drive
Output fall time	Tf	25°C	-	20	-	-	20	-	ns	CL=15pF 100mV over drive
Propagation delay L to H	TPLH	25°C	-	0.55	-	-	0.55	-	μs	CL=15pF 100mV over drive
Propagation delay H to L	TPHL	25°C	-	0.25	-	-	0.25	-	μs	CL=15pF 100mV over drive

(*2) Absolute values

(*3) Reference to power dissipation under the high temperature environment and decide the output current.
Continuous short circuit is occurring the degenerate of output current characteristics.

(*4) Full range BU7251,BU7252 : Ta=-40[°C] to +85[°C] BU7251S,BU7252S : Ta=-40[°C] to +105[°C]

● Electrical characteristics

○BU7231 family, BU7232 family (Unless otherwise specified VDD=+3[V], VSS=0[V], Ta=25[°C])

Parameter	Symbol	Temperature range	Guaranteed limit						Unit	Condition
			BU7231G BU7231SG			BU7232F/FVM BU7232S F/FVM				
			Min.			Min.	Typ.	Max.		
Input Offset Voltage (*5)	Vio	25℃	-	1	11	-	1	11	mV	—
Input Offset Current (*5)	Iio	25℃	-	1	-	-	1	-	pA	—
Input Bias Current (*5)	Ib	25℃	-	1	-	-	1	-	pA	—
Input Common-mode voltage Range	Vicm	25℃	0	-	3	0	-	3	V	(VDD-VSS)=3[V]
Large Signal Voltage Gain	AV	25℃	-	90	-	-	90	-	dB	RL=10[kΩ]
Supply current	IDD	25℃	-	5	15	-	10	25	μA	RL=∞
		full range	-	-	30	-	-	50		
Power supply rejection ratio	PSRR	25℃	-	80	-	-	80	-	dB	—
Common-mode rejection ratio	CMRR	25℃	-	80	-	-	80	-	dB	—
Output source current (*6)	IOH	25℃	1	2	-	1	2	-	mA	VDD-0.4
Output sink current (*6)	IOL	25℃	3	6	-	3	6	-	mA	VSS+0.4
High Level Output Voltage (*7)	VOH	25℃	VDD-0.1	-	-	VDD-0.1	-	-	V	RL=10[kΩ]
Low Level Output Voltage (*7)	VOL	25℃	-	-	VSS+0.1	-	-	VSS+0.1	V	RL=10[kΩ]
Output rise time	Tr	25℃	-	50	-	-	50	-	ns	CL=15pF 100mV over drive
Output fall time	Tf	25℃	-	20	-	-	20	-	ns	CL=15pF 100mV over drive
Propagation delay L to H	TPLH	25℃	-	1.7	-	-	1.7	-	μs	CL=15pF 100mV over drive
Propagation delay H to L	TPHL	25℃	-	0.5	-	-	0.5	-	μs	CL=15pF 100mV over drive

(*5) Absolute values

(*6) Reference to power dissipation under the high temperature environment and decide the output current.
Continuous short circuit is occurring the degenerate of output current characteristics.

(*7) Full range BU7231,BU7232 : Ta=-40[°C] to +85[°C] BU7231S,BU7232S : Ta=-40[°C] to +105[°C]

● Example of electrical characteristics

○ BU7251 family

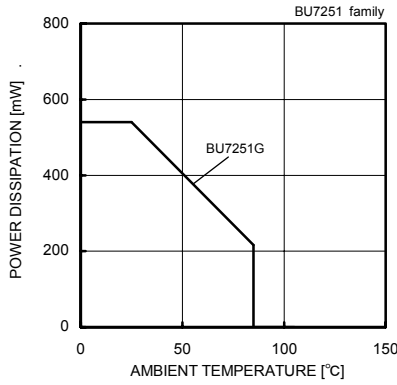


Fig.1
Derating Curve

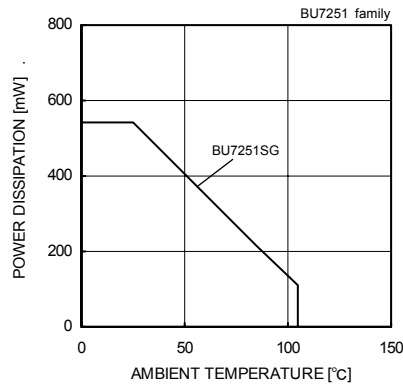


Fig.2
Derating Curve

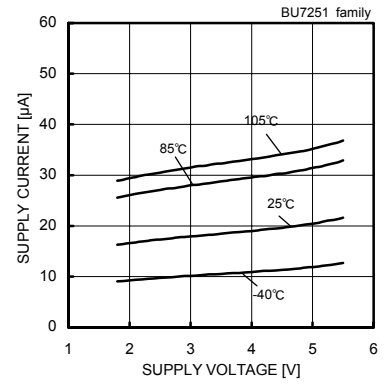


Fig.3
Supply Current – Supply Voltage

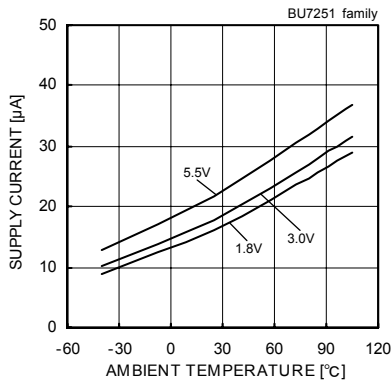


Fig.4
Supply Current – Ambient Temperature

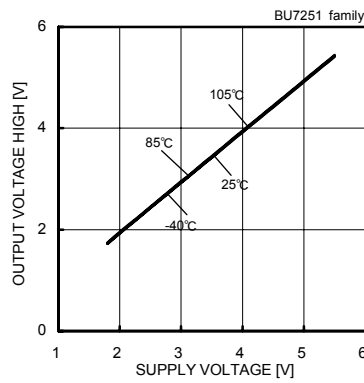


Fig.5
Output Voltage High – Supply Voltage
($R_L=10[k\Omega]$)

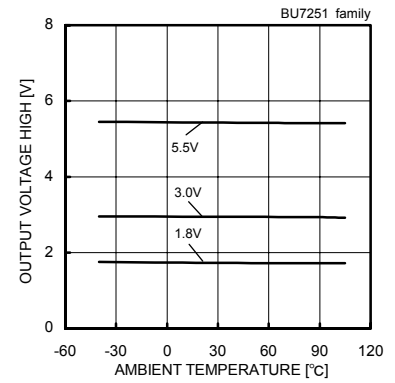


Fig.6
Output Voltage High – Ambient Temperature
($R_L=10[k\Omega]$)

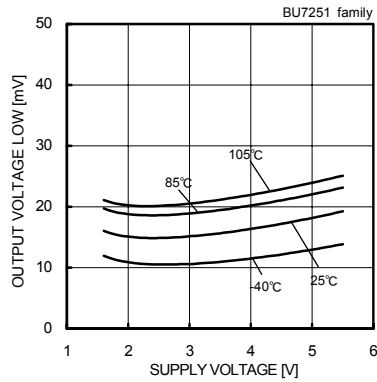


Fig.7
Output Voltage Low – Supply Voltage
($R_L=10[k\Omega]$)

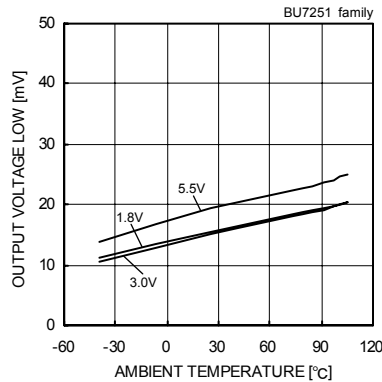


Fig.8
Output Voltage Low – Ambient Temperature
($R_L=10[k\Omega]$)

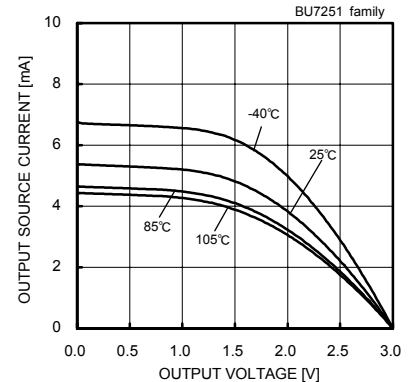


Fig.9
Output Source Current – Supply Voltage
($V_{DD}=3[V]$)

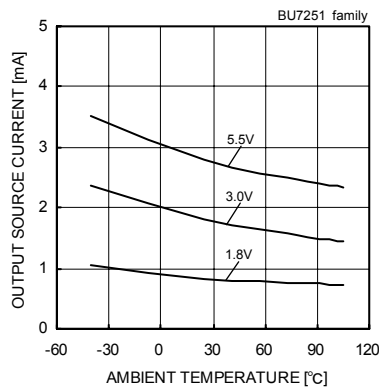


Fig.10
Output Source Current – Ambient Temperature
($V_{OUT}=V_{DD}-0.4[V]$)

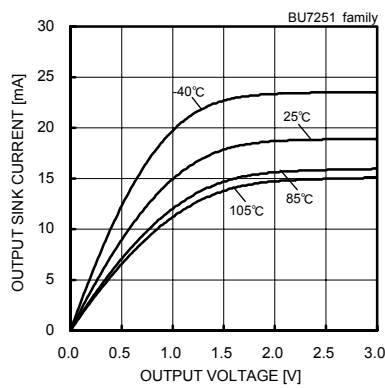


Fig.11
Output Sink Current – Output Voltage
($V_{DD}=3[V]$)

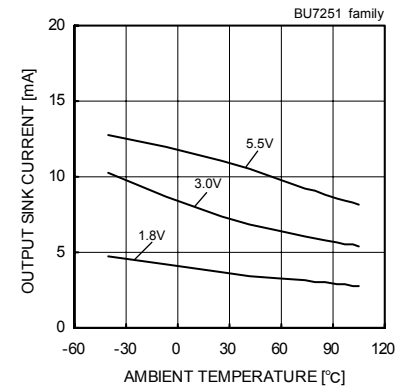


Fig.12
Output Sink Current – Ambient Temperature
($V_{OUT}=V_{SS}+0.4[V]$)

(*) The above data is ability value of sample, it is not guaranteed. BU7251G : $-40[^\circ\text{C}]$ to $+85[^\circ\text{C}]$ BU7251SG : $-40[^\circ\text{C}]$ to $+105[^\circ\text{C}]$

○BU7251 family

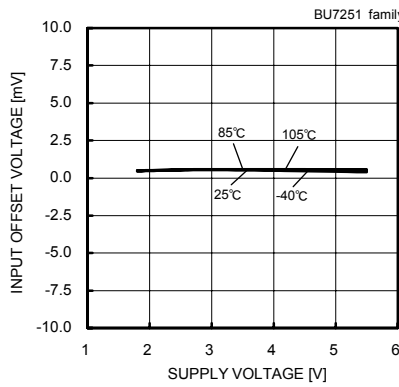


Fig.13
Input Offset Voltage – Supply Voltage
($V_{icm}=V_{DD}$, $V_{out}=0.1[V]$)

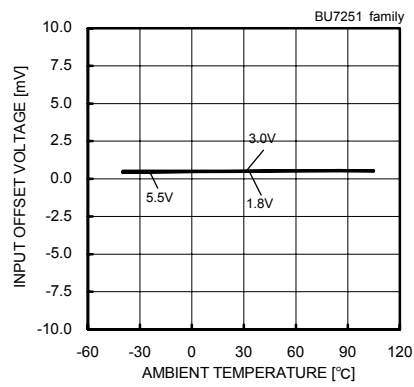


Fig.14
Input Offset Voltage – Ambient Temperature
($V_{icm}=V_{DD}$, $V_{out}=0.1[V]$)

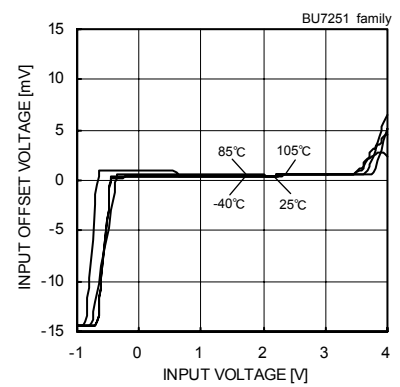


Fig.15
Input offset voltage – Input Voltage
($V_{DD}=3[V]$)

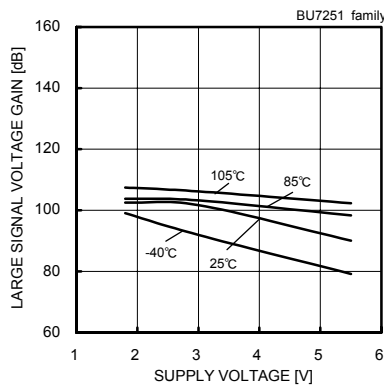


Fig.16
Large Signal Voltage Gain – Supply Voltage

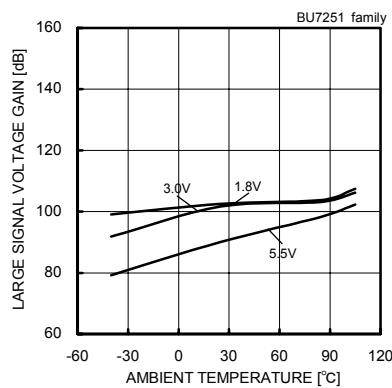


Fig.17
Large Signal Voltage Gain – Ambient Temperature

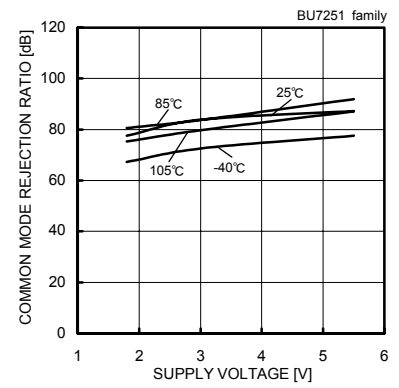


Fig.18
Common Mode rejection Ratio – Supply Voltage
($V_{DD}=3[V]$)

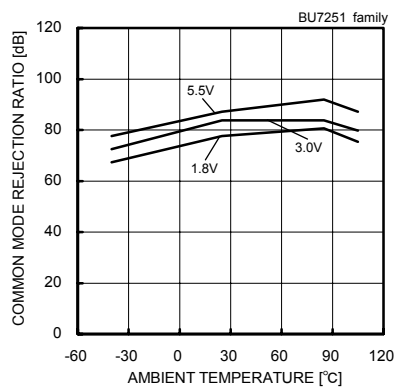


Fig.19
Common Mode Rejection Ratio – Ambient Temperature
($V_{DD}=3[V]$)

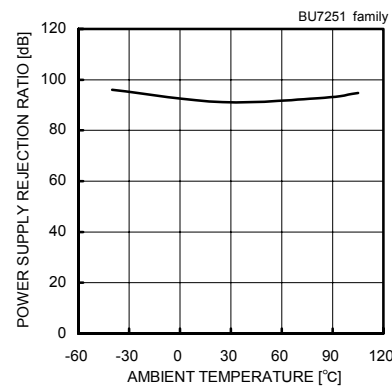


Fig.20
Power Supply Rejection – Ambient Temperature

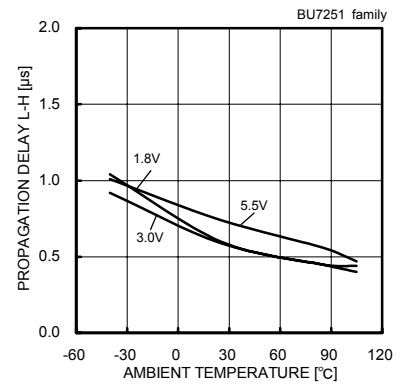


Fig.21
Propagation Delay L-H – Ambient Temperature

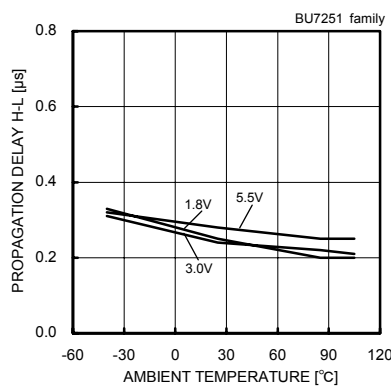


Fig.22
Propagation Delay H-L – Ambient Temperature

(*) The above data is ability value of sample, it is not guaranteed. BU7251G : $-40[^{\circ}C]$ to $+85[^{\circ}C]$ BU7251SG : $-40[^{\circ}C]$ to $+105[^{\circ}C]$

○BU7252 family

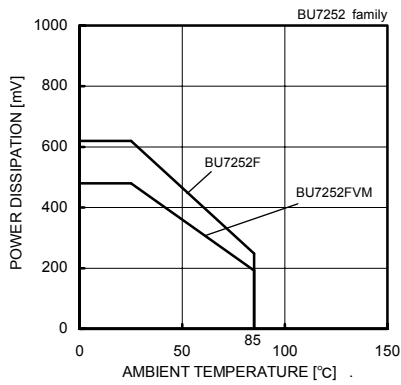


Fig.1
Derating Curve

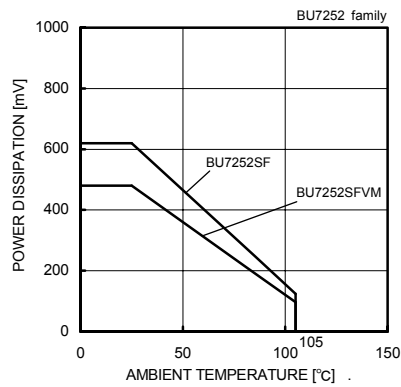


Fig.2
Derating Curve

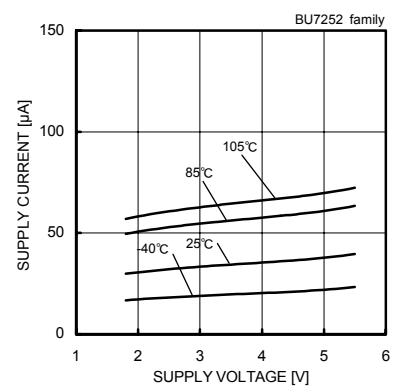


Fig.3
Supply Current – Supply Voltage

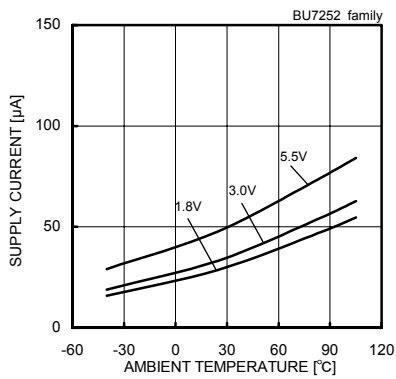


Fig.4
Supply Current – Ambient Temperature

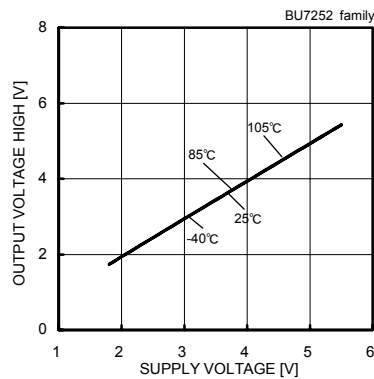


Fig.5
Output Voltage High – Supply Voltage
($R_L=10[k\Omega]$)

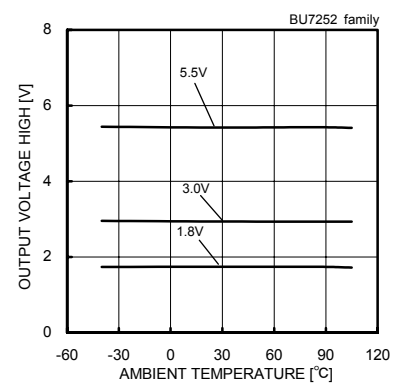


Fig.6
Output Voltage High – Ambient Temperature
($R_L=10[k\Omega]$)

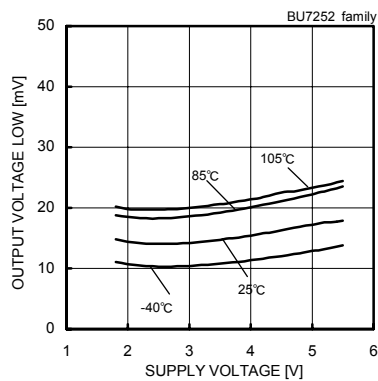


Fig.7
Output Voltage Low – Supply Voltage
($R_L=10[k\Omega]$)

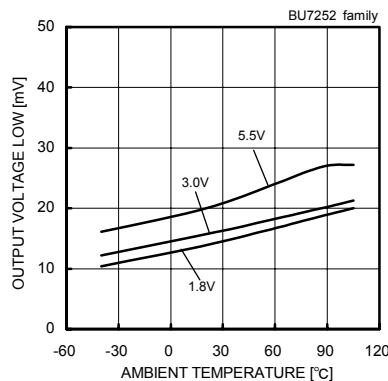


Fig.8
Output Voltage Low – Ambient Temperature
($R_L=10[k\Omega]$)

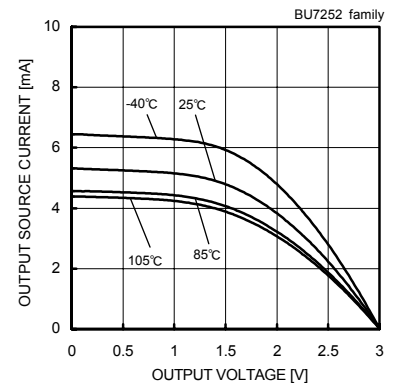


Fig.9
Output Source Current – Output Voltage
($V_{DD}=3[V]$)

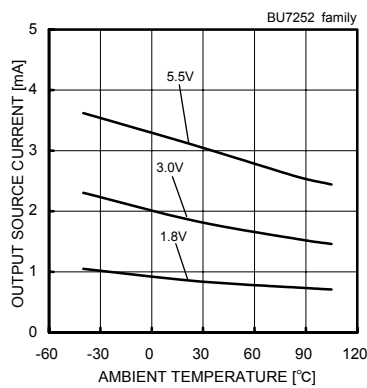


Fig.10
Output Source Current – Ambient Temperature

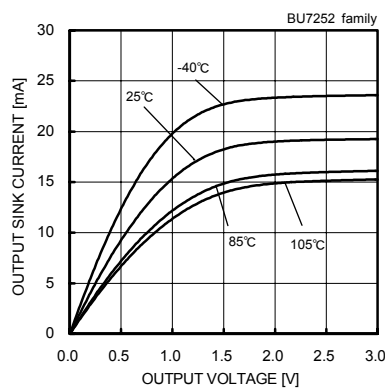


Fig.11
Output Sink Current – Output Voltage
($V_{DD}=3[V]$)

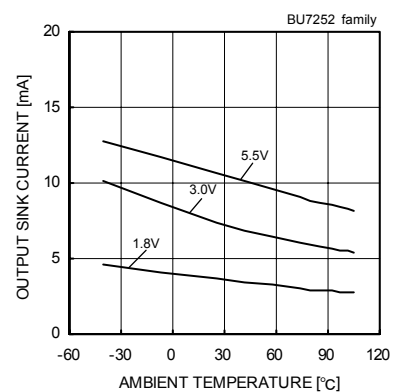


Fig.12
Output Sink Current – Ambient Temperature
($V_{OUT}=V_{SS}+0.4[V]$)

(*) The above data is ability value of sample, it is not guaranteed. BU7252 F/FVM : $-40[^\circ\text{C}]$ to $+85[^\circ\text{C}]$ BU7252S F/FVM : $-40[^\circ\text{C}]$ to $+105[^\circ\text{C}]$

○BU7252 family

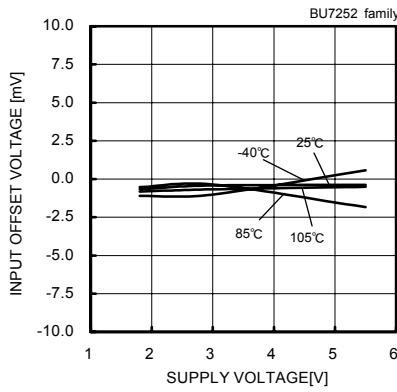


Fig.13
Input Offset Voltage – Supply Voltage
($V_{cm}=V_{DD}$, $V_{OUT}=0.1[V]$)

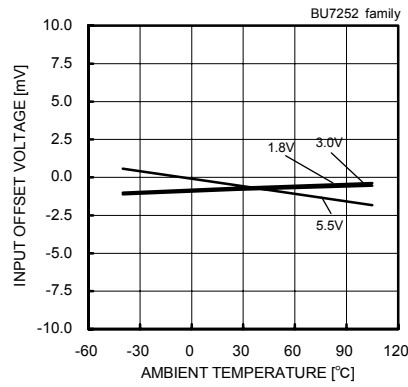


Fig.14
Input Offset Voltage – Ambient Temperature
($V_{cm}=V_{DD}$, $V_{OUT}=0.1[V]$)

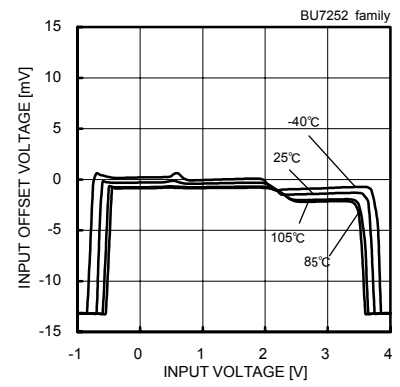


Fig.15
Input Offset Voltage – Input Voltage
($V_{DD}=3[V]$)

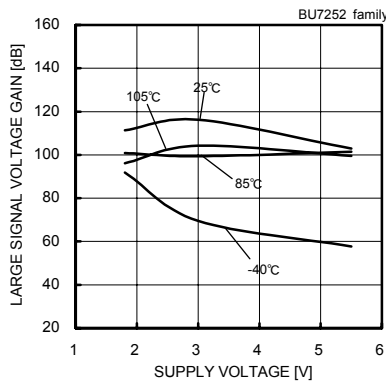


Fig.16
Large Signal Voltage Gain – Supply Voltage

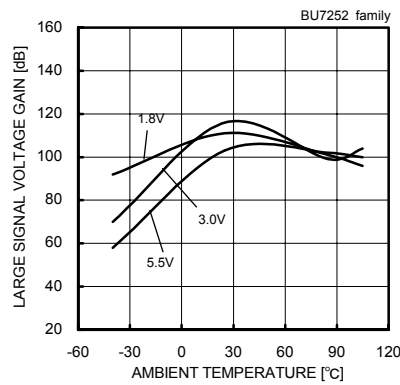


Fig.17
Large Signal Voltage Gain
– Ambient Temperature

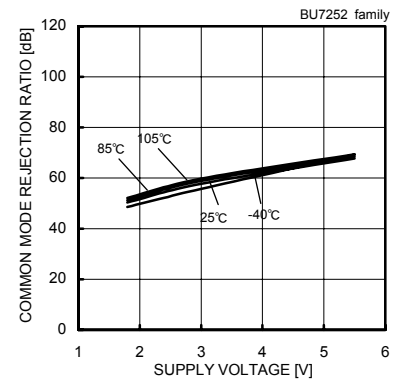


Fig.18
Common Mode Rejection Ratio
– Supply Voltage ($V_{DD}=3[V]$)

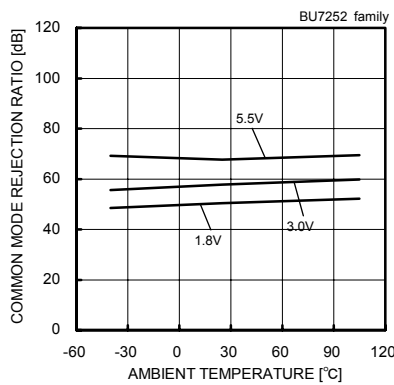


Fig.19
Common Mode Rejection – Ambient Temperature
($V_{DD}=3[V]$)

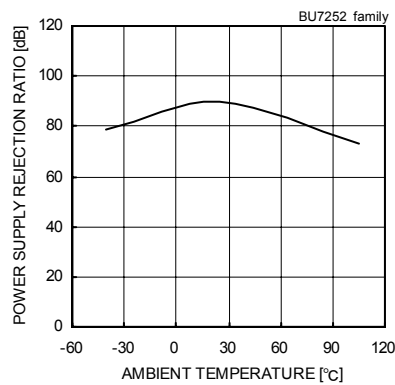


Fig.20
Power Supply Rejection Ratio – Ambient

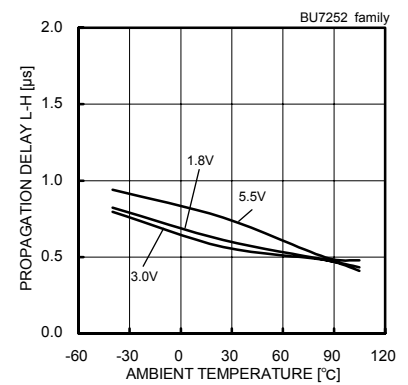


Fig.21
Propagation Delay L-H – Ambient Temperature

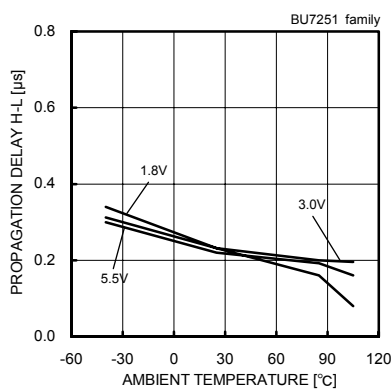


Fig.22
Propagation Delay H-L – Ambient Temperature

(*) The above data is ability value of sample, it is not guaranteed. BU7252 F/FVM : $-40[^{\circ}C]$ to $+85[^{\circ}C]$ BU7252S F/FVM : $-40[^{\circ}C]$ to $+105[^{\circ}C]$

○BU7231 series

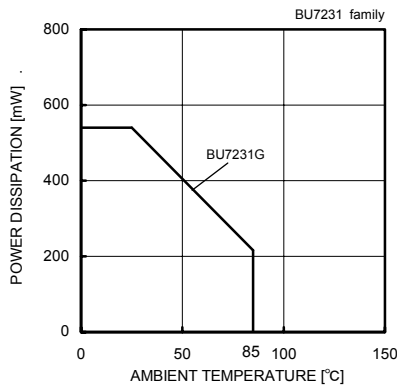


Fig.1
Derating Curve

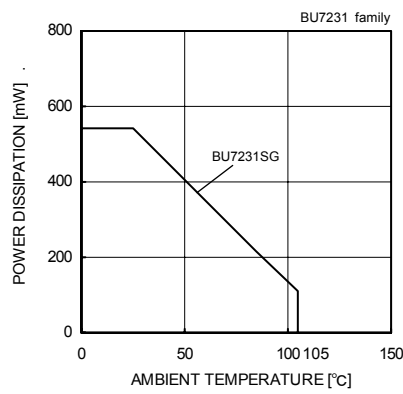


Fig.2
Derating Curve

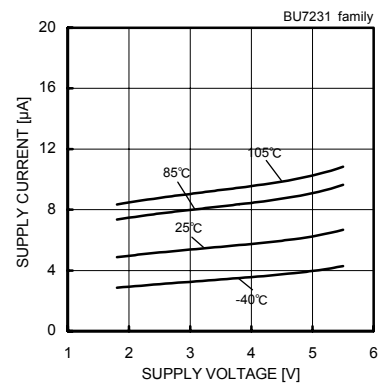


Fig.3
Supply Current – Supply Voltage

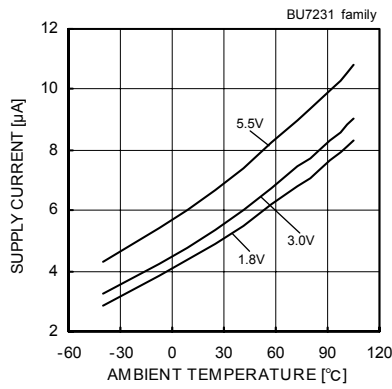


Fig.4
Supply Current – Ambient Temperature

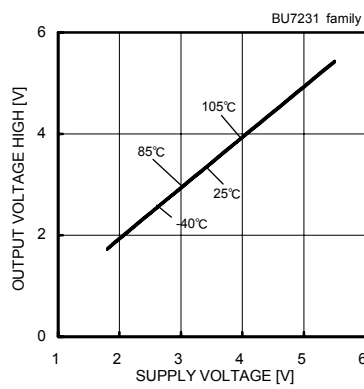


Fig.5
Output Voltage – Supply Voltage
($R_L=10[k\Omega]$)

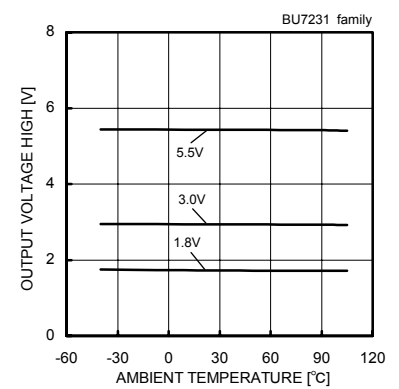


Fig.6
Output Voltage High – Ambient Temperature
($R_L=10[k\Omega]$)

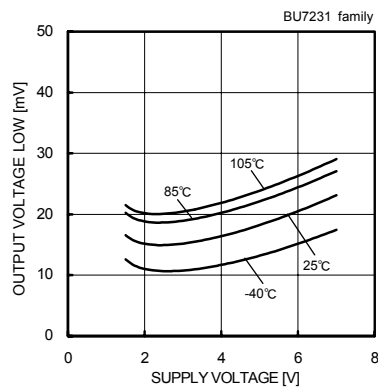


Fig.7
Output Voltage Low – Supply Voltage
($R_L=10[k\Omega]$)

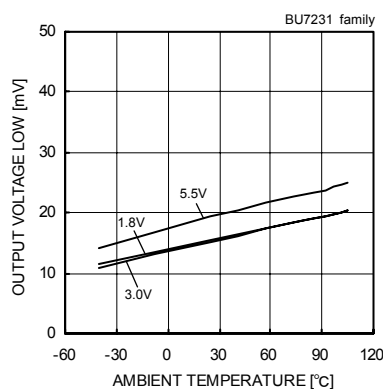


Fig.8
Output Voltage Low – Ambient Temperature
($R_L=10[k\Omega]$)

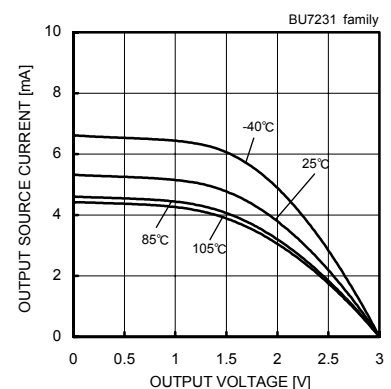


Fig.9
Output Source Current – Output Voltage
($V_{DD}=3[V]$)

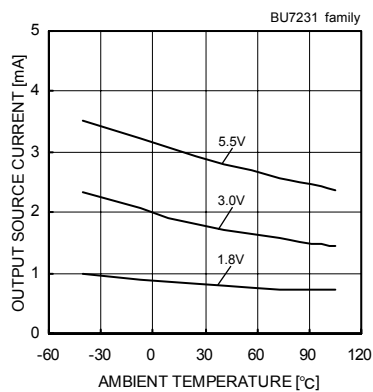


Fig.10
Output Source Current – Ambient Temperature
($V_{OUT}=V_{DD}-0.4[V]$)

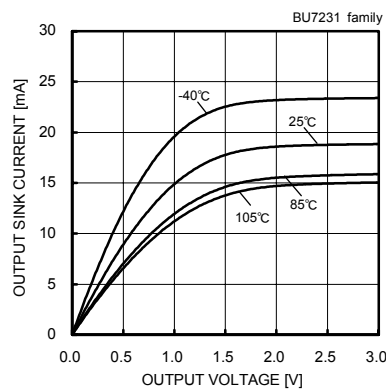


Fig.11
Output Sink Current – Output Voltage
($V_{DD}=3[V]$)

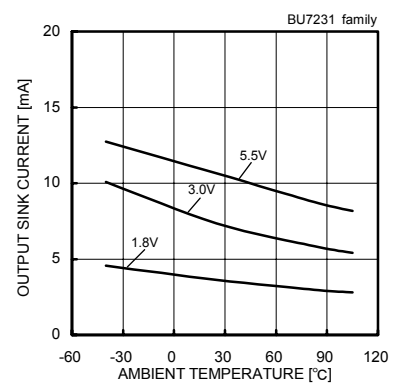


Fig.12
Output Sink Current – Ambient Temperature
($V_{OUT}=V_{SS}+0.4[V]$)

(*) The above data is ability value of sample, it is not guaranteed. BU7231G : $-40[^\circ\text{C}]$ to $+85[^\circ\text{C}]$ BU7231SG : $-40[^\circ\text{C}]$ to $+105[^\circ\text{C}]$

○BU7231 series

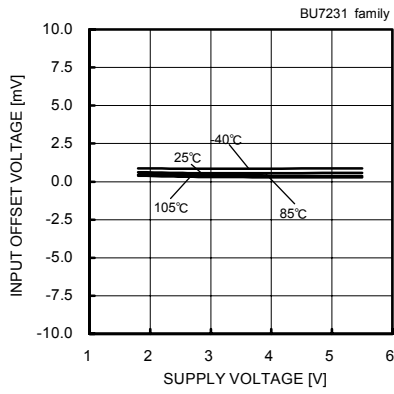


Fig.13
Input Offset Voltage – Supply Voltage
($V_{icm}=V_{DD}$, $V_{out}=0.1[V]$)

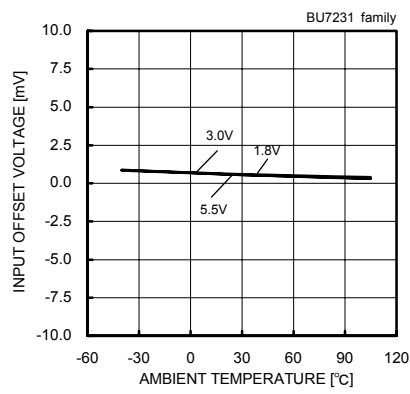


Fig.14
Input Offset Voltage – Ambient Temperature
($V_{icm}=V_{DD}$, $V_{out}=0.1[V]$)

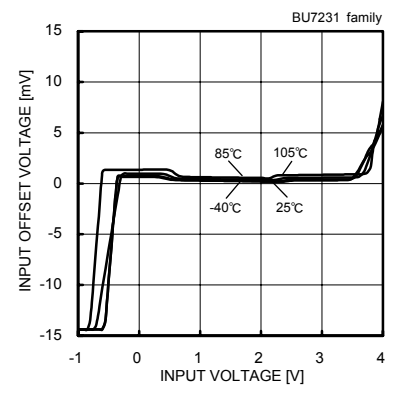


Fig.15
Input Offset Voltage – Input Voltage
($V_{DD}=3[V]$)

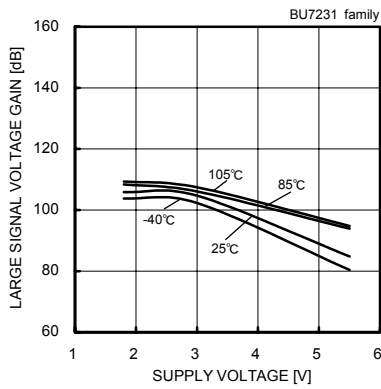


Fig.16
Large Signal Voltage Gain – Supply Voltage

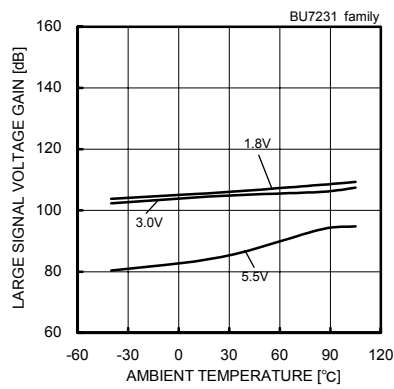


Fig.17
Large Signal Voltage Gain
– Ambient Temperature

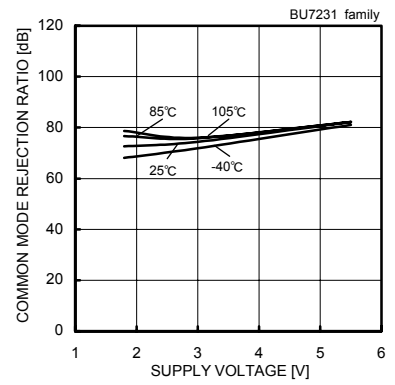


Fig.18
Common Mode Rejection Ratio
– Supply Voltage ($V_{DD}=3[V]$)

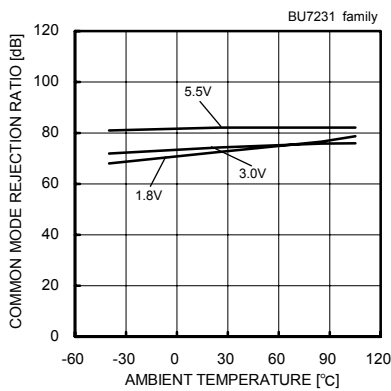


Fig.19
Common Mode Rejection Ratio
– Ambient Temperature ($V_{DD}=3[V]$)

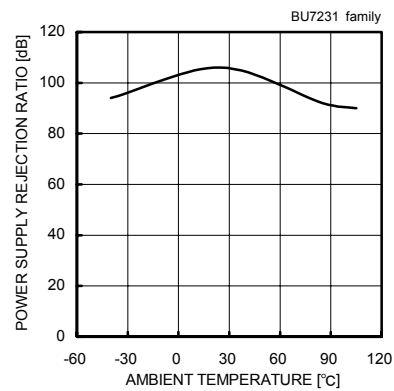


Fig.20
Power Supply Rejection Ratio
– Ambient Temperature

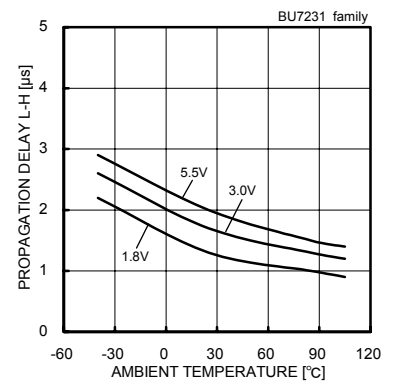


Fig.21
Propagation Delay L-H
– Ambient Temperature

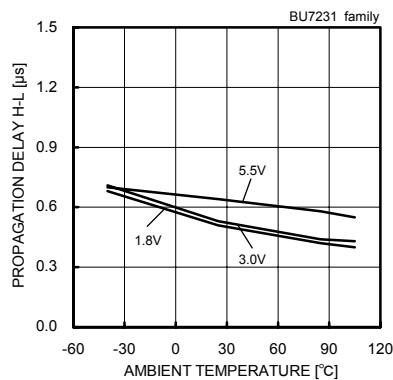


Fig.22
Propagation Delay H-L
– Ambient Temperature

(*) The above data is ability value of sample, it is not guaranteed. BU7231G : $-40[^{\circ}C]$ to $+85[^{\circ}C]$ BU7231SG : $-40[^{\circ}C]$ to $+105[^{\circ}C]$

○BU7232 family

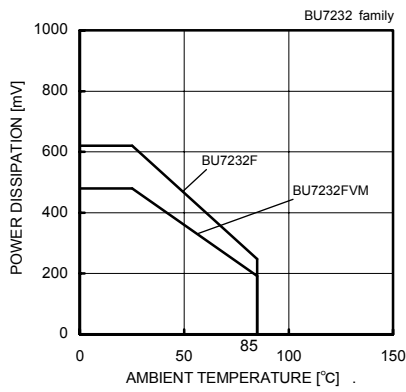


Fig.1
Derating Curve

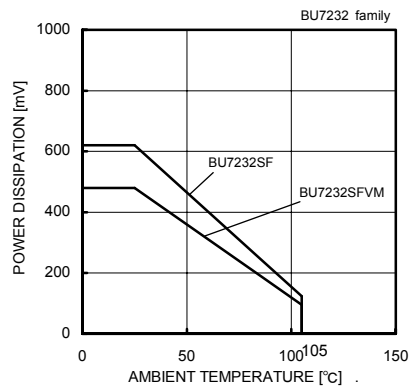


Fig.2
Derating Curve

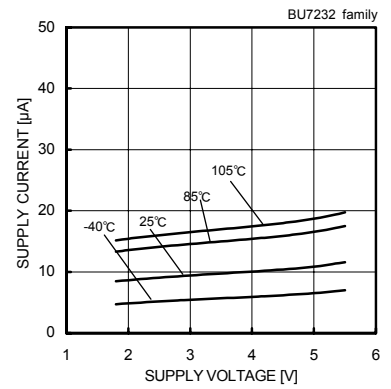


Fig.3
Supply Current – Supply Voltage

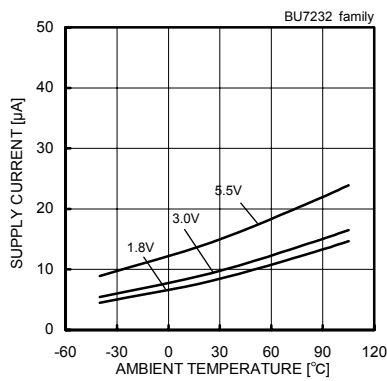


Fig.4
Supply Current – Ambient Temperature

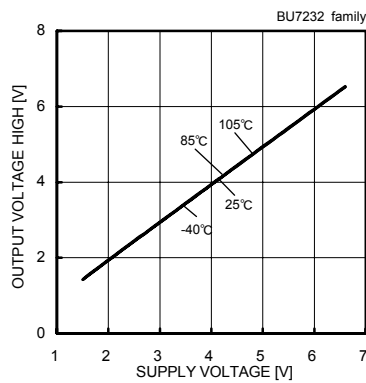


Fig.5
Output Voltage High – Supply Voltage
($R_L=10[k\Omega]$)

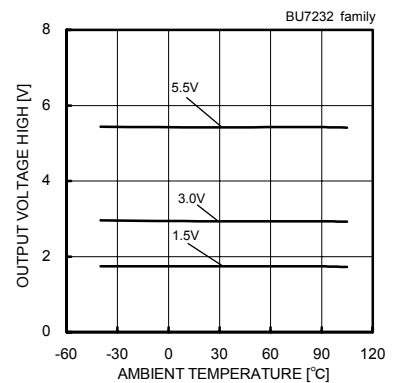


Fig.6
Output Voltage – Ambient Temperature
($R_L=10[k\Omega]$)

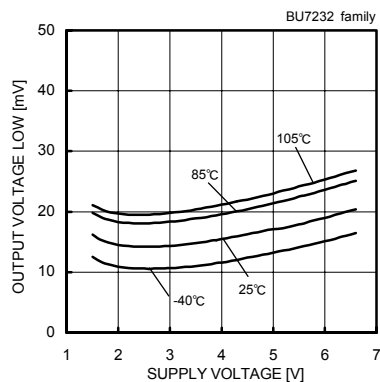


Fig.7
Output Voltage Low – Supply Voltage
($R_L=10[k\Omega]$)

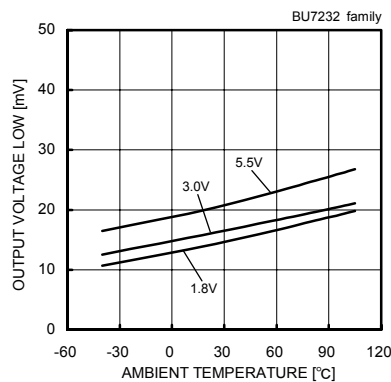


Fig.8
Output Voltage Low – Ambient temperature
($R_L=10[k\Omega]$)

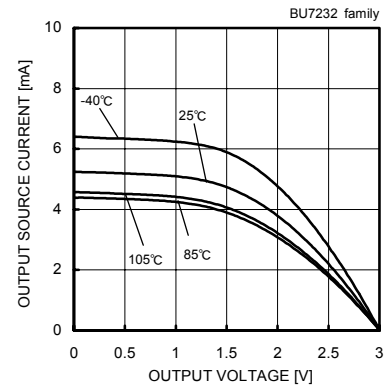


Fig.9
Output Source Current – Output Voltage

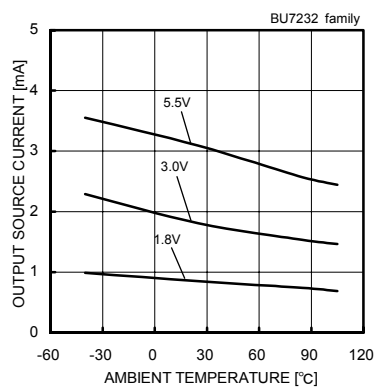


Fig.10
Output Source Current – Ambient Temperature
($V_{OUT}=V_{DD}-0.4[V]$)

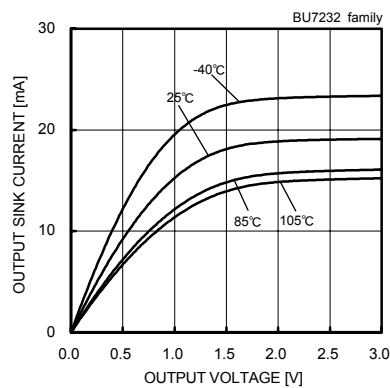


Fig.11
Output Sink Current – Output Voltage
($V_{DD}=3[V]$)

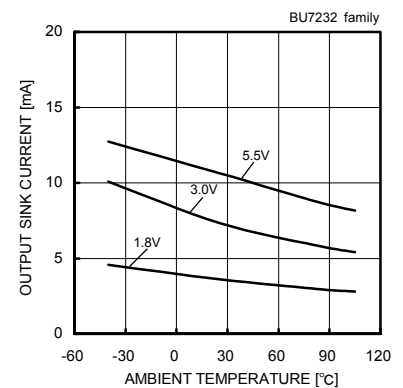


Fig.12
Output Sink Current – Ambient Temperature
($V_{OUT}=V_{SS}+0.4[V]$)

(*) The above data is ability value of sample, it is not guaranteed. BU7232 F/FVM : $-40[^\circ\text{C}]$ to $+85[^\circ\text{C}]$ BU7232S F/FVM : $-40[^\circ\text{C}]$ to $+105[^\circ\text{C}]$

○BU7232 family

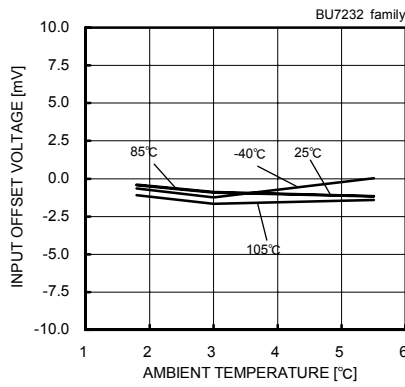


Fig.13
Input Offset Voltage – Ambient Temperature
($V_{icm}=V_{DD}$, $V_{OUT}=0.1[V]$)

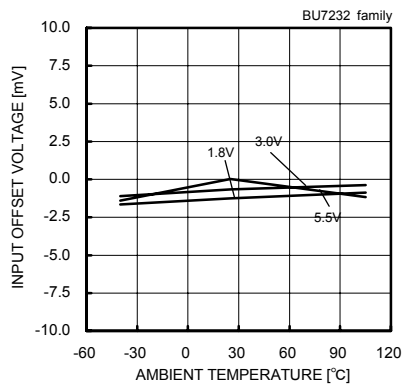


Fig.14
Input Offset Voltage – Ambient Temperature
($V_{icm}=V_{DD}$, $V_{OUT}=0.1[V]$)

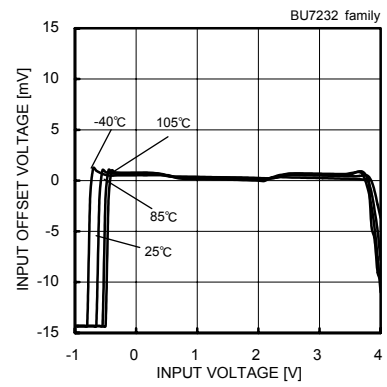


Fig.15
Input Offset Voltage – Input Voltage
($V_{DD}=3[V]$)

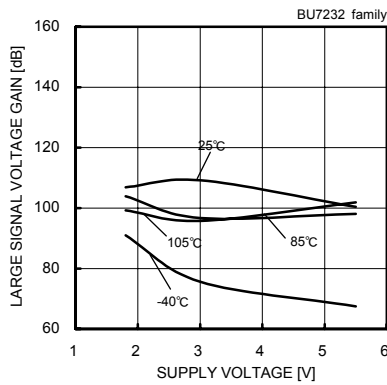


Fig.16
Large Signal Voltage Gain – Supply Voltage

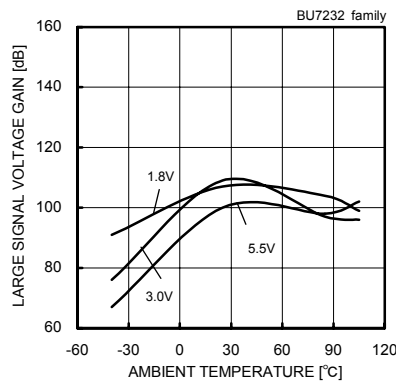


Fig.17
Large Signal Voltage Gain – Ambient Temperature

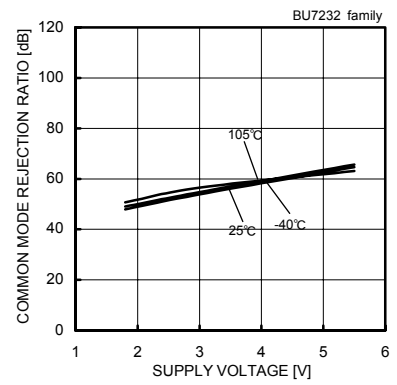


Fig.18
Common Mode Rejection Ratio – Supply Voltage
($V_{DD}=3[V]$)

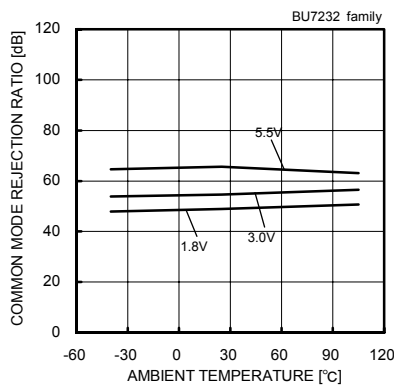


Fig.19
Common Mode Rejection Ratio – Ambient Temperature
($V_{DD}=3[V]$)

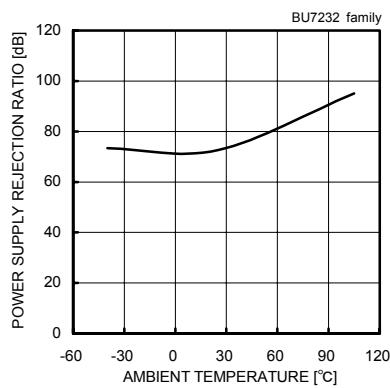


Fig.20
Power Supply Rejection Ratio – Ambient Temperature

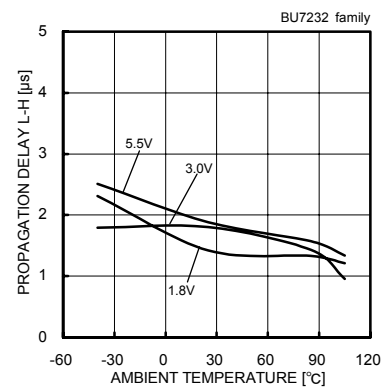


Fig.21
Propagation Delay L-H – Ambient temperature

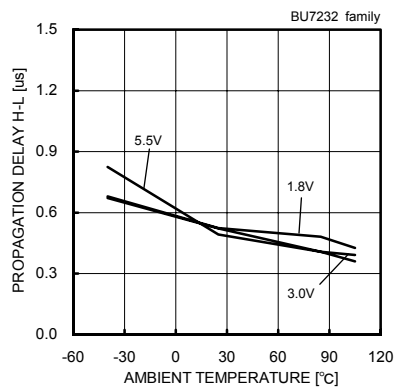


Fig.22
Propagation Delay H-L – Ambient Temperature

(*) The above data is ability value of sample, it is not guaranteed. BU7232 F/FVM : $-40[^\circ\text{C}]$ to $+85[^\circ\text{C}]$ BU7232S F/FVM : $-40[^\circ\text{C}]$ to $+105[^\circ\text{C}]$

● Schematic diagram

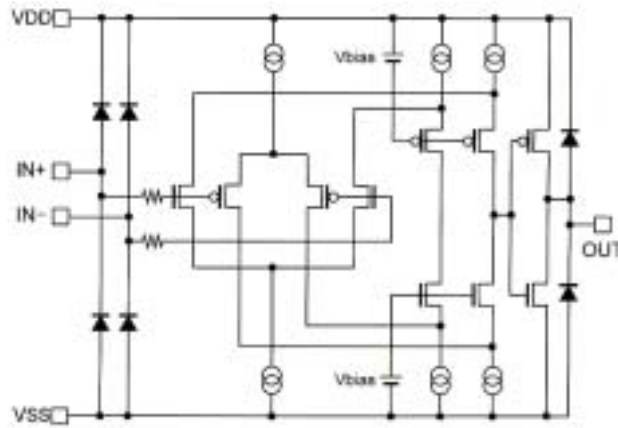


Fig.1 Simplified schematic

● Test circuit1 NULL method

VDD, VSS, EK, Vicm, Unit : [V]

Parameter	VF	S1	S2	S3					Calculation
					VDD	VSS	EK	Vicm	
Input offset voltage	VF1	ON	ON	OFF	3	0	-0.1	0.3	1
Large signal voltage gain	VF2	ON	ON	ON	3	0	-0.3	0.3	2
	VF3						-2.7		
Common-mode rejection ratio (Input common-mode voltage range)	VF4	ON	ON	OFF	3	0	-0.1	0	3
	VF5							3	
Power supply rejection ratio	VF6	ON	ON	OFF	1.8	0	-0.1	0.3	4
	VF7				5.5				

— Calculation —

1. Input offset Voltage (Vio)

$$V_{io} = \frac{|VF1|}{1+R_f/R_s} \text{ [V]}$$

2. Large signal voltage gain (Av)

$$A_v = 20\text{Log} \frac{2.4 \times (1+R_f/R_s)}{|VF2-VF3|} \text{ [dB]}$$

3. Common-mode rejection ratio (CMRR)

$$\text{CMRR} = 20\text{Log} \frac{3 \times (1+R_f/R_s)}{|VF4-VF5|} \text{ [dB]}$$

4. Power supply rejection ratio (PSRR)

$$\text{PSRR} = 20\text{Log} \frac{3.7 \times (1+R_f/R_s)}{|VF6-VF7|} \text{ [dB]}$$

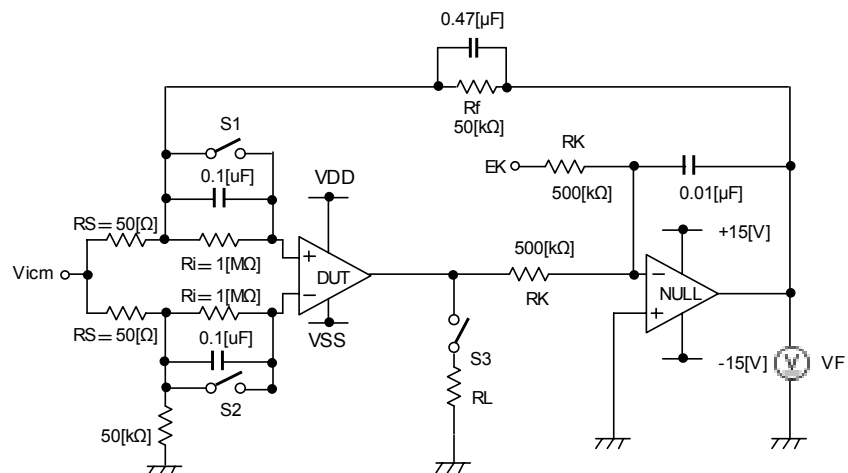


Fig.2 Test Circuit 1 (one channel only)

●Test circuit2 switch condition

Unit : [V]

SW No.	SW 1	SW 2	SW 3	SW 4	SW 5	SW 6	SW 7	SW 8
supply current	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF
maximum output voltage $R_L=10\text{ [k}\Omega\text{]}$	OFF	ON	ON	ON	OFF	OFF	ON	OFF
output current	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
response time	ON	OFF	ON	OFF	ON	OFF	OFF	ON

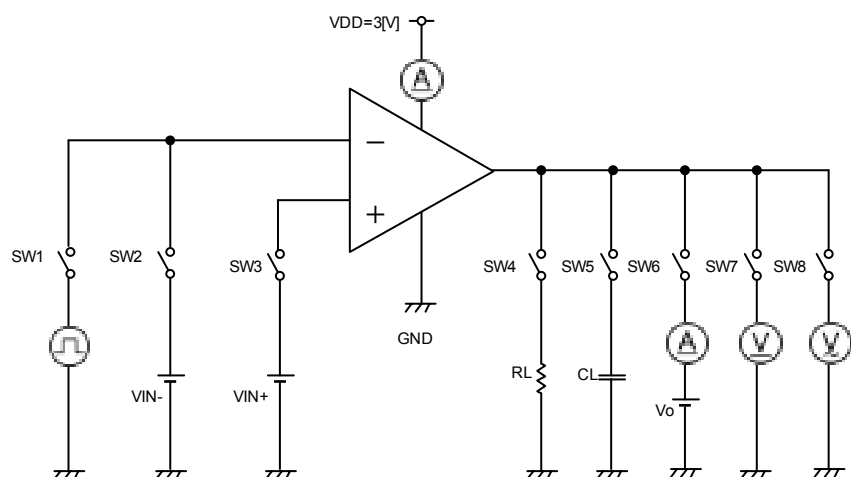


Fig3. Test circuit2 (one channel only)

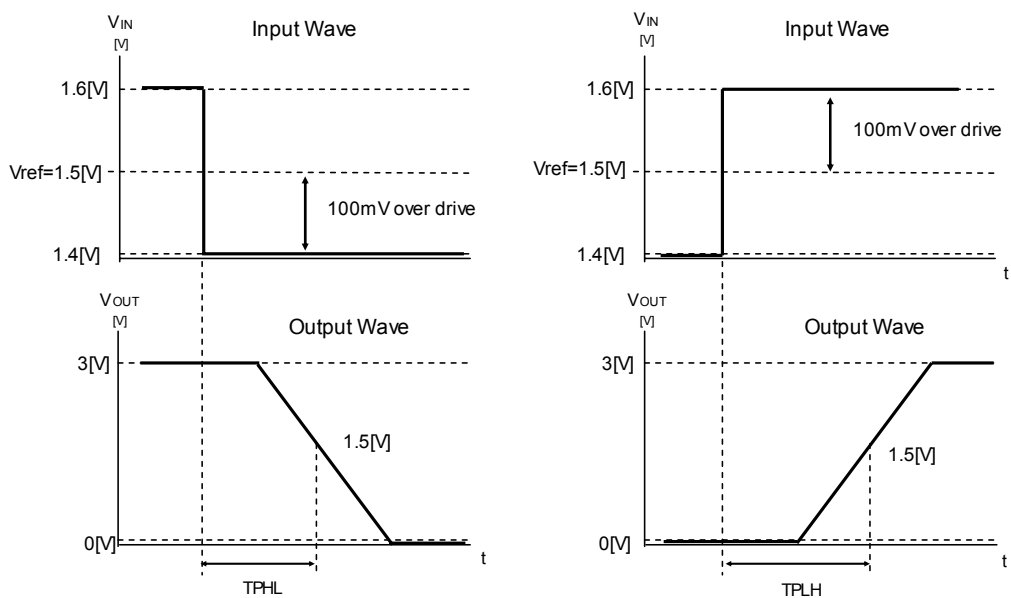


Fig4. Slew rate

● Description of electrical characteristics

Described here are the terms of electric characteristics used in this technical note. Items and symbols used are also shown.

Note that item name and symbol and their meaning may differ from those on another manufacture's document or general document.

1. Absolute maximum ratings

Absolute maximum rating item indicates the condition which must not be exceeded. Application of voltage in excess of absolute Maximum rating or use out of absolute maximum rated temperature environment may cause deterioration of characteristics.

- 1.1 Power supply voltage (VDD/VSS)
Indicates the maximum voltage that can be applied between the positive power supply terminal and negative power supply terminal without deterioration or destruction of characteristics of internal circuit.
- 1.2 Differential input voltage (Vid)
Indicates the maximum voltage that can be applied between non-inverting terminal and inverting terminal without deterioration and destruction of characteristics of IC.
- 1.3 Input common-mode voltage range (Vicm)
Indicates the maximum voltage that can be applied to non-inverting terminal and inverting terminal without deterioration or destruction of characteristics. Input common-mode voltage range of the maximum ratings not assure normal operation of IC. When normal operation of IC is desired, the input common-mode voltage of characteristics item must be followed.
- 1.4 Power dissipation (Pd)
Indicates the power that can be consumed by specified mounted board at the ambient temperature 25°C(normal temperature). As for package product, Pd is determined by the temperature that can be permitted by IC chip in the package (maximum junction temperature) and thermal resistance of the package

2. Electrical characteristics item

- 2.1 Input offset voltage (Vio)
Indicates the voltage difference between non-inverting terminal and inverting terminal. It can be translated into the input voltage difference required for setting the output voltage at 0 [V]
- 2.2 Input offset current (Iio)
Indicates the difference of input bias current between non-inverting terminal and inverting terminal.
- 2.3 Input bias current (Ib)
Indicates the current that flows into or out of the input terminal. It is defined by the average of input bias current at non-inverting terminal and input bias current at inverting terminal.
- 2.4 Input common-mode voltage range (Vicm)
Indicates the input voltage range where IC operates normally.
- 2.5 Large signal voltage gain (AV)
Indicates the amplifying rate (gain) of output voltage against the voltage difference between non-inverting terminal and inverting terminal.
It is normally the amplifying rate (gain) with reference to DC voltage.
$$A_v = (\text{Output voltage fluctuation}) / (\text{Input offset fluctuation})$$
- 2.6 Circuit current (ICC)
Indicates the IC current that flows under specified conditions and no-load steady status.
- 2.7 Output sink current (OL)
Indicates the maximum current that can be output under specified output condition (such as output voltage and load condition).
- 2.8 Output saturation voltage, Low level output voltage (VOL)
Indicates the voltage range that can be output under specified load conditions.
- 2.9 Output leakage current, High level output current (Ileak)
Indicates the current that flows into IC under specified input and output conditions.
- 2.10 Response Time (Tre)
The interval between the application of an input and output condition.
- 2.11 Common-mode rejection ratio (CMRR)
Indicates the ratio of fluctuation of input offset voltage when in-phase input voltage is changed. It is normally the fluctuation of DC.
$$CMRR = (\text{Change of Input common-mode voltage}) / (\text{Input offset fluctuation})$$
- 2.12 Power supply rejection ratio (PSRR)
Indicates the ratio of fluctuation of input offset voltage when supply voltage is changed. It is normally the fluctuation of DC.
$$PSRR = (\text{Change of power supply voltage}) / (\text{Input offset fluctuation})$$

● Derating curve

Power dissipation (total loss) indicates the power that can be consumed by IC at $T_a=25^{\circ}\text{C}$ (normal temperature). IC is heated when it consumed power, and the temperature of IC chip becomes higher than ambient temperature. The temperature that can be accepted by IC chip depends on circuit configuration, manufacturing process, and consumable power is limited. Power dissipation is determined by the temperature allowed in IC chip (maximum junction temperature) and thermal resistance of package (heat dissipation capability). The maximum junction temperature is typically equal to the maximum value in the storage temperature range. Heat generated by consumed power of IC radiates from the mold resin or lead frame of the package. The parameter which indicates this heat dissipation capability (hardness of heat release) is called thermal resistance, represented by the symbol $\theta_{j-a} [^{\circ}\text{C}/\text{W}]$. The temperature of IC inside the package can be estimated by this thermal resistance. Fig.6 (a) shows the model of thermal resistance of the package. Thermal resistance θ_{ja} , ambient temperature T_a , junction temperature T_j , and power dissipation P_d can be calculated by the equation below :

$$\theta_{ja} = (T_j - T_a) / P_d \quad [^{\circ}\text{C}/\text{W}] \quad \dots \dots (1)$$

Derating curve in Fig.6 (b) indicates power that can be consumed by IC with reference to ambient temperature. Power that can be consumed by IC begins to attenuate at certain ambient temperature. This gradient is determined by thermal resistance θ_{ja} . Thermal resistance θ_{ja} depends on chip size, power consumption, package, ambient temperature, package condition, wind velocity, etc even when the same of package is used. Thermal reduction curve indicates a reference value measured at a specified condition. Fig7(c)-(f) show a derating curve for an example of BU7251family, BU7252 family, BU7231 family, BU7232 family.



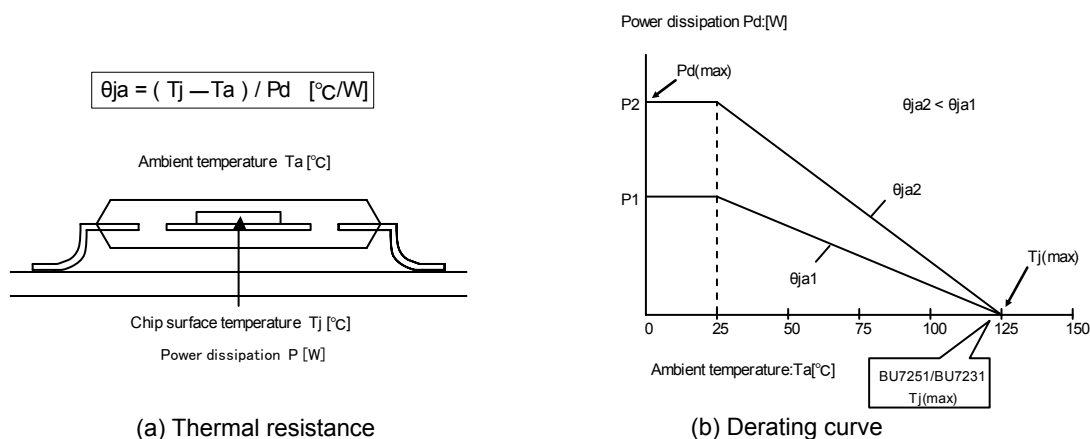



Fig6. Thermal resistance and power dissipation

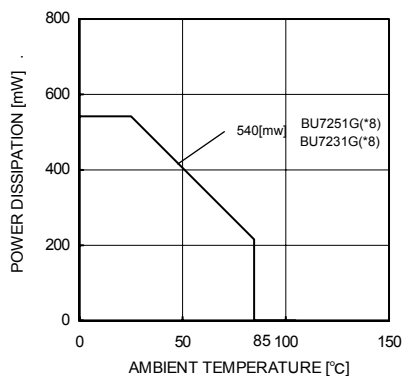


(c) BU7251G BU7231G

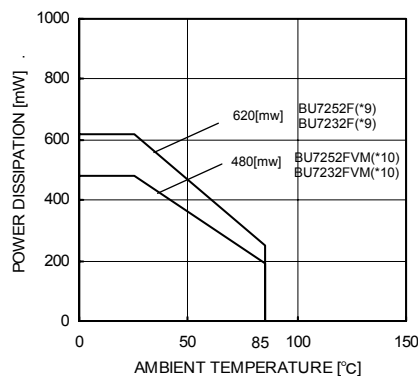

(d) BU7252F/FVM BU7232F/FVM

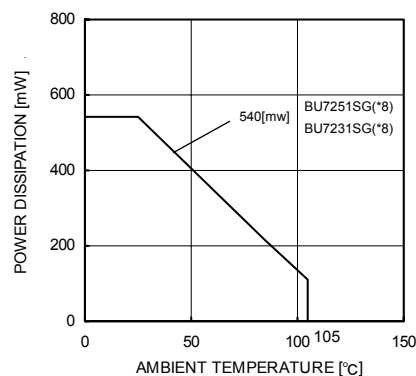

(e) BU7251SG BU7231SG

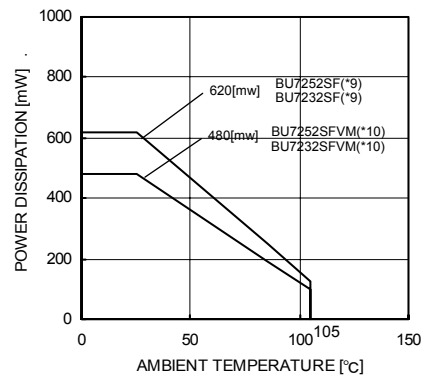

(f) BU7252S F/FVM BU72432S F/FVM

(*8)	(*9)	(*10)	Unit
5.4	6.2	4.8	[mW/°C]

When using the unit above $T_a=25^{\circ}\text{C}$, subtract the value above per degree $^{\circ}\text{C}$. Permissible dissipation is the value when FR4 glass epoxy board $70[\text{mm}] \times 70[\text{mm}] \times 1.6[\text{mm}]$ (copper foil area below 3[%]) is mounted.

Fig7. Derating curve

● Cautions on use

1) Absolute maximum ratings

Absolute maximum ratings are the values which indicate the limits, within which the given voltage range can be safely charged to the terminal. However, it does not guarantee the circuit operation.

2) Applied voltage to the input terminal

For normal circuit operation of voltage comparator, please input voltage for its input terminal within input common mode voltage $V_{DD}+0.3[V]$. Then, regardless of power supply voltage, $V_{SS}-0.3[V]$ can be applied to input terminals without deterioration or destruction of its characteristics.

3) Operating power supply (split power supply/single power supply)

The voltage comparator operates if a given level of voltage is applied between V_{DD} and V_{SS} . Therefore, the operational amplifier can be operated under single power supply or split power supply.

4) Power dissipation (pd)

If the IC is used under excessive power dissipation. An increase in the chip temperature will cause deterioration of the radical characteristics of IC. For example, reduction of current capability. Take consideration of the effective power dissipation and thermal design with a sufficient margin. Pd is reference to the provided power dissipation curve.

5) Short circuits between pins and incorrect mounting

Short circuits between pins and incorrect mounting when mounting the IC on a printed circuits board, take notice of the direction and positioning of the IC. If IC is mounted erroneously, It may be damaged. Also, when a foreign object is inserted between output, between output and V_{DD} terminal or V_{SS} terminal which causes short circuit, the IC may be damaged.

6) Using under strong electromagnetic field

Be careful when using the IC under strong electromagnetic field because it may malfunction.

7) Usage of IC

When stress is applied to the IC through warp of the printed circuit board, The characteristics may fluctuate due to the piezo effect. Be careful of the warp of the printed circuit board.

8) Testing IC on the set board

When testing IC on the set board, in cases where the capacitor is connected to the low impedance, make sure to discharge per fabrication because there is a possibility that IC may be damaged by stress. When removing IC from the set board, it is essential to cut supply voltage. As a countermeasure against the static electricity, observe proper grounding during fabrication process and take due care when carrying and storage it.

9) The IC destruction caused by capacitive load

The transistors in circuits may be damaged when V_{DD} terminal and V_{SS} terminal is shorted with the charged output terminal capacitor. When IC is used as a operational amplifier or as an application circuit, where oscillation is not activated by an output capacitor, the output capacitor must be kept below $0.1[\mu F]$ in order to prevent the damage mentioned above.


10) Decoupling capacitor

Insert the decoupling capacitance between V_{DD} and V_{SS} , for stable operation of operational amplifier.

11) Latch up


Be careful of input voltage that exceed the V_{DD} and V_{SS} . When CMOS device have sometimes occur latch up operation. And protect the IC from abnormaly noise

● Dimensions

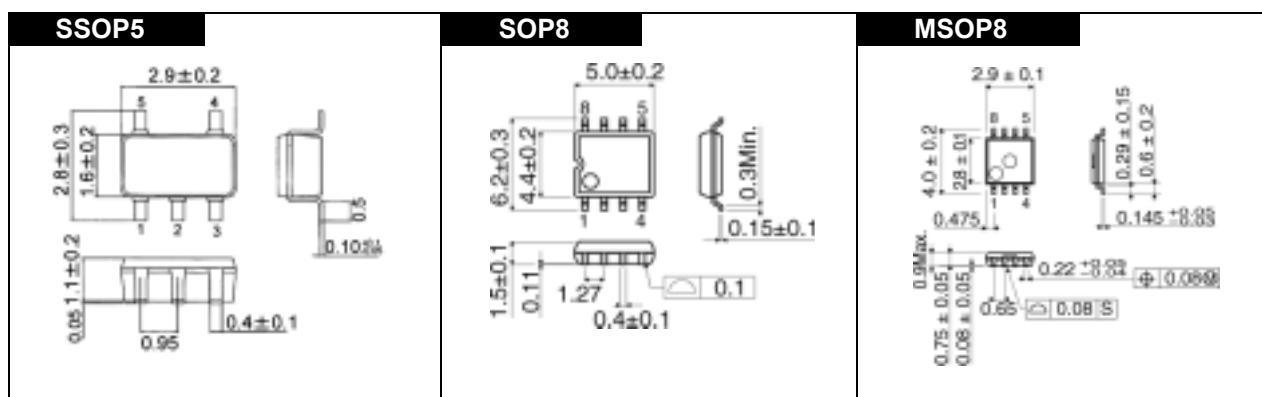

● Model number construction

- Specify the product by the model number when placing an order.
- Make sure of the combinations of items.
- Start with the leftmost space without leaving any empty space between characters.

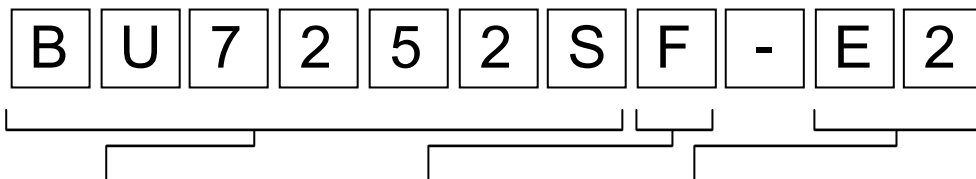

ROHM

- BU7251 BU7251S
- BU7231 BU7231S
- BU7252 BU7252S
- BU7232 BU7232S

Package type

- G : SSOP5
- F : SOP8
- FVM : MSOP8

- E2 Embossed tape on reel with pin 1 near far when pulled out
- TR Embossed tape on reel with pin 1 near far when pulled out

Packing specification reference

Package	Packing specification name	Quantity	Embossed carrier tape
SSOP5	TR	3000	
SOP8	E2	2500	
MSOP8	TR	3000	

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp