


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(k)	R2(k)
KRA116	1	10
KRA117	2.2	2.2
KRA118	2.2	10
KRA119	4.7	10
KRA120	10	4.7
KRA121	47	10
KRA122	100	100

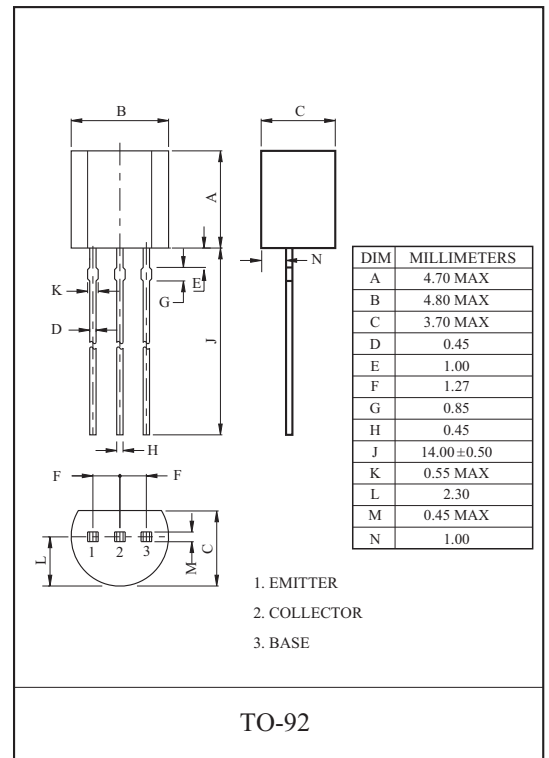

MAXIMUM RATING (Ta=25)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRA116 122	V _O	-50	V
Input Voltage	KRA116	V _I	-10, 5	V
	KRA117		-12, 10	
	KRA118		-12, 5	
	KRA119		-20, 7	
	KRA120		-30, 10	
	KRA121		-40, 15	
	KRA122		-40, 10	
Output Current	KRA116 122	I _O	-100	mA
Power Dissipation		P _D	625	mW
Junction Temperature		T _j	150	
Storage Temperature Range		T _{stg}	-55 150	

KRA116~KRA122

ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRA116 122	$I_{O(OFF)}$	$V_O=-50V, V_I=0$	-	-	-500	nA
DC Current Gain	KRA116	G_1	$V_O=-5V, I_O=-5mA$	33	-	-	
	KRA117		$V_O=-5V, I_O=-20mA$	20	-	-	
	KRA118		$V_O=-5V, I_O=-10mA$	33	-	-	
	KRA119		$V_O=-5V, I_O=-10mA$	30	-	-	
	KRA120		$V_O=-5V, I_O=-10mA$	24	-	-	
	KRA121		$V_O=-5V, I_O=-5mA$	33	-	-	
	KRA122		$V_O=-5V, I_O=-5mA$	62	-	-	
Output Voltage	KRA116	$V_{O(ON)}$	$I_O=-10mA, I_I=-0.5mA$	-	-	-0.3	V
	KRA117		$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	
	KRA118		$I_O=-10mA, I_I=-0.5mA$	-	-	-0.3	
	KRA119		$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	
	KRA120		$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	
	KRA121		$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	
	KRA122		$I_O=-5mA, I_I=-0.25mA$	-	-0.1	-0.3	
Input Voltage (ON)	KRA116	$V_{I(ON)}$	$V_O=-0.3V, I_O=-20mA$	-	-0.98	-3	V
	KRA117		$V_O=-0.3V, I_O=-20mA$	-	-1.83	-3	
	KRA118		$V_O=-0.3V, I_O=-20mA$	-	-1.22	-3	
	KRA119		$V_O=-0.3V, I_O=-20mA$	-	-1.76	-2.5	
	KRA120		$V_O=-0.3V, I_O=-2mA$	-	-2	-3	
	KRA121		$V_O=-0.3V, I_O=-2mA$	-	-3.9	-5	
	KRA122		$V_O=-0.3V, I_O=-1mA$	-	-1.64	-3	
Input Voltage (OFF)	KRA116	$V_{I(OFF)}$	$V_{CC}=-5V, I_O=-100\mu A$	-0.3	-0.63	-	V
	KRA117			-0.5	-1.15	-	
	KRA118			-0.3	-0.67	-	
	KRA119			-0.3	-0.82	-	
	KRA120			-0.8	-1.68	-	
	KRA121			-1	-3.09	-	
	KRA122			-0.5	-1.17	-	
Transition Frequency	KRA116 122	f_T^*	$V_O=-10V, I_O=-5mA$	-	250	-	MHz
Input Current	KRA116	I_I	$V_I=-5V$	-	-	-7.2	mA
	KRA117			-	-	-3.8	
	KRA118			-	-	-3.8	
	KRA119			-	-	-1.8	
	KRA120			-	-	-0.88	
	KRA121			-	-	-0.16	
	KRA122			-	-	-0.15	
Input Resistor	KRA116	R1	-	0.7	1	1.3	k
	KRA117			1.54	2.2	2.86	
	KRA118			1.54	2.2	2.86	
	KRA119			3.29	4.7	6.11	
	KRA120			7	10	13	
	KRA121			32.9	47	61.1	
	KRA122			70	100	130	
Resistor Ratio	KRA116	R2/R1	-	8	10	12	
	KRA117			0.8	1.0	1.2	
	KRA118			3.6	4.5	5.5	
	KRA119			1.7	2.1	2.6	
	KRA120			0.37	0.47	0.57	
	KRA121			0.17	0.21	0.26	
	KRA122			0.8	1.0	1.2	







Note : * Characteristic of Transistor Only.

KRA116~KRA122







ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Switching Time	Rise Time	KRA116M	$V_O = -5V$ $V_{IN} = -5V$ $R_L = 1k$	-	0.01	-	μs	
		KRA117M		-	0.03	-		
		KRA118M		-	0.02	-		
		KRA119M		t_r	-	0.05		-
		KRA120M		-	0.12	-		
		KRA121M		-	0.30	-		
		KRA122M		-	0.35	-		
	Storage Time	KRA116M		t_{stg}	-	3		-
		KRA117M			-	2		-
		KRA118M			-	3		-
		KRA119M			-	3		-
		KRA120M			-	2		-
		KRA121M			-	2		-
		KRA122M			-	2		-
	Fall Time	KRA116M		t_f	-	0.1		-
		KRA117M			-	0.19		-
		KRA118M			-	0.1		-
		KRA119M			-	0.36		-
		KRA120M			-	0.35		-
		KRA121M			-	0.5		-
		KRA122M			-	0.7		-







KRA116~KRA122

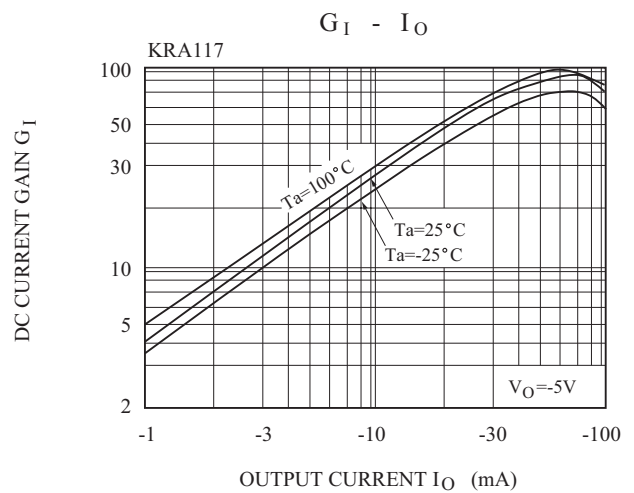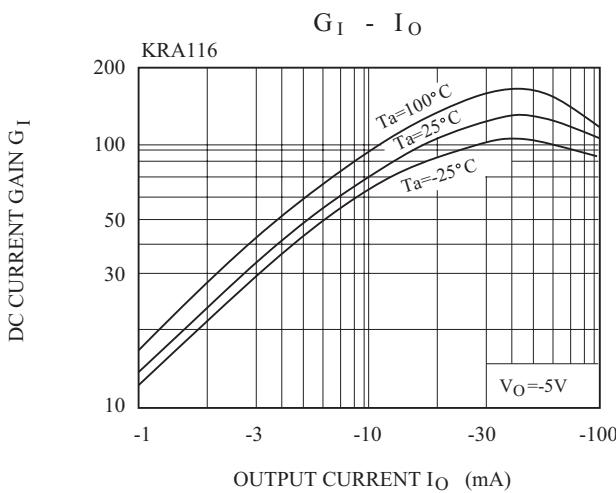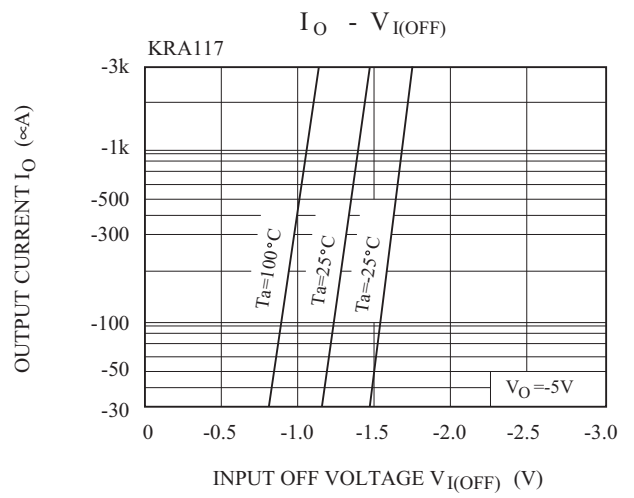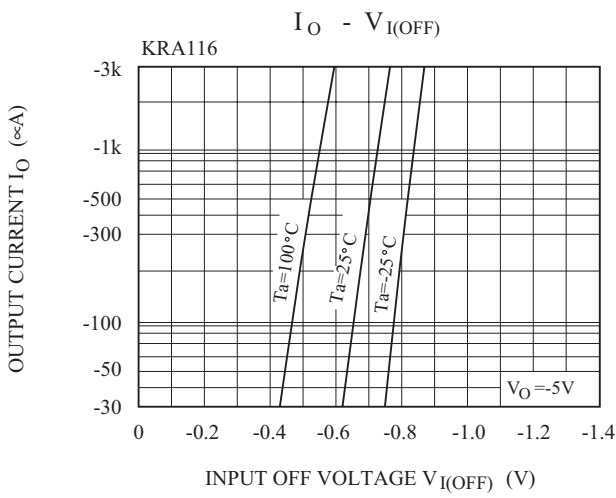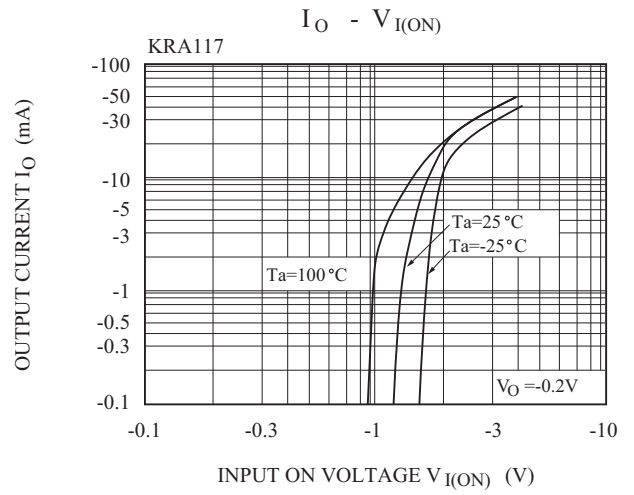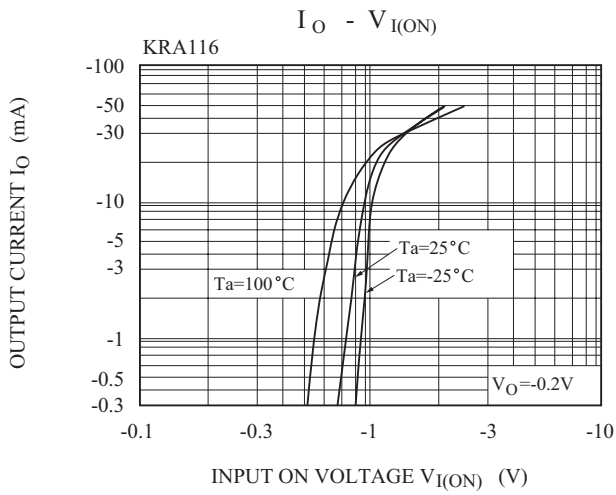

KRA116~KRA122

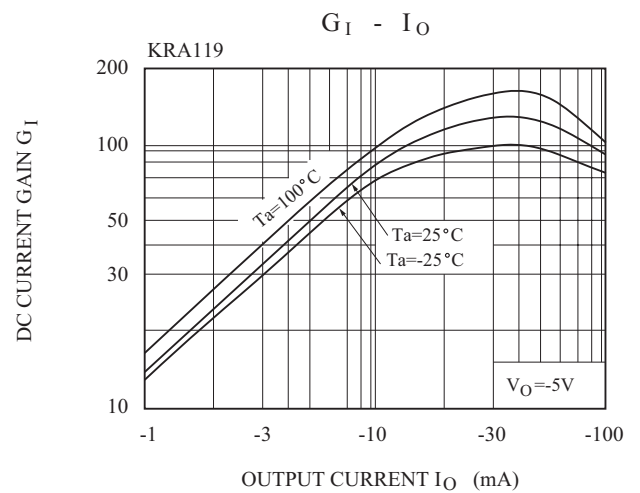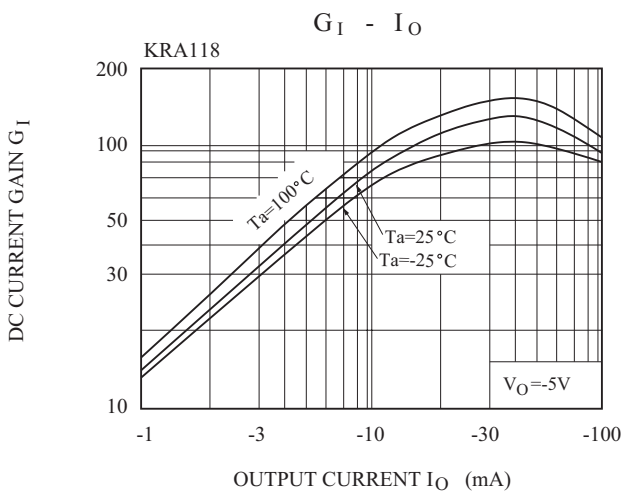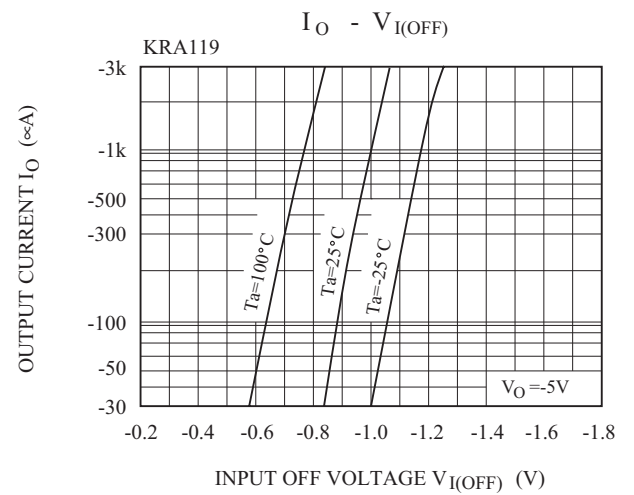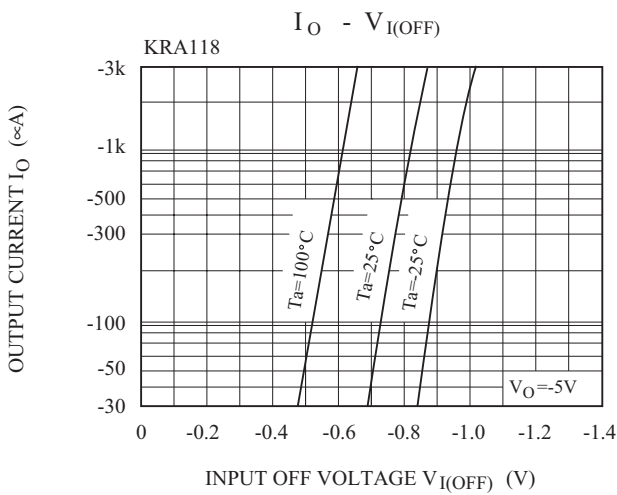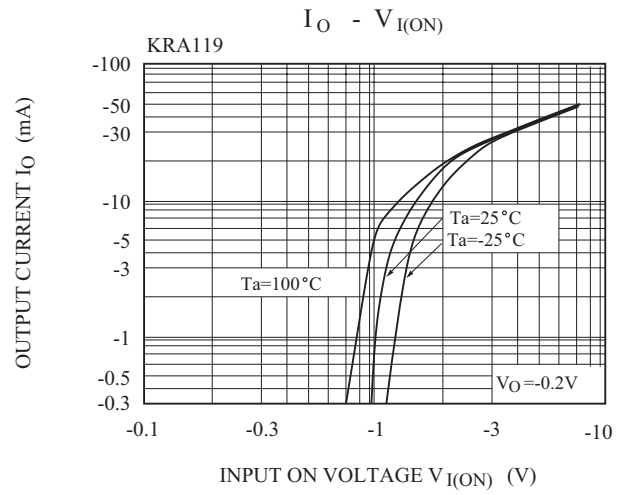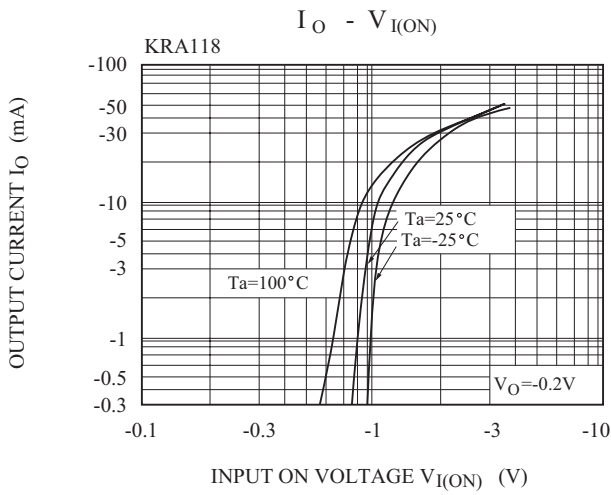

KRA116~KRA122

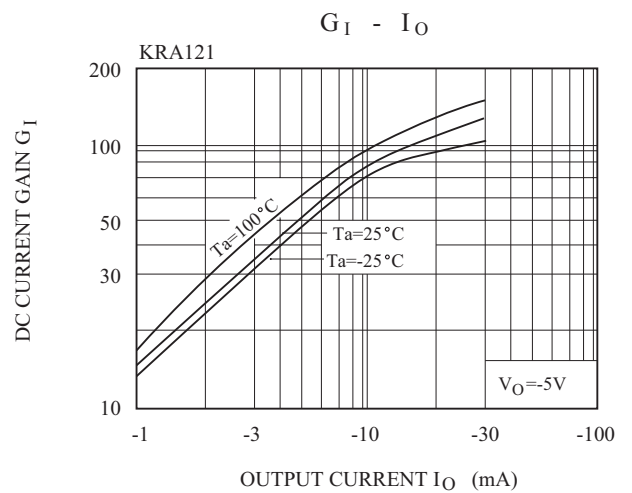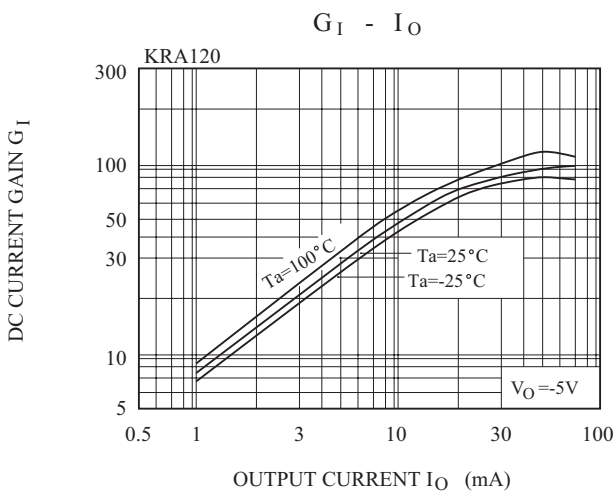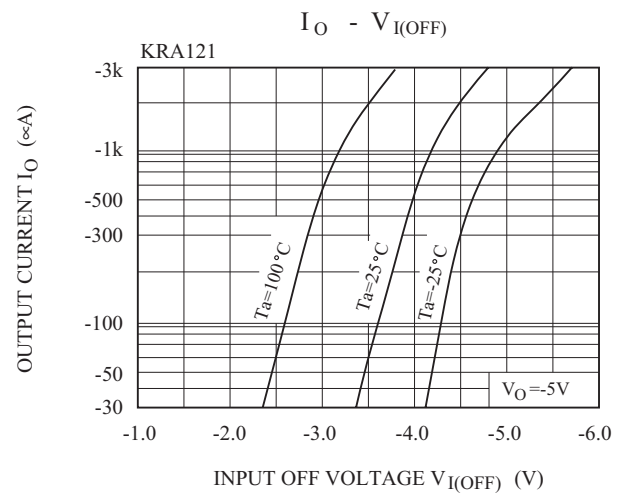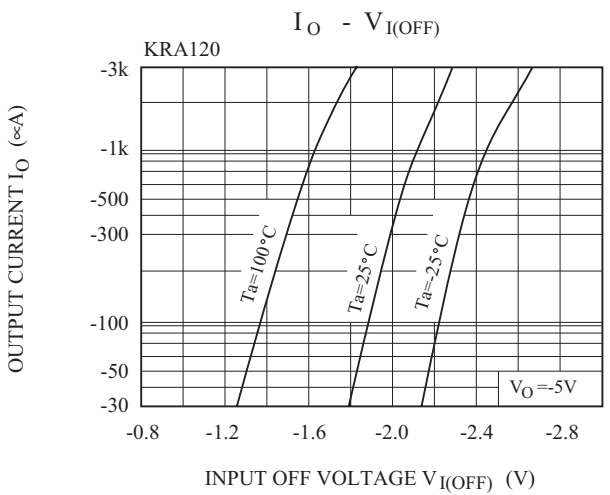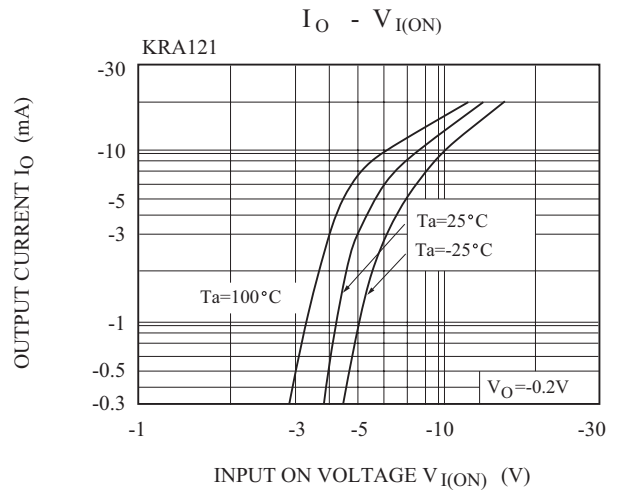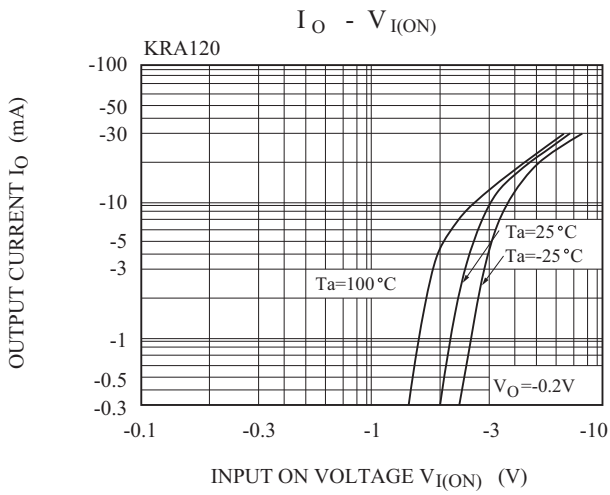

KRA116~KRA122

