

The EL - 1KL3 and 1KL5 are high - power GaAs IREDS mounted in durable, hermetically sealed TO - 18 metal can package, which provides years of reliable performance even under demanding conditions such as use outdoors.

FEATURES


- Narrow beam angle
- Durable
- High reliability in demanding environments

APPLICATIONS

- Optical emitters
- Optical switches
- Encoders
- Smoke sensors

DIMENSIONS

(Unit : mm)

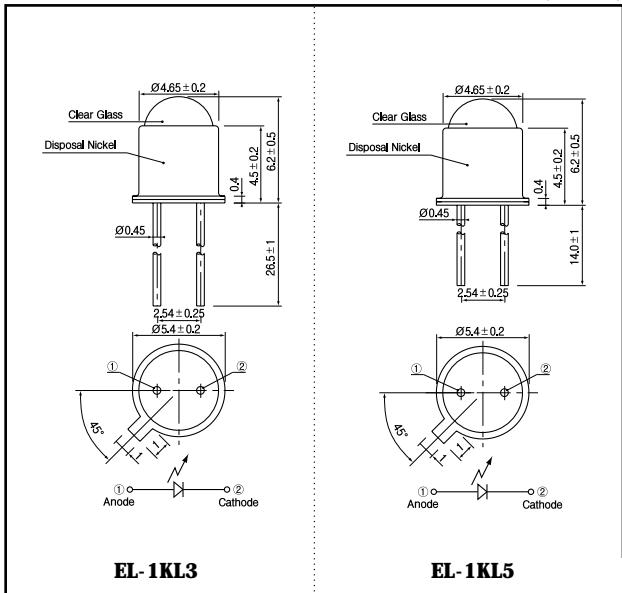

MAXIMUM RATINGS

(Ta=25 °C)

Item	Symbol	Rating	Unit
Reverse voltage	V _R	5	V
Forward current	I _F	100	mA
Pulse forward current ^{*1}	I _{FP}	1	A
Power dissipation	P _C	170	mW
Operating temp.	T _{opr.}	- 40 ~ + 100	
Storage temp.	T _{stg.}	- 55 ~ + 125	
Soldering temp. ^{*2}	T _{sol.}	260	

^{*1}. pulse width : tw 100 μ sec. period : T=10msec.

^{*2}. For MAX.5 seconds at the position of 2 mm from the package

ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 °C)

Item	Symbol	Conditions	EL - 1KL3			EL - 1KL5			Unit.
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V _F	I _F =100mA		1.35	1.7		1.35	1.7	V
Reverse current	I _R	V _R =5V			10			10	μA
Capacitance	C _t	f=1MHz		25			25		pF
Radiant intensity	P _O	I _F =100mA		15			10		mW/sr
Peak emission wavelength	λ	I _F =100mA		940			940		nm
Spectral bandwidth 50%		I _F =100mA		50			50		nm
Half angle				± 8			± 5		deg.


Infrared Emitting Diodes(GaAs)

EL - 1KL3 · EL - 1KL5


**Power dissipation Vs.
Ambient temperature**

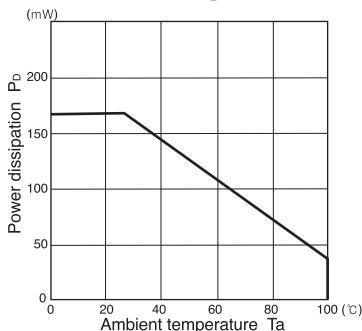


**Radiant intensity Vs.
Forward current**

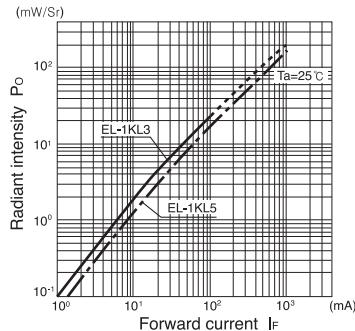


**Relative radiant intensity Vs.
Ambient temperature**

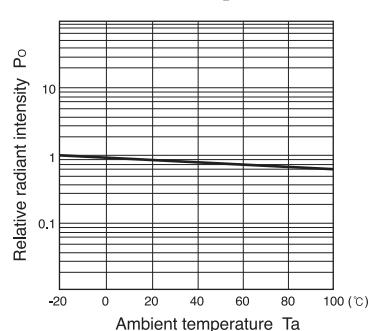


**Relative intensity Vs.
Wavelength**

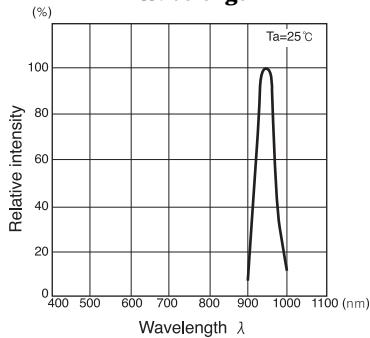


**Forward current Vs.
Forward voltage**

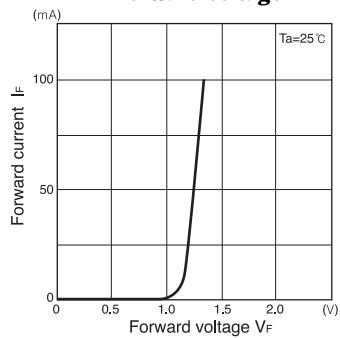

Radiant Pattern

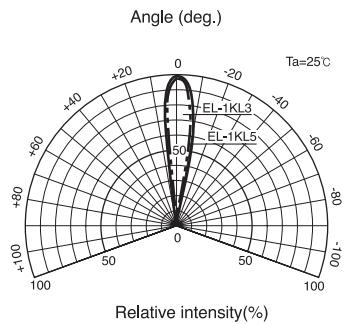

**Relative radiant intensity Vs.
Distance**

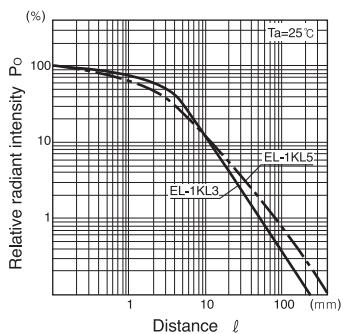

Relative radiant intensity Vs.
Distance test method

