

**KSM-90□TM1Y**

The KSM-90□TM1Y consist of a PIN Photodiode of high speed and a preamplifier IC in the package as an receiver for Infrared remote control systems

**Features**

- Wide angle design
- Wide supply-voltage range : 2.7V to 5.5V
- Shielded against electrical field disturbance
- High immunity against ambient light disturbances  
(Logic Controller Adaptation)
- Available for carrier frequencies between 32.7KHz to 56.9KHz
- TTL and CMOS compatible


**Applications**

- Audio & Video Applications (TV, VTR, Audio, DVDP, CDP)
- Home Appliances (Air conditioner, Computer, Camcoder)
- Wireless Toys
- Remote Control Equipment

**Maximum Ratings**

[Ta=25°C]

Parameter	Symbol	Ratings	Unit
Supply Voltage	Vcc	6.0	V
Operating Temperature	Topr	-10 ~ +60	°C
Storage Temperature	Tstg	-20 ~ +75	°C
Soldering Temperature	Tsol	260 (Max 5 sec)	°C

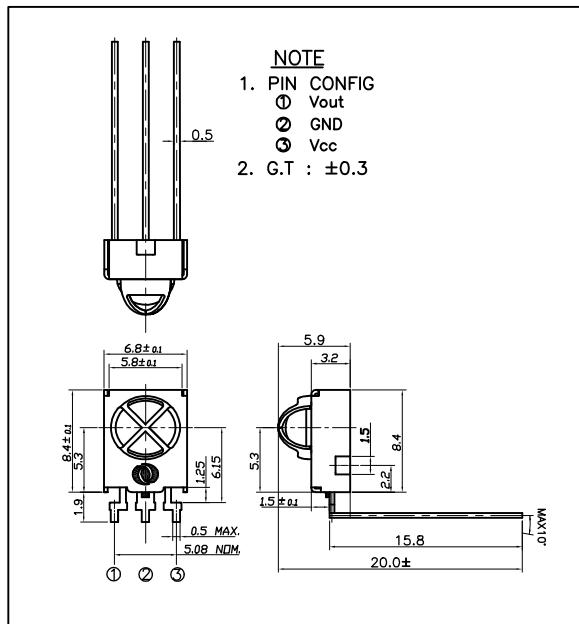**DIMENSIONS****B.P.F Center Frequency**

Model No.	B.P.F Center Frequency(kHz)
KSM-901TM1Y	40.0
KSM-902TM1Y	36.7
KSM-903TM1Y	37.9
KSM-904TM1Y	32.7
KSM-905TM1Y	56.9

**Electro-Optical Characteristics**

[Ta=25°C, Vcc=5.0V(Vcc=3.0V)]

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Recommended Supply Voltage	Vcc		2.7	-	5.5	V
Current Consumption	Icc	No signal input	-	1.0	1.2	mA
Peak Wavelength *1	λ p		-	940	-	nm
B.P.F Center Frequency	fo		-	37.9	-	kHz
Transmission Distance *1	L	250±50lx	0 °	12	-	m
			±30 °	10	-	
High level Output voltage *1	V <sub>OH</sub>	30cm over	4.5(2.8)	5.0(3.0)	-	V
Low level Output voltage *1	V <sub>OL</sub>	the ray axis	-	0.1	0.5	V
High level Output Pulse Width *1	T <sub>WH</sub>	Burst wave=600μs	400	600	700	μs
Low level Output Pulse Width *1	T <sub>WL</sub>	Period = 1.2ms	500	600	800	μs
Output Form			Active Low Output			

\*1. It specifies the maximum distance between emitter and detector that the output wave form satisfies the standard under the conditions below against the standard transmitter.


1) Measuring place : Indoor without extreme reflection of light

2) Ambient light source : Detecting surface illumination shall be irradiate 200±50lx under ordinary white fluorescence lamp without high frequency lightning




3) Standard transmitter : Burst wave of standard transmitter shall be arranged to 50mVP-P under the measuring circuit

**KSM-90□TM1Y**


## ■ Measuring Method [Ta=25°C]

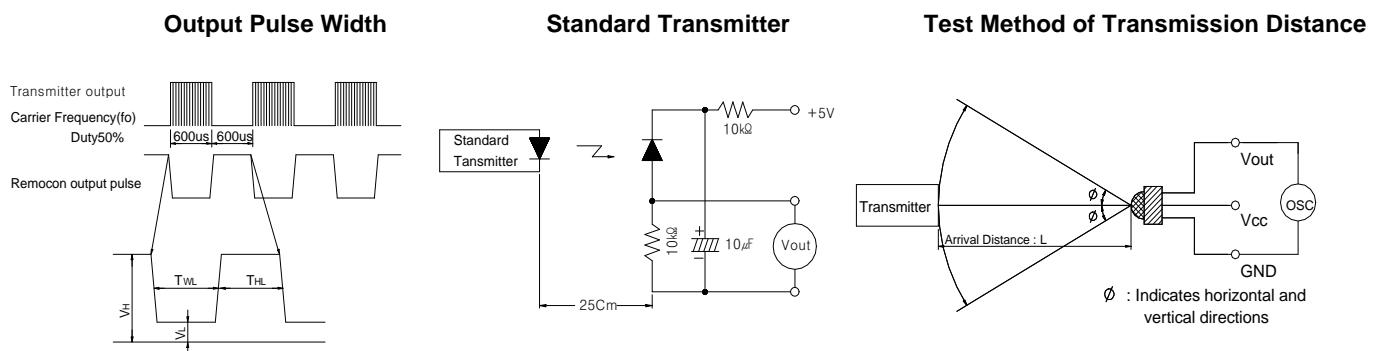

## ■ Typical Characteristics Curve [Ta=25°C]

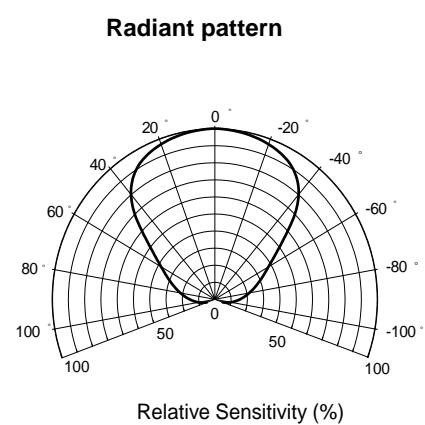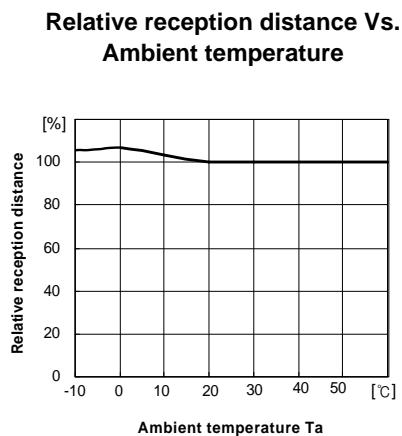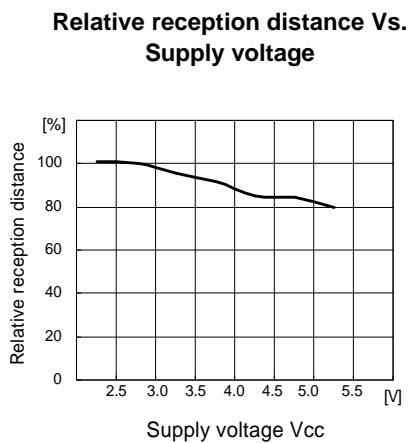

## ■ Standard Application Circuit with R-C Decoupling Filter

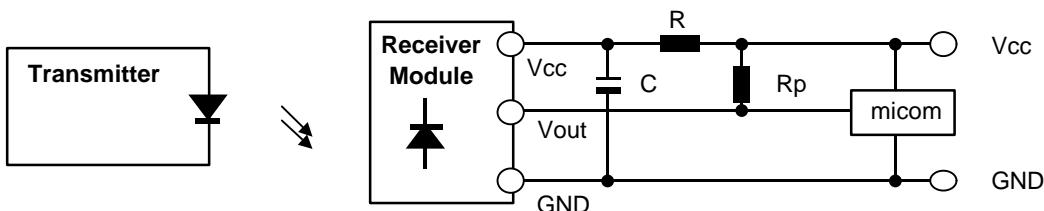

\*1 Recommended Circuit Description

- 1) Transmitter(IRED) drive current  
: IFP = 300mA<sub>P-P</sub> ~ 600mA<sub>P-P</sub>
- 2) R-C Decoupling Filter with Lower Cut-off Frequency  
:  $R=100\Omega$ ,  $C=47\mu F$   $\Rightarrow$   $f_c = 1/2 \pi RC = 33.9\text{Hz}$
- 3) External pull-up resistor(optional)  
: 10kΩ over