

ELM852xA CMOS operational amplifier

http://www.elm-tech.com

■General description

ELM852xA is low voltage and low power CMOS single operational amplifier with wide range of common mode signal input voltage and push-pull output stage. With 1.2V single power supply, ELM852xA makes it easy to design power circuit. ELM852xA is suitable for circuit of portable equipments which require low power consumption or single power.

■Features

- Operation from a single power source
- Low voltage operation : $1.2V \leq Vdd \leq 6.0V$
- Low current consumption : Typ. $150\mu A$ ($Vdd=3.0V$)
- Common-mode input voltage range
 - : Vss to $Vdd-0.3V$ ($Vdd=1.5V$)
 - : Vss to $Vdd-0.1V$ ($Vdd=3.0V$)
- Output stage : Push-pull
- Unity gain bandwidth : Typ. $1MHz$ ($Vdd \geq 1.5V$)
- Package : SOT-25, SC-70-5(SOT-353)

■Application

- Battery-operated portable devices
- Micropower signal process
- Low voltage analog circuit

■Maximum absolute ratings

Parameter	Symbol	Limit	Unit
Power supply voltage	Vdd	7.0	V
Input voltage	Vin	$Vss-0.3$ to $Vdd+0.3$	V
Output voltage	Vout	$Vss-0.3$ to $Vdd+0.3$	V
Output short circuit		Continuous	Sec.
Power dissipation	Pd	300 (SOT-25)	mW
		150 ((SC-70-5)(SOT-353))	
Operating temperature	Top	-40 to +85	°C
Storage temperature	Tstg	-55 to +125	°C


■Selection guide

ELM852xA-x

Symbol	Package	
a	B: SOT-25 C: SC-70-5(SOT-353)	
b	Product version	A
c	Taping direction	S, N: Refer to PKG file


ELM852 x A - x
↑↑↑
a b c

■Pin configuration



Pin No.	Pin name
1	OUT
2	VDD
3	IN+
4	IN-
5	VSS

■Standard circuit

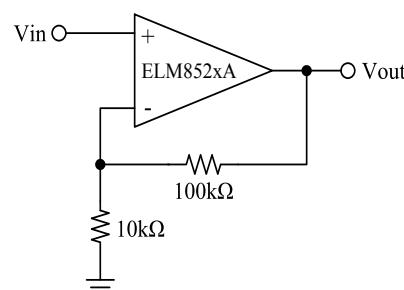

ELM852xA CMOS operational amplifier

http://www.elm-tech.com

■Electrical characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating voltage	Vdd		1.2		6.0	V

Vdd=1.5V

Vss=0V, Top=25°C

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Input offset voltage	Vio	Vcm=Vdd/2, Unity gain follower			±6	mV
Input bias current	Iib				1.0	nA
Common-mode input voltage range	Vcmr	For CMRR≥45dB	0.00		1.20	V
Maximum output voltage swing	Voutsh	Vid=100mV, RL=10kΩ to Vss	1.40			V
Minimum output voltage swing	Voutsl	Vid=100mV, RL=10kΩ to Vdd			0.10	V
Source current	Isource	Vout=1.2V, Vid=100mV	0.4	1.0		mA
Sink current	Isink	Vout=0.3V, Vid=100mV	1.0	2.5		mA
Large-signal voltage gain	Avd	RL=10kΩ to Vss, Vcm=0.75V		115		dB
Common-mode rejection ratio	CMRR	RL=100kΩ to Vss, Vcm=0.75V		95		dB
Supply voltage rejection ratio	PSRR	RL=100kΩ to Vss, Vcm=0.75V		90		dB
Current consumption	Iss	Vcm=Vdd/2, Unity gain follower		140	280	μA
Short current	Ishortp	Vout to Vss shrot, Vid=100mV		1.4		mA
	Ishortn	Vout to Vdd shrot, Vid=100mV		4.0		mA
Unity gain bandwidth	GBW			1		MHz
Slew rate	SR	RL=100kΩ, CL=20pF	0.55	1.00		V/μs

Vdd=3.0V

Vss=0V, Top=25°C

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Input offset voltage	Vio	Vcm=Vdd/2, Unity gain follower			±6	mV
Input bias current	Iib				1.0	nA
Common-mode input voltage range	Vcmr	For CMRR≥45dB	0.00		2.90	V
Maximum output voltage swing	Voutsh	Vid=100mV, RL=10kΩ to Vss	2.90			V
Minimum output voltage swing	Voutsl	Vid=100mV, RL=10kΩ to Vdd			0.10	V
Source current	Isource	Vout=2.7V, Vid=100mV	1.5	4.0		mA
Sink current	Isink	Vout=0.3V, Vid=100mV	3.0	7.5		mA
Large-signal voltage gain	Avd	RL=10kΩ to Vss, Vcm=1.5V		120		dB
Common-mode rejection ratio	CMRR	RL=10kΩ to Vss, Vcm=1.5V		85		dB
Supply voltage rejection ratio	PSRR	RL=10kΩ to Vss, Vcm=1.5V		100		dB
Current consumption	Iss	Vcm=Vdd/2, Unity gain follower		150	300	μA
Short current	Ishortp	Vout to Vss shrot, Vid=100mV		14		mA
	Ishortn	Vout to Vdd shrot, Vid=100mV		25		mA
Unity gain bandwidth	GBW			1		MHz
Slew rate	SR	RL=100kΩ, CL=20pF	0.40	1.00		V/μs

ELM852xA CMOS operational amplifier

http://www.elm-tech.com

■Note

1) Common mode input voltage range

ELM852xA common mode input voltage range is fixed under the condition of $CMRR \geq 45\text{dB}$; ELM852xA is able to accept the input above its specification if the degradation of CMRR is not considered. Even if the input voltage exceeds either positive or negative power voltage, troubles such as reverse of output will not occur.

As maximum absolute rating, the input voltage is possible within $(V_{ss}-0.3)\text{V}$ to $(V_{dd}+0.3)\text{V}$.

2) Operation from single power source


ELM852xA is designed to be most suitable for single power source; therefore, ELM852xA is able to share power supply with logic circuit one. Meanwhile, ELM852xA can also operate from double power sources. To protect power supplies of ELM852xA and logic circuit from noise, please separate wire from power supply and use decoupling (bypass) capacitor. Using the capacitor can improve PSRR characteristics, especially on 10kHz to 100kHz or more.

3) Feedback


When OP-AMP circuit is used with feedback resistor, oscillation may happen in the circuit with loop-gain like unity gain follower.

- When large feedback resistance is used, the phase margin is decreased by its combination with the parasitic capacitance of the input part of OP-AMP. In this situation, please connect small capacitor in parallel with feedback resistor as shown in fig-1.
- For capacitive load, external resistor in series connection will be effective as shown in fig-2.
($RL=300$ to 500Ω)
- Being used as an unity gain follow, ELM852xA is able to drive capacitive load of 100pF directly without oscillation.



a) fig-1

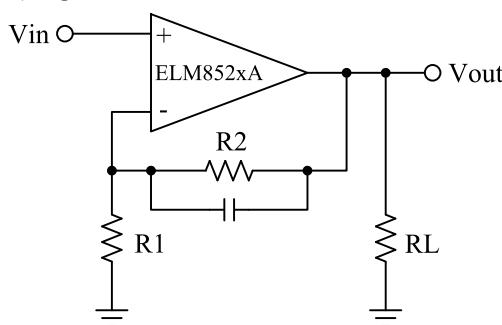

b) fig-2

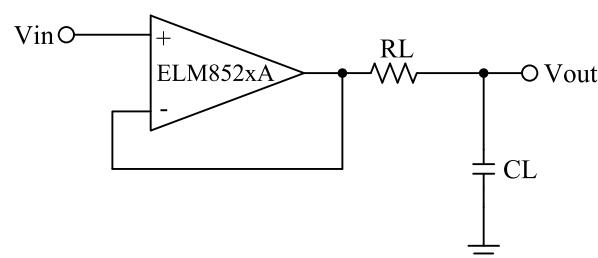

■Marking





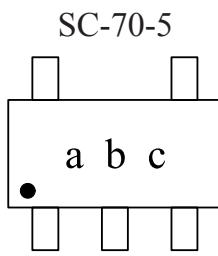
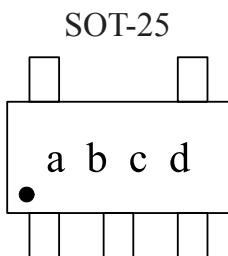


Symbol	Mark	Content
a, b	5 D	ELM852BA (SOT-25)
	> 3	ELM852CA (SC-70-5)
c	0 to 9 and A to Z (I, O, X excepted.)	Lot No.
d	0 to 9 and A to Z (I, O, X excepted.)	Lot No.

ELM852xA CMOS operational amplifier







<http://www.elm-tech.com>

■ Typical characteristics

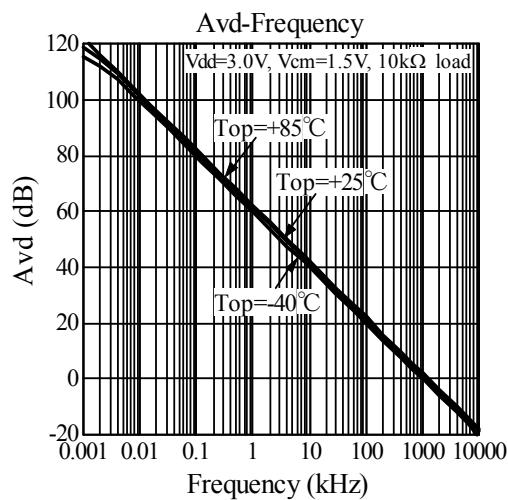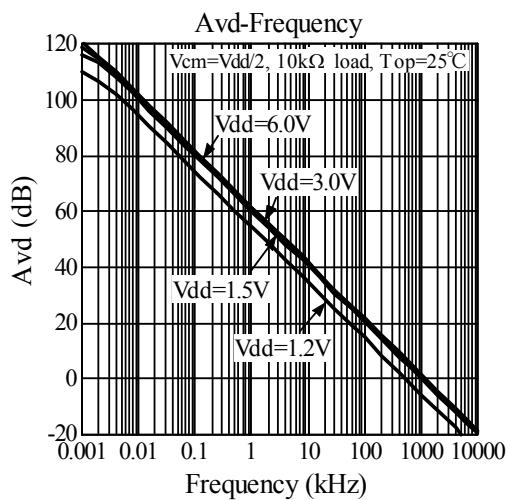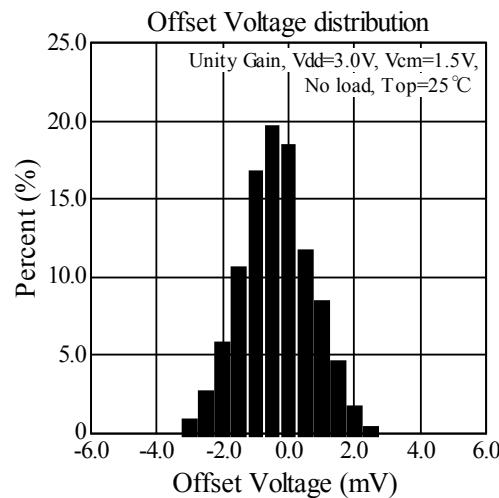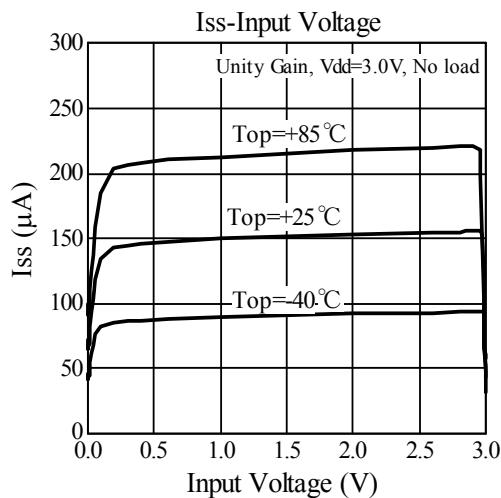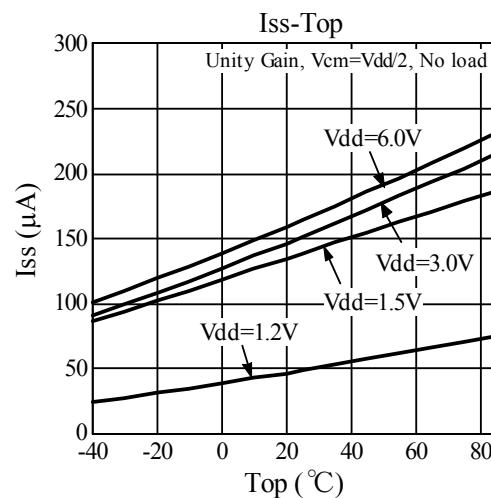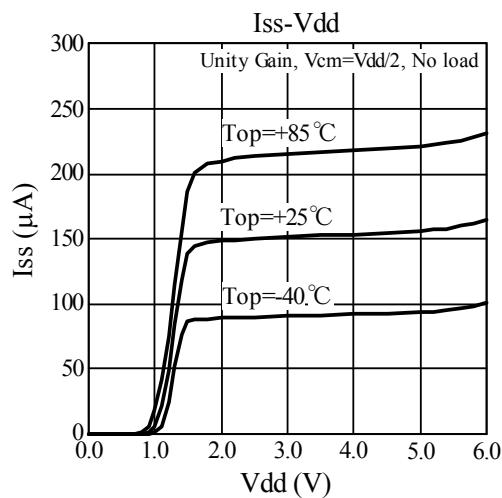







ELM852xA CMOS operational amplifier

<http://www.elm-tech.com>

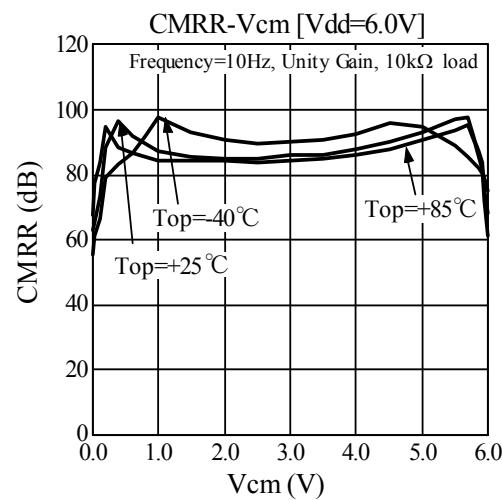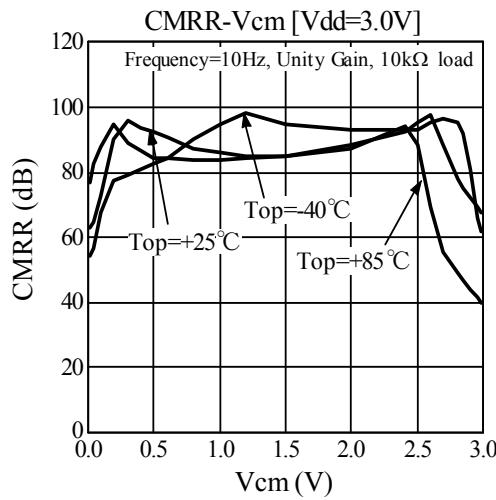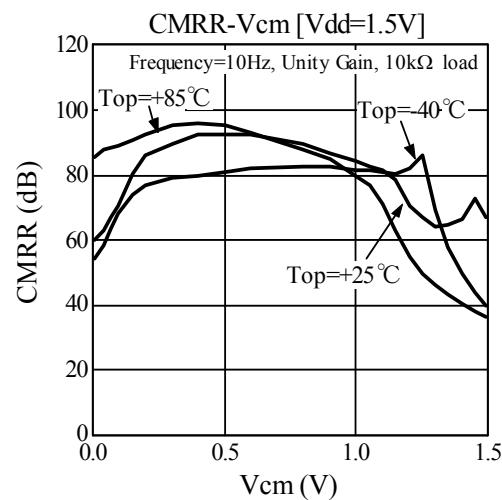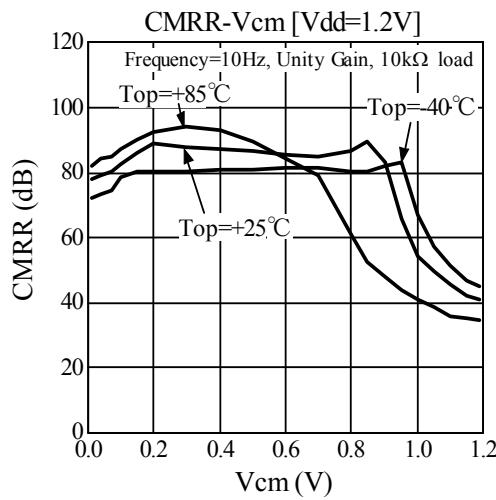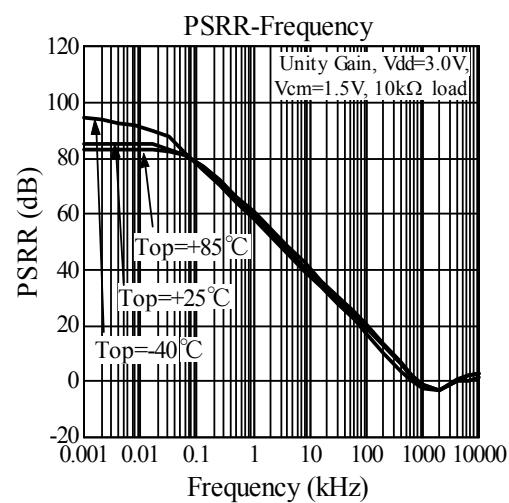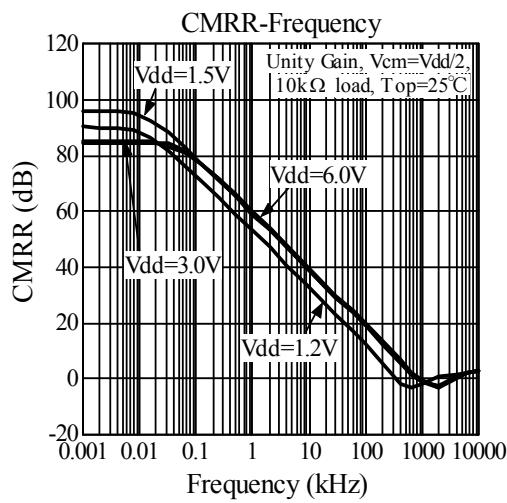







ELM852xA CMOS operational amplifier

<http://www.elm-tech.com>

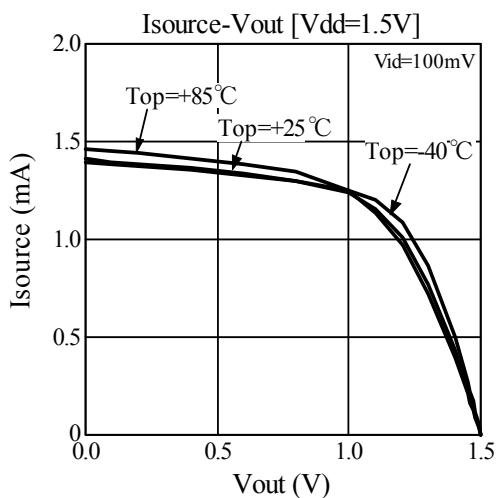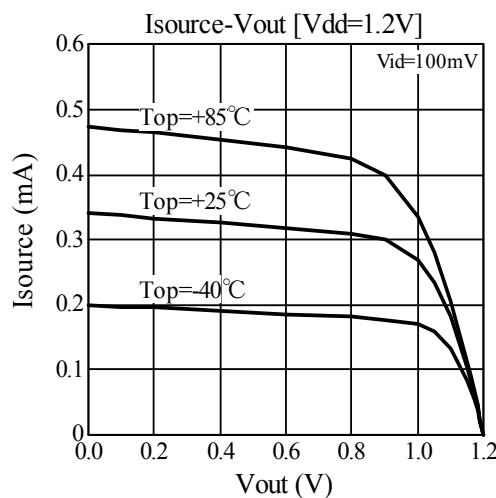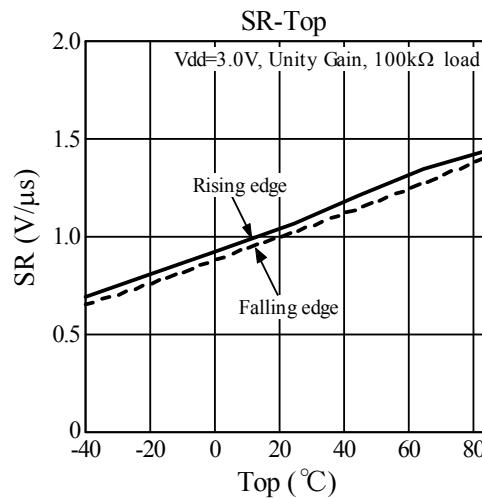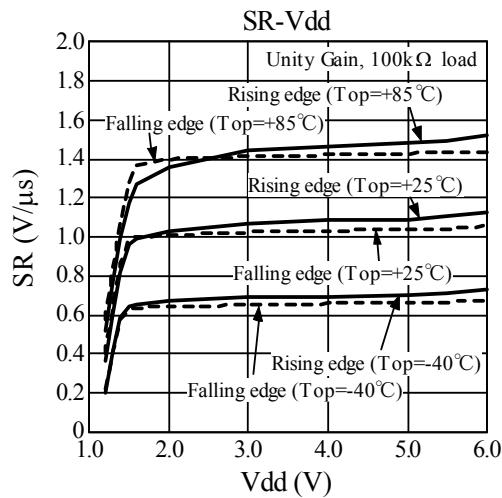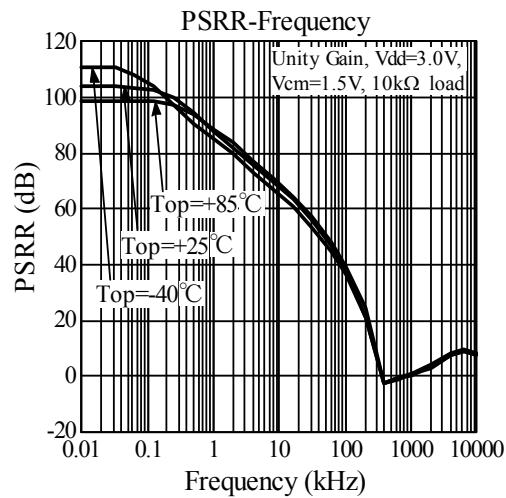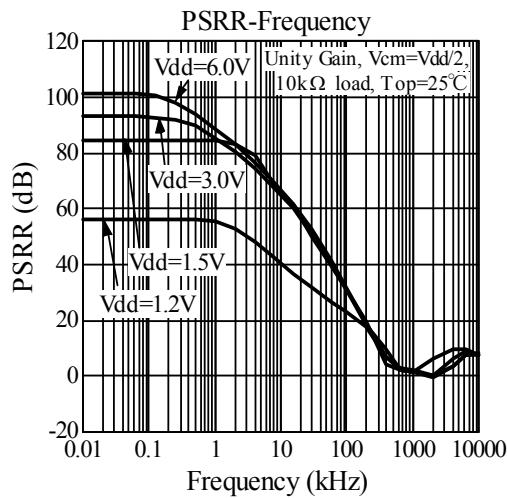







ELM852xA CMOS operational amplifier

<http://www.elm-tech.com>

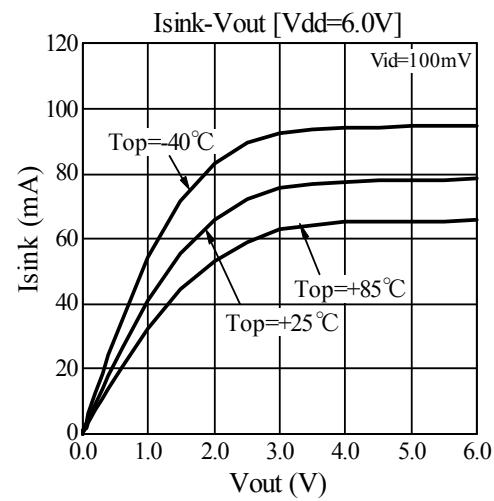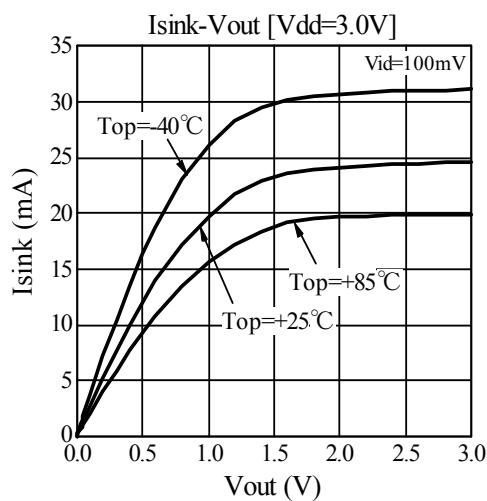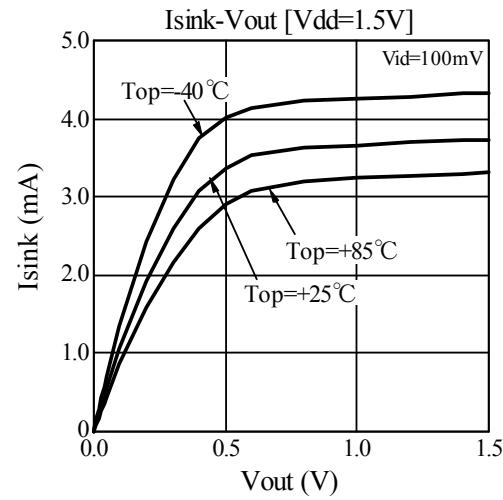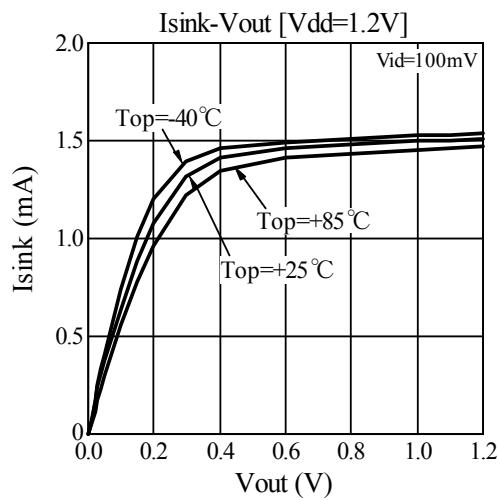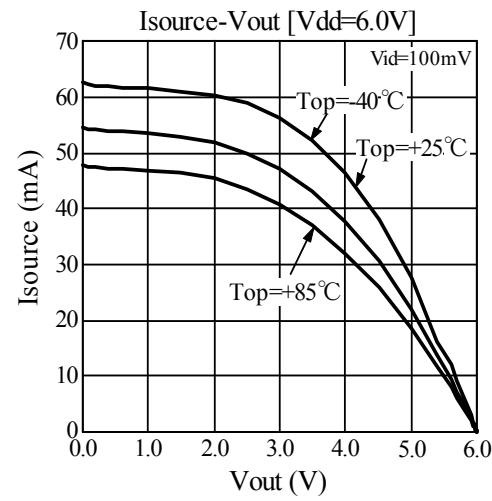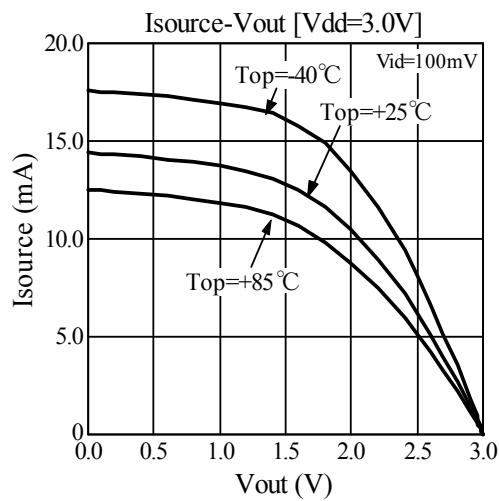

ELM852xA CMOS operational amplifier

<http://www.elm-tech.com>

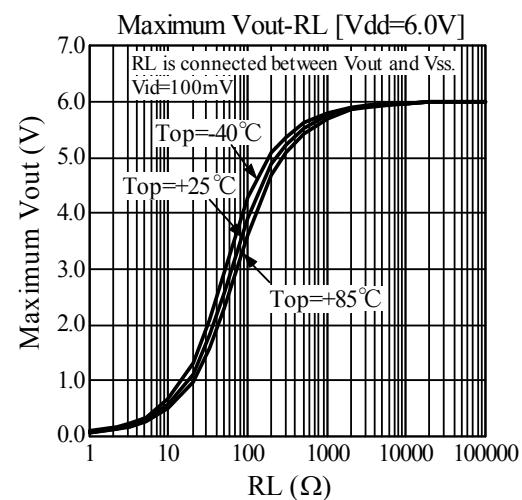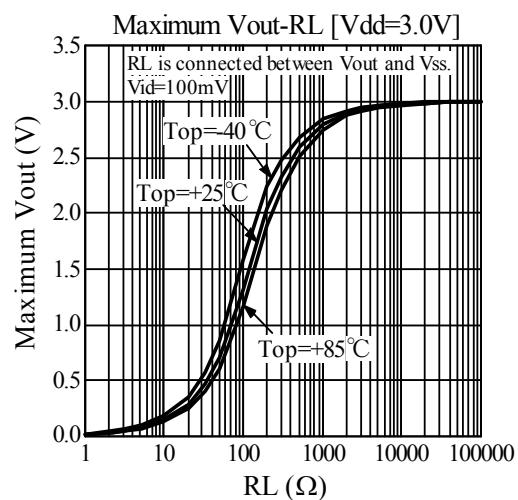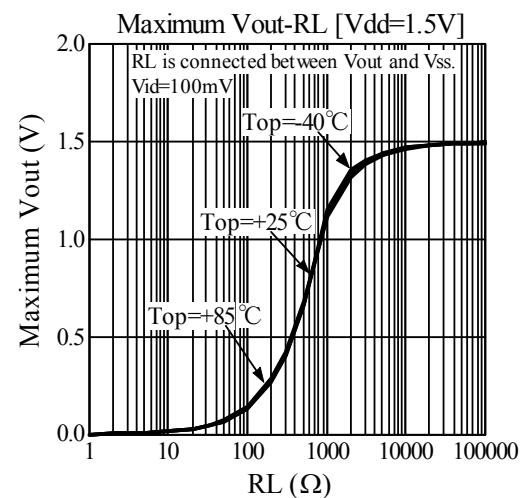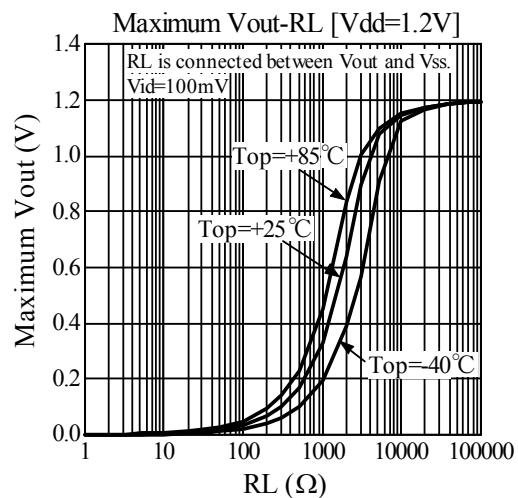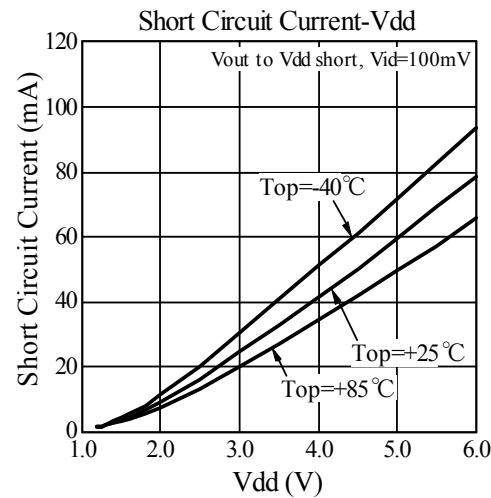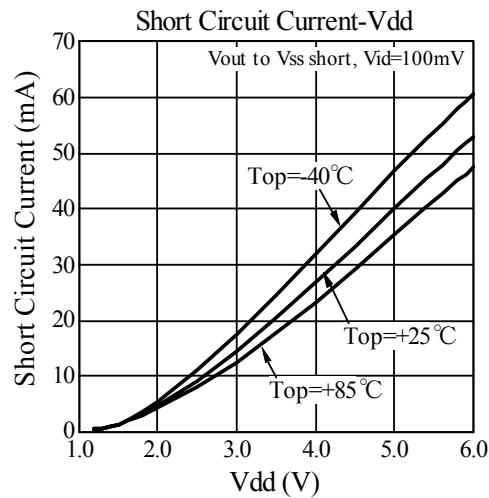

ELM852xA CMOS operational amplifier

<http://www.elm-tech.com>

