

Power transistor (−60V, −5A)

2SA2096

●Features

- 1) High speed switching.
(Tf : Typ. : 25ns at $I_c = -5A$)
- 2) Low saturation voltage, typically
(Typ. : −200mV at $I_c = -3A$, $I_B = -0.3A$)
- 3) Strong discharge power for inductive load and capacitance load.
- 4) Complements the 2SC5881

●Applications

Low frequency amplifier
High speed switching


●Structure

PNP Silicon epitaxial planar transistor

●Packaging specifications

Type	Package	Taping
	Code	TL
	Basic ordering unit (pieces)	2500
2SA2096		○

●External dimensions (Unit : mm)

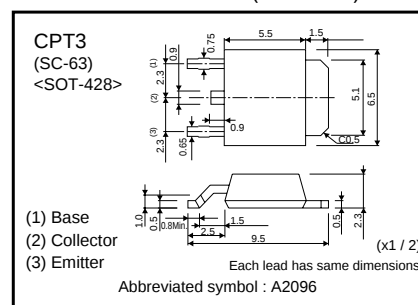

●Absolute maximum ratings (Ta=25°C)

Parameter		Symbol	Limits	Unit
Collector-base voltage		V_{CBO}	−60	V
Collector-emitter voltage		V_{CEO}	−60	V
Emitter-base voltage		V_{EBO}	−6	V
Collector current	DC	I_c	−5.0	A
	Pulsed	I_{cP}	−10.0	A *1
Power dissipation	DC	P_c	1.0	W *2
	Pulsed	P_c	10.0	W *2
Junction temperature		T_j	150	°C
Range of storage temperature		T_{stg}	−55 to 150	°C

*1 $P_W=100ms$

*2 With each pin mounted the recommended lands.

Transistors

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Collector-emitter breakdown voltage	BV_{CEO}	-60	-	-	V	$I_C = -1\text{mA}$
Collector-base breakdown voltage	BV_{CBO}	-60	-	-	V	$I_C = -100\mu\text{A}$
Emitter-base breakdown voltage	BV_{EBO}	-6	-	-	V	$I_E = -100\mu\text{A}$
Collector cut-off current	I_{CBO}	-	-	-1.0	μA	$V_{CB} = -40\text{V}$
Emitter cut-off current	I_{EBO}	-	-	-1.0	μA	$V_{EB} = -4\text{V}$
Collector-emitter saturation voltage	$V_{CE(sat)}$	-	-200	-500	mV	$I_C = -3\text{mA}$ $I_B = -0.3\text{mA}$
DC current gain	h_{FE}	120	-	270	-	$V_{CE} = -2\text{V}$ $I_C = -100\text{mA}$
Transition frequency	f_T	-	170	-	MHz	$V_{CE} = -10\text{V}$ $I_E = 100\text{mA}$ $f = 10\text{MHz}$
Collector output capacitance	C_{ob}	-	75	-	pF	$V_{CB} = -10\text{V}$ $I_E = 0\text{mA}$ $f = 1\text{MHz}$
Turn-on time	T_{on}	-	25	-	ns	$I_C = -5.0\text{A}$ $I_{B1} = -500\text{mA}$
Storage time	T_{stg}	-	130	-	ns	$I_{B2} = 500\text{mA}$
Fall time	T_f	-	25	-	ns	$V_{CC} = -25\text{V}$

*1 Non repetitive pulse

*2 See Switching characteristics measurement circuits

● h_{FE} RANK

Q
120-270

●Electrical characteristic curves




Fig.1 Safe Operating Area

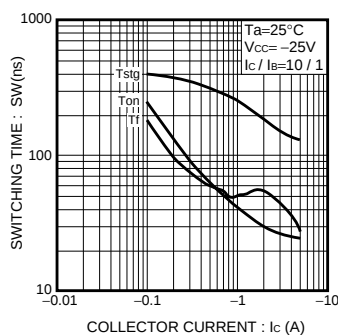


Fig.2 Switching Time




Fig.3 DC Current Gain vs. Collector Current (I)




Fig.4 DC Current Gain vs. Collector Current (II)

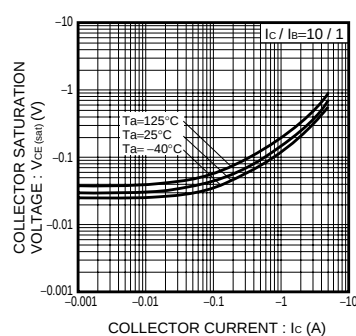


Fig.5 Collector-Emitter Saturation Voltage vs. Collector Current (I)

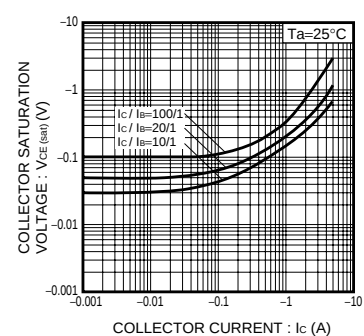


Fig.6 Collector-Emitter Saturation Voltage vs. Collector Current (II)

Transistors

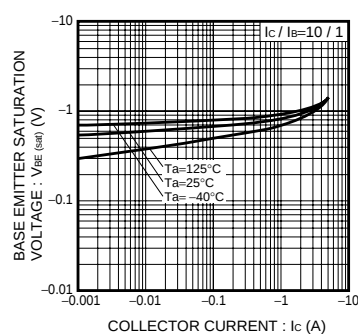


Fig.7 Base-Emitter Saturation Voltage vs. Collector Current




Fig.8 Grounded Emitter Propagation Characteristics




Fig.9 Transition Frequency

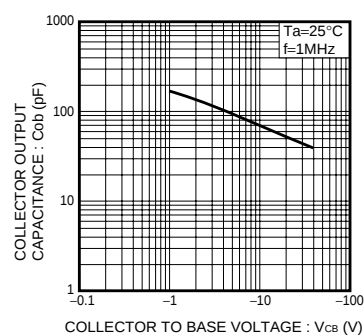


Fig.10 Collector Output Capacitance

●Switching characteristics measurement circuits

