

## AM Receiver Circuit

Technology: Bipolar

### Features

- Controlled RF preamplifier
- Multiplicative balanced mixer
- Separate oscillator with amplitude control
- IF amplifier with gain control
- Balanced full-wave detector
- Audio preamplifier
- Internal AGC voltage
- Amplifier for field-strength indication
- Electronic stand-by on/off switch

### Block Diagram / Application Circuit

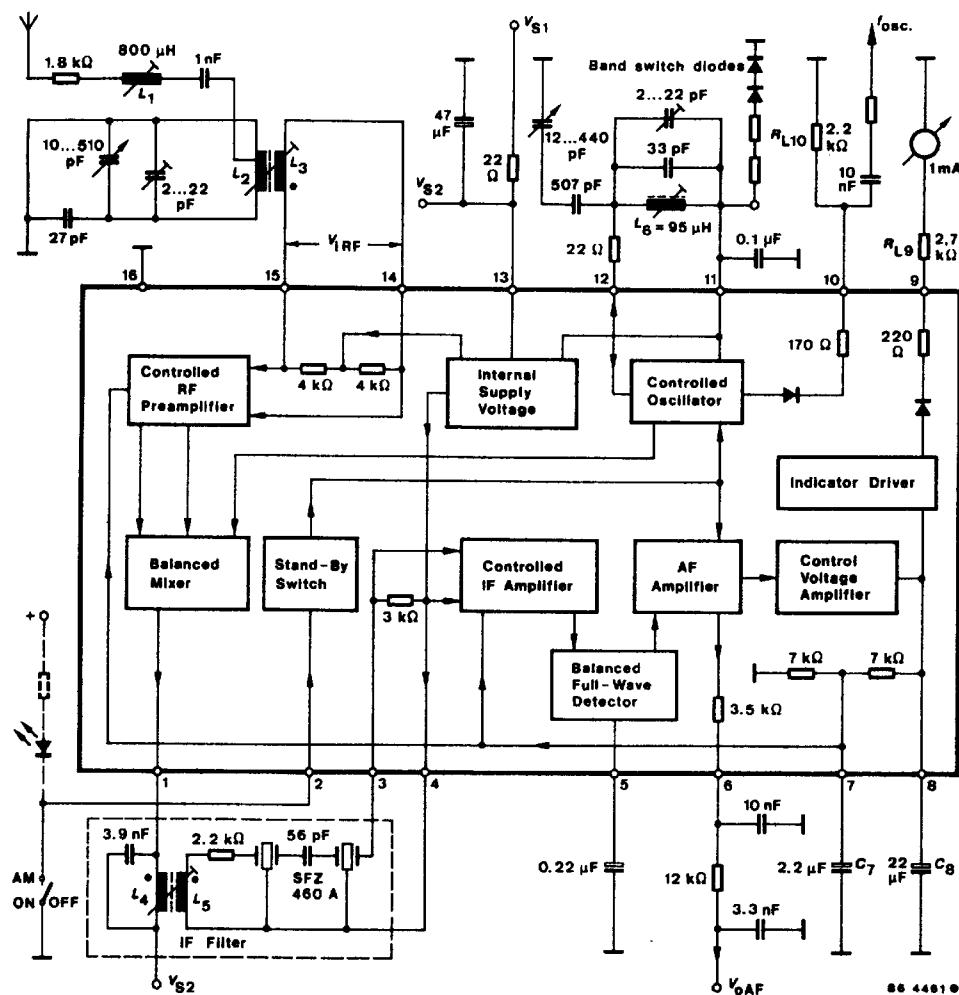


Figure 1. Block diagram and application circuit

## Absolute Maximum Ratings

Reference point Pin 16, unless otherwise specified

Parameters		Symbol	Value	Unit
Supply voltage	Pin 13	V <sub>S</sub>	20	V
Voltage on Pin 2		V <sub>2</sub>	0 to 20	V
RF inputs Voltages	Reference point 15	± V <sub>i</sub> 14/15	12	V
	Pin 14	V <sub>i</sub>	V <sub>s</sub>	V
	Pin 14	-V <sub>i</sub>	0.6	V
	Pin 15	V <sub>i</sub>	V <sub>i</sub>	V
	Pin 15	-V <sub>i</sub>	0.6	V
RF inputs Currents	Pin 14, 15	± I <sub>i</sub>	200	mA
Ambient temperature range		T <sub>amb</sub>	- 30 to + 80	°C
Storage temperature range		T <sub>stg</sub>	- 55 to + 150	°C

## Electrical Characteristics

V<sub>S</sub> = 8.5 V, reference point Pin 16, f<sub>IF</sub> = 1MHz, R<sub>G</sub> = 50 Ω, f<sub>mod</sub> = 0.4 kHz, m = 30%, f<sub>IF</sub> = 460 kHz, T<sub>amb</sub> = +25°C, unless otherwise specified

Parameters	Test Conditions / Pin	Symbol	Min	Type	Max	Unit
Supply voltage range	Pin 13	V <sub>S</sub>	7.5		18	V
Supply current	Without load, I <sub>L</sub> = 0 (Pin 11)	I <sub>S</sub>		23	30	mA
<b>RF preamplifier and mixer</b>						
DC input voltages	Pin 14, 15	V <sub>i</sub>		V <sub>S</sub> /2		V
Input impedances	V <sub>iRF</sub> < 300 μV, Pin 14,15 V <sub>iRF</sub> > 10 mV, Pin 14, 15	R <sub>i</sub> C <sub>i</sub> R <sub>i</sub> C <sub>i</sub>		5.5 25 8.0 22		kΩ pF kΩ pF
Output impedance	Pin 1	R <sub>O</sub> C <sub>O</sub>	500	6.0		kΩ pF
Maximum conversion conductance	I <sub>O 1 IF</sub> /V <sub>iRF</sub>	ΔS <sub>M</sub>			6.5	mA/V
Maximum IF output voltage	Pin 1	V <sub>OIF(PP)</sub>			5.0	V
Output current	Pin 1	I <sub>O</sub>		1.2		mA
Preamplifier control range		S <sub>M</sub>		30		dB
Max. RF input voltage	Pin 14, 15	V <sub>i(PP)</sub>			2.5	V
<b>Oscillator</b>						
Frequency range	Pin 12	f <sub>OSC</sub>	0.6		60	MHz
Oscillator circuit impedance range	Pin 12	Z <sub>LOSC</sub>	0.5		200	kΩ
Controlled oscillator amplitude	Pin 12	V <sub>OSC</sub>		130	150	mV
DC output voltage	I <sub>L</sub> = 0 V	V <sub>O</sub>		6 V <sub>BE(4V)</sub>		V
Output load current range	Pin 11	-I <sub>L</sub>			20	mA
Output resistance	I <sub>L</sub> = 5 ± 0.5 mA, Pin 11	R <sub>O</sub>		25		Ω
<b>Oscillator frequency output</b>						
Output voltage	R <sub>L10</sub> = 4.7 kΩ	V <sub>O(PP)</sub>		320		mV
Output resistance		R <sub>O</sub>		170		Ω
Allowable output current		I <sub>O(P)</sub>			3	mA

Parameters	Test Conditions / Pin	Symbol	Min	Type	Max	Unit
<b>IF amplifier an AF stage</b>						
DC input voltages	Pin 3, 4	V <sub>i</sub>		2		V
Input impedance	Pin 3	R <sub>i</sub> C <sub>i</sub>	2.4 7	3 7	3.9	kΩ pF
Max. IF input voltage	m = 80%, d = 3% Pin 3	V <sub>i</sub>		90		mV
Control range	V <sub>0AF</sub> = -6 dB	ΔV <sub>i</sub>		61		dB
Audio output voltage	V <sub>i</sub> = 1 mV (Pin 3), without load, Pin 6	V <sub>O</sub>		310		mV
Audio output resistance	Pin 6	R <sub>O</sub>		3.5		kΩ
<b>Field-strength indication</b> Pin 9						
DC indicator voltages	R <sub>L9</sub> = 2.7 kΩ, V <sub>i</sub> = 0 R <sub>L9</sub> = 2.7 kΩ, V <sub>i</sub> = 500 mV	V <sub>O</sub> V <sub>O</sub>	0 2.5	2.8	140 3.1	mV V
Output current capability		-I <sub>O</sub>	2.0			mA
Output resistance	-I <sub>O</sub> = 0.5 mA	R <sub>O</sub>		220		Ω
Reverse voltage at the output	AM switch-off, ± I <sub>O</sub> ≤ 1 μA	V <sub>O</sub>		6		V
<b>Stand-by switch</b> Pin 2						
Switching voltage		V <sub>i</sub>		2.75		V
Required control voltage	AM ON AM OFF	V <sub>i</sub> V <sub>i</sub> (or open input)			2	V
Input current	AM on, switching current AM off, reverse current (V <sub>2</sub> = V <sub>3</sub> )	-I <sub>i</sub> ± I <sub>i</sub>			200 10	μA

## Operating Conditions

V<sub>S</sub> = 8.5 V, f<sub>iRF</sub> = 1 MHz, f<sub>mod</sub> = 0.4 kHz, m = 30%, T<sub>amb</sub> = 25°C, reference point Pin 16, see figure 2, unless otherwise specified

Parameters	Test Conditions / Pin	Symbol	Min	Type	Max	Unit
RF input voltages	(S + N)/N = 6 dB = 26 dB = 46 dB	V <sub>iRF</sub>		1.5 15 150		μV
RF input for agc operation		V <sub>iRF</sub>		30		μV
Control range for (Reference value V <sub>i</sub> = 500 mV)	ΔV <sub>0</sub> = 6 dB ΔV <sub>0</sub> = 1 dB	ΔV <sub>iRF</sub>		91 86		dB
Maximum RF input voltage	d = 3%, m = 80% d = 3%, m = 30% d = 10%, m = 30%	V <sub>iRF</sub>		0.5 0.7 0.9		V
Audio output voltage	V <sub>1</sub> = 1 mV V <sub>2</sub> = 4 μV, m = 0.8	V <sub>0AF</sub>		310 (± 2 dB) 130 (± 3.5 dB)		mV
RF input voltage	V <sub>0AF</sub> = 60 mV	V <sub>iRF</sub>		5.5		μV
Total distortion of audio output voltage	m = 80%, V <sub>i</sub> = 1 mV V <sub>i</sub> = 500 mV	d		0.5 3.0		%
Signal plus noise to noise ratio of audio output voltage	V <sub>i</sub> = 1 mV	(S + N) N		50		dB
IF bandwidth (-3 dB)		B <sub>iF</sub>		4.6		kHz
IF selectively	Δf = ± 9 kHz Δf = ± 36 kHz	S <sub>iF</sub>		30 60		dB

## Test Circuit

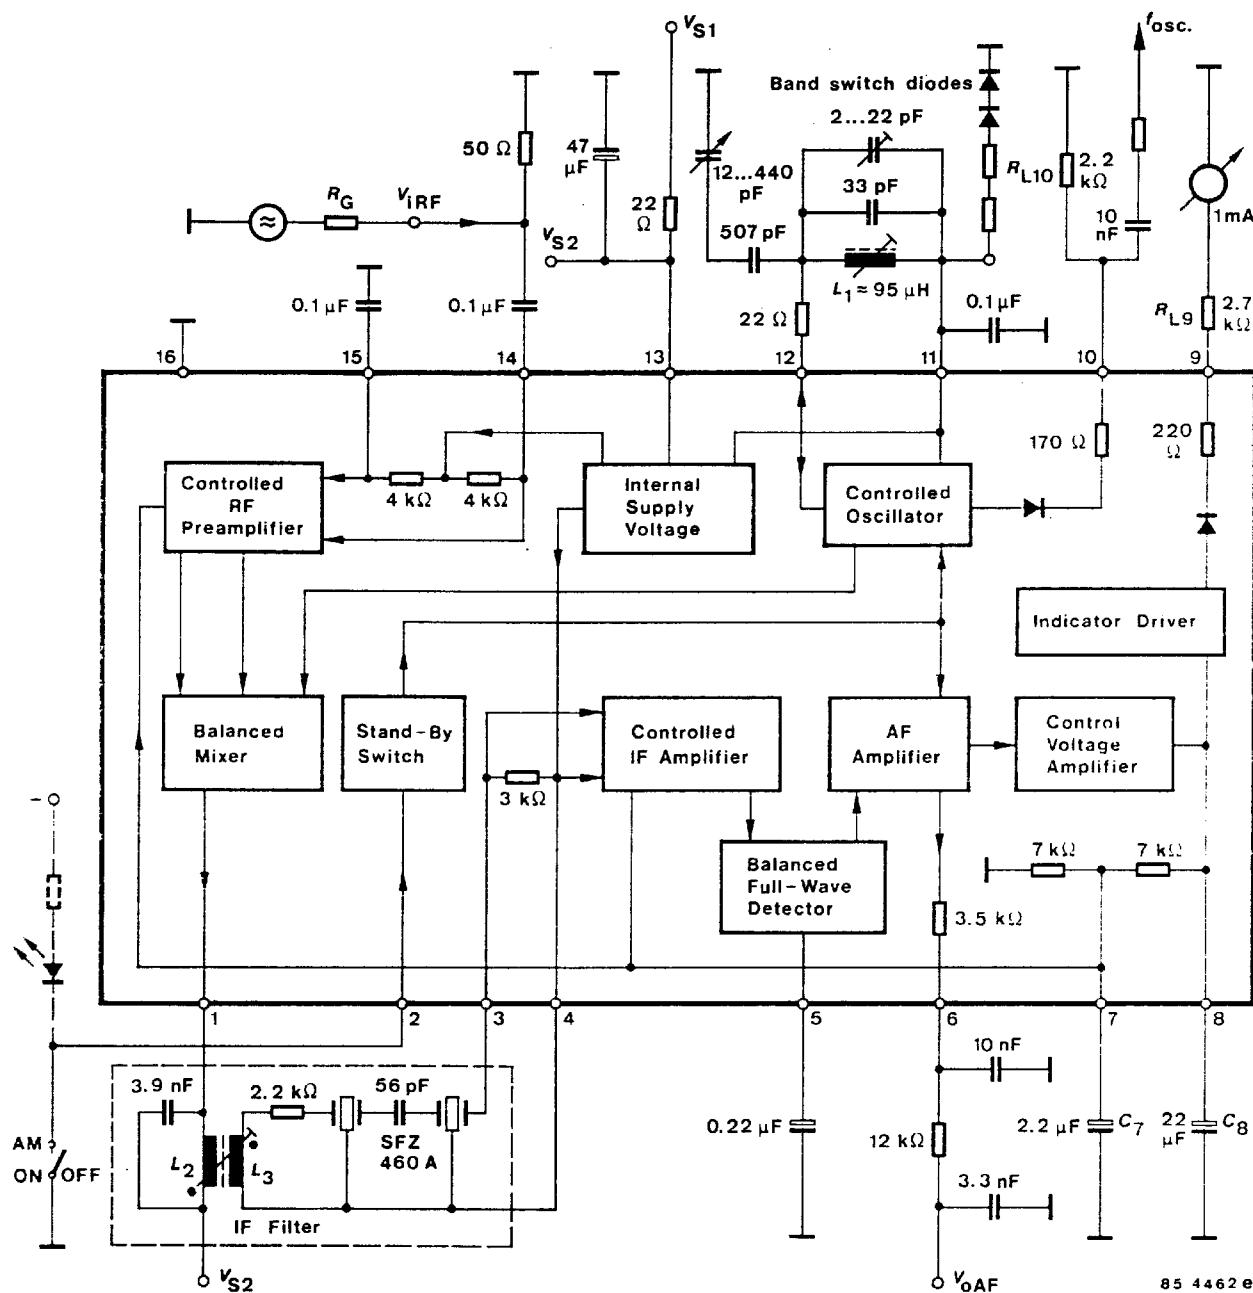


Figure 2. Test circuit

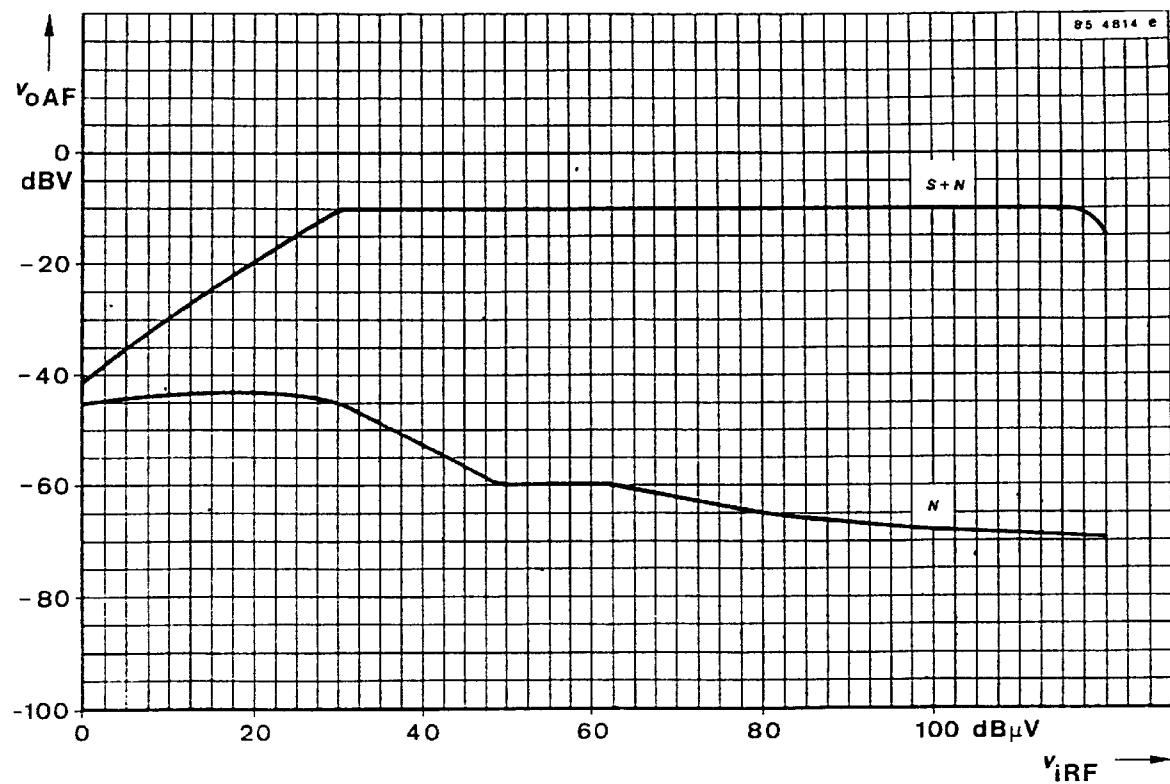


Figure 3.

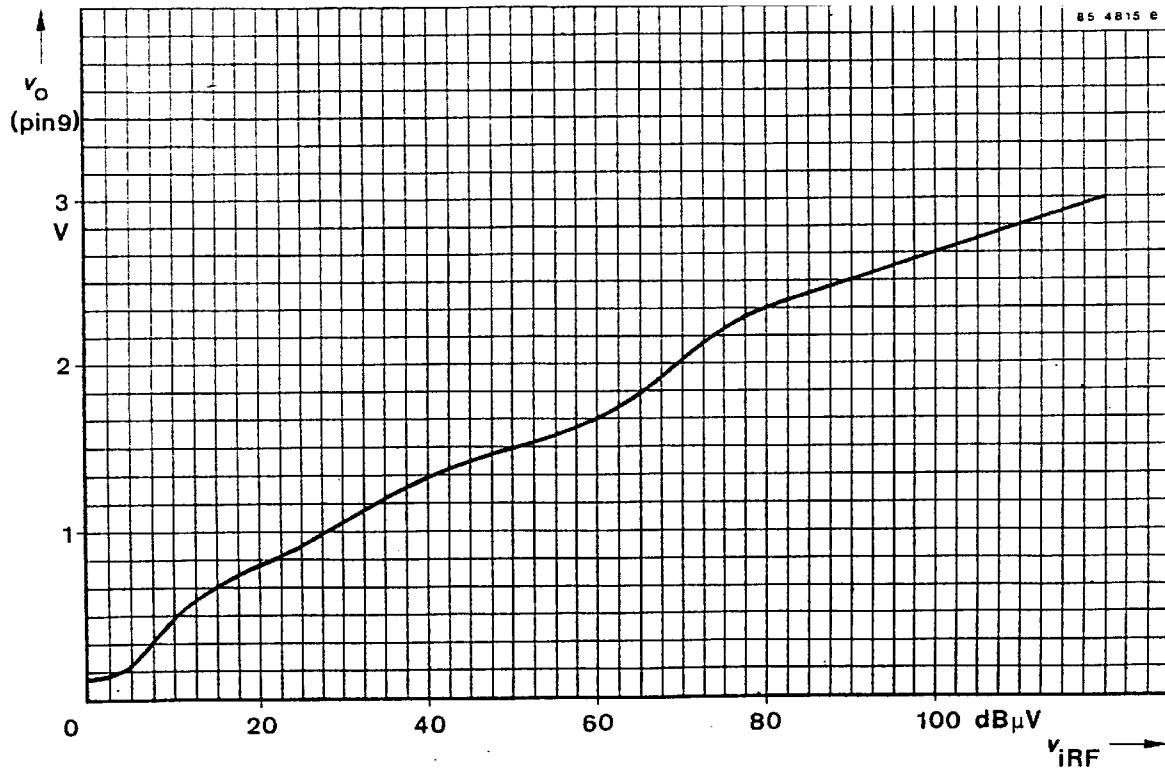


Figure 4.


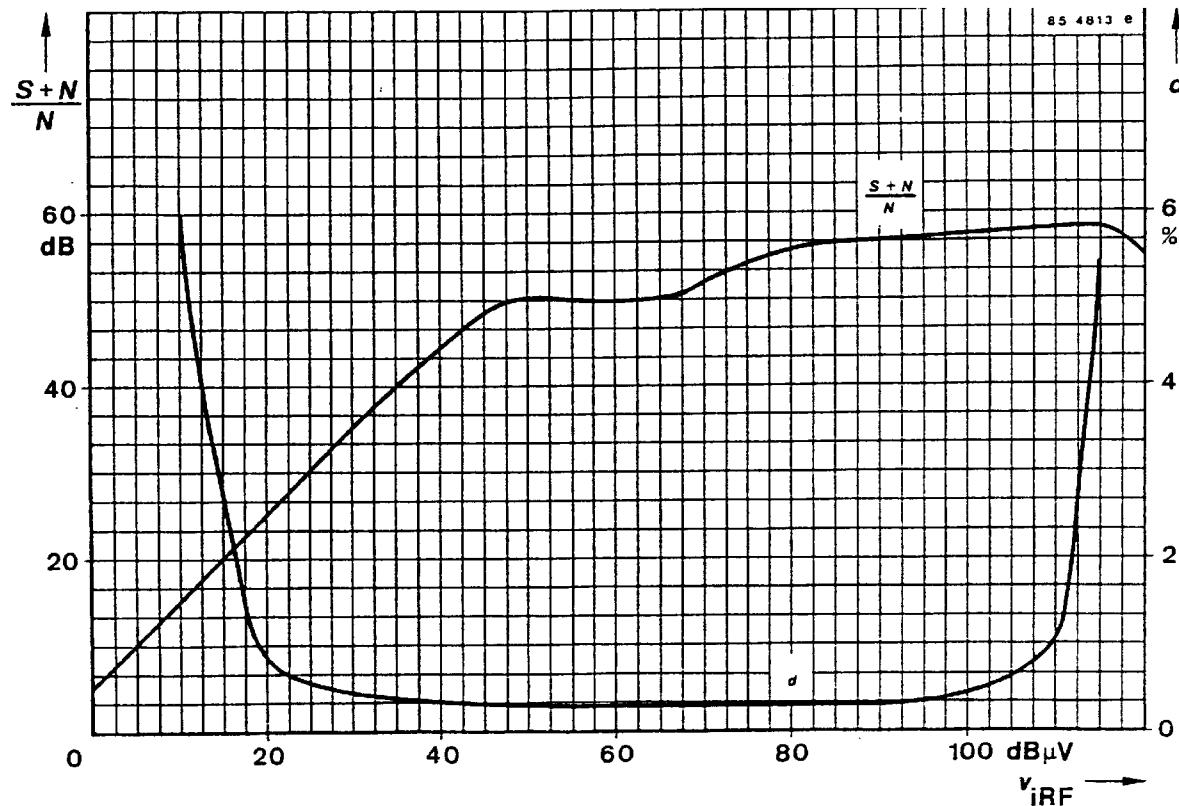


Figure 5.

## Dimensions in mm

### Package SO16

Dimensions in mm

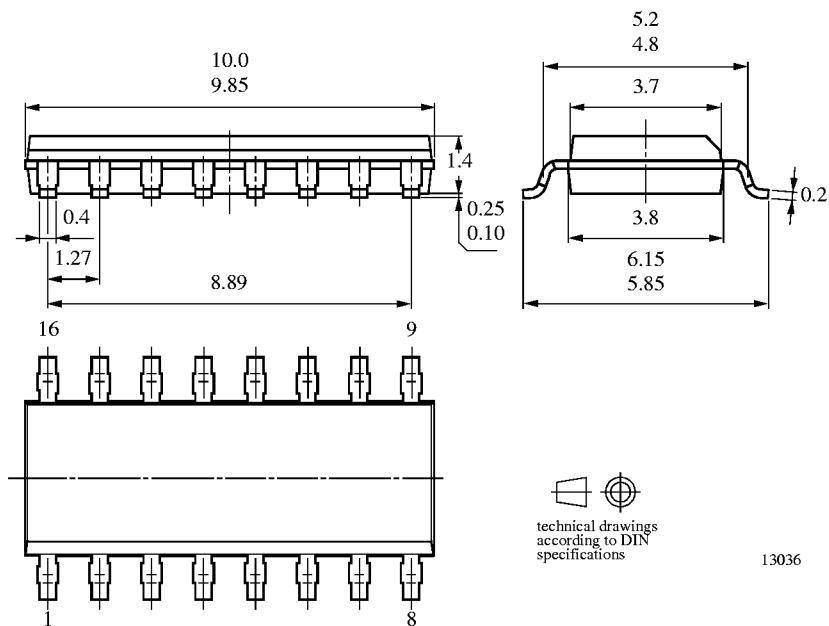

## Ozone Depleting Substances Policy Statement

It is the policy of **TEMIC Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**TEMIC Semiconductor GmbH** has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**TEMIC Semiconductor GmbH** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

### We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify TEMIC Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany  
Telephone: 49 (0)7131 67 2594, Fax number: 49 (0)7131 67 2423