

Low Voltage / Low Power CMOS 16-bit Microcontroller

TMP93PW46AF

1. Outline and Device Characteristics

The TMP93PW46A is OTP type MCU which includes 128 Kbyte One-time PROM. Using the adapter-socket, you can write and verify the data for the TMP93CW46A by general EPROM programmer.

The TMP93PW46A has the same pin-assignment as the TMP93CW46A (Mask ROM type).

Writing the program to Built-in PROM, the TMP93PW46A operates as the same way as the TMP93CW46A.

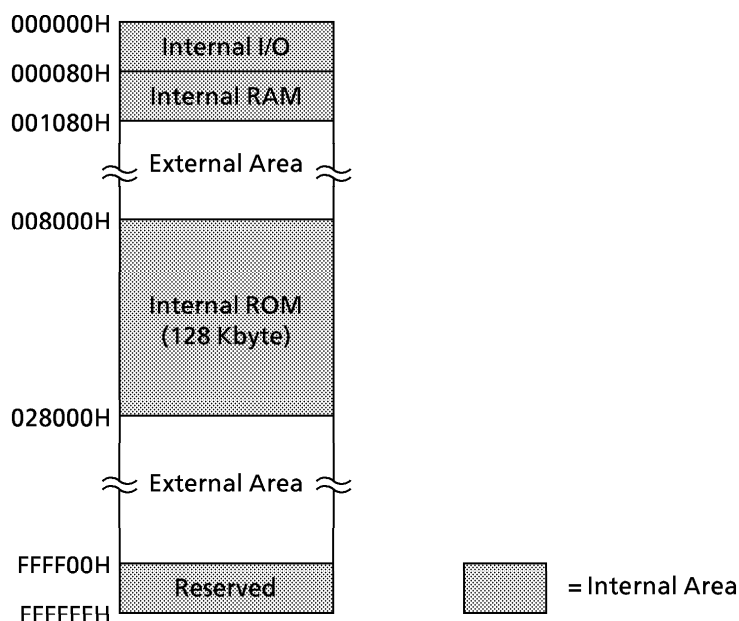


Figure 1.1 Memory map of TMP93CW46A/TMP93PW46A

MCU	ROM	RAM	Package	Adapter Socket
TMP93PW46AF	OTP 128 K-byte	4 K-byte	P-LQFP100-1414-0.50D	BM11129

000707EBP1

- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance / Handling Precautions.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

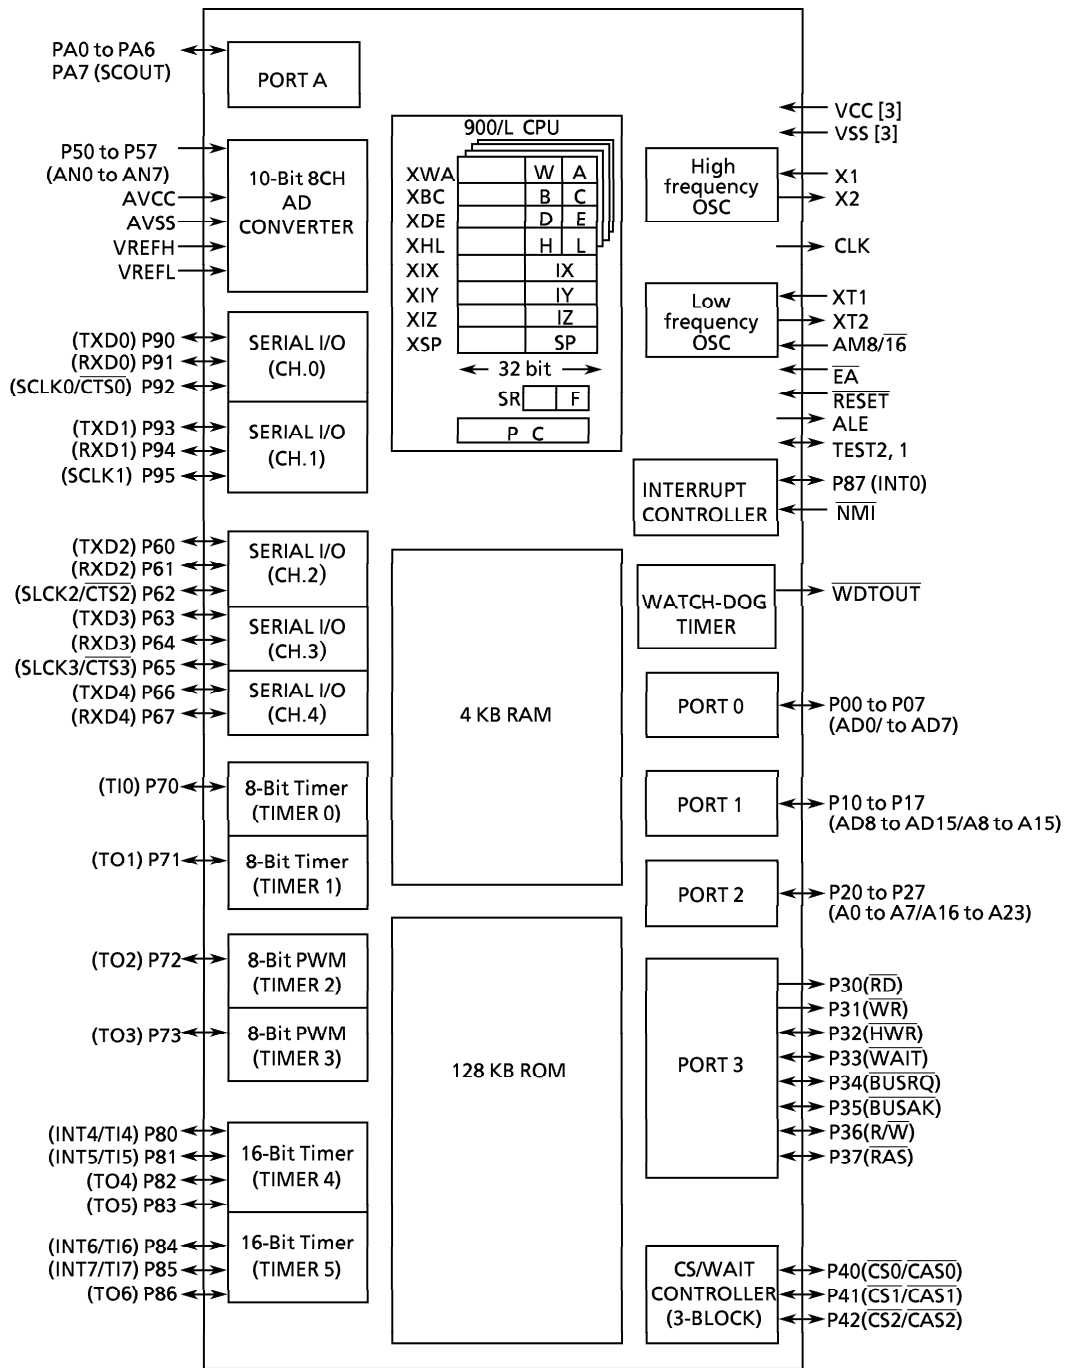


Figure 1.2 TMP93PW46A block diagram

2. Pin Assignment and Functions

The assignment of input / output pins for the TMP93PW46A their names and outline functions are described below.

2.1 Pin Assignment

Figure 2.1.1 shows pin assignment of the TMP93PW46AF.

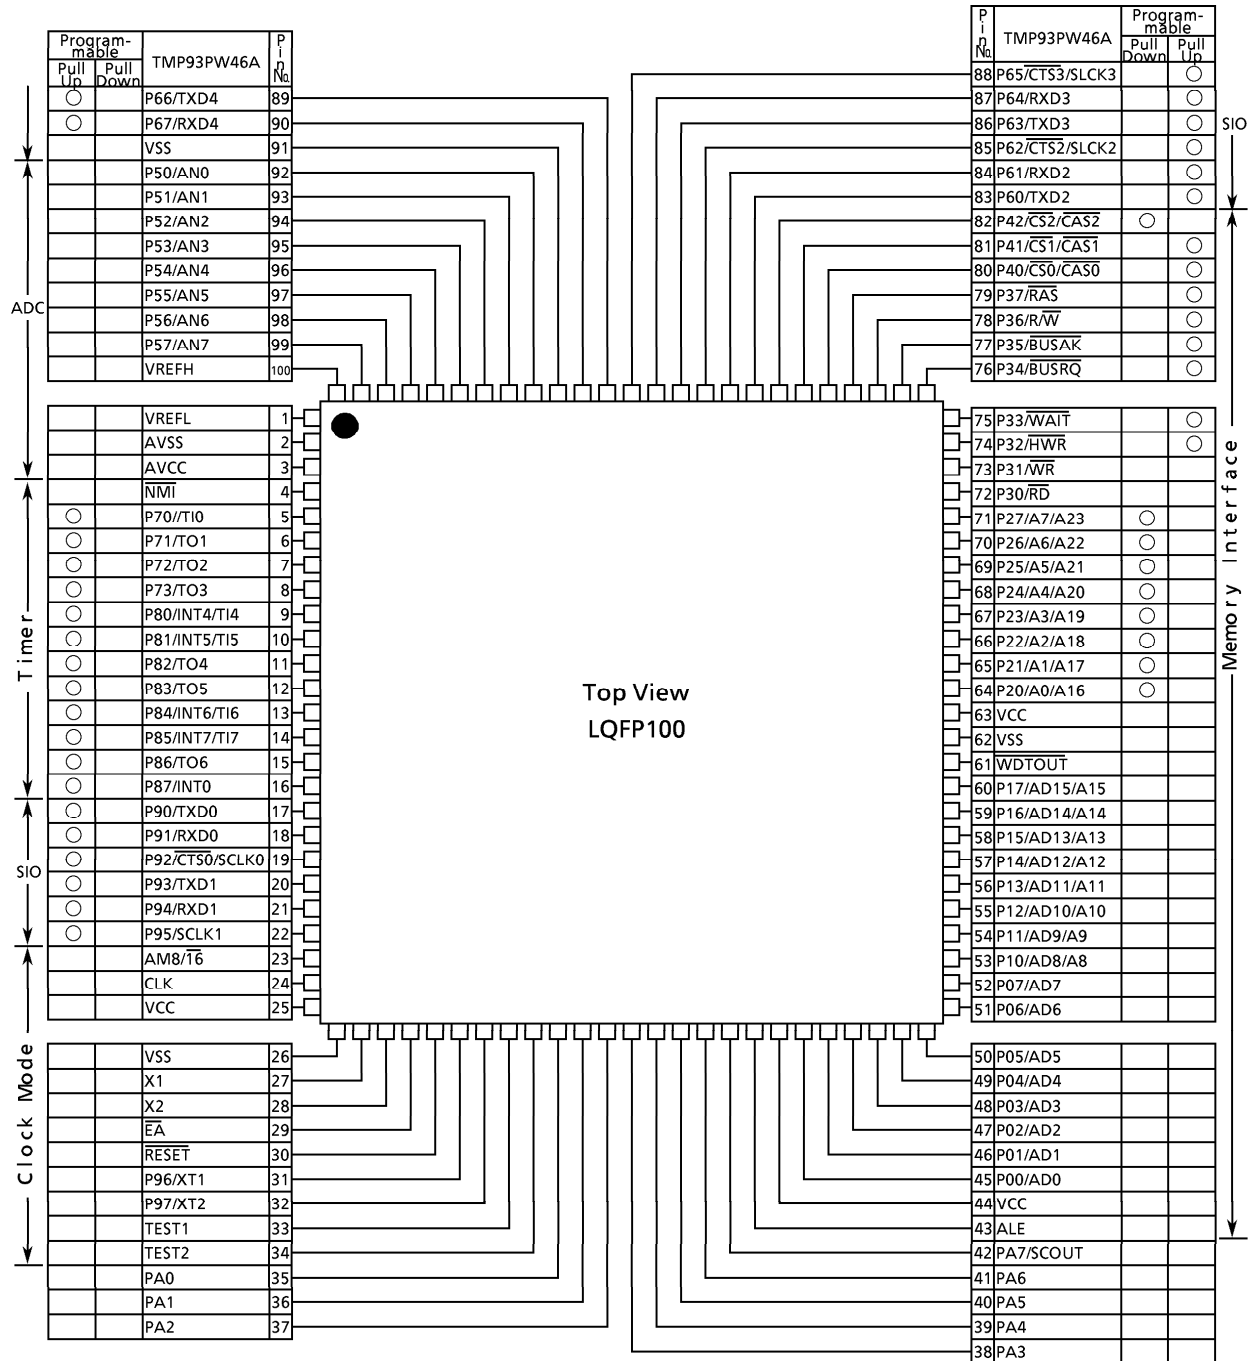


Figure 2.1.1 Pin Assignment (100-pin LQFP)

2.2 Pin Names and Functions

(1) Pin function of TMP93PW46A in MCU mode.

Table 2.2.1 Name and function in MCU mode (1/4)

Pin name	Number of pins	I/O	Function
P00 to P07 AD0 to AD7	8	I/O 3-state	Port 0: I/O port that allows selection of I/O on a bit basis Address/data (lower): Bits 0 to 7 for address/data bus
P10 to P17 AD8 to AD15 A8 to A15	8	I/O 3-state Output	Port 1: I/O port that allows selection of I/O on a bit basis Address data (upper): Bits 8 to 15 of address/data bus Address: Bits 8 to 15 of address bus
P20 to P27 A0 to A7 A16 to A23	8	I/O Output Output	Port 2: I/O port that allows selection of I/O on a bit basis (with pull-down resistor) Address: Bits 0 to 7 of address bus Address: Bits 16 to 23 of address bus
P30 \overline{RD}	1	Output Output	Port 30: Output port Read: Strobe signal for reading external memory
P31 \overline{WR}	1	Output Output	Port 31: Output port Write: Strobe signal for writing data on pins AD0 to 7
P32 \overline{HWR}	1	I/O Output	Port 32: I/O port (with pull-up resistor) High write: Strobe signal for writing data on pins AD8 to 15
P33 \overline{WAIT}	1	I/O Input	Port 33: I/O port (with pull-up resistor) Wait: Pin used to request CPU bus wait
P34 \overline{BUSRQ}	1	I/O Input	Port34: I/O port (with pull-up resistor) Bus request: Signal used to request high impedance for AD0 to 15, A0 to 23, \overline{RD} , \overline{WR} , \overline{HWR} , $\overline{R/W}$, \overline{RAS} , $\overline{CS0}$, $\overline{CS1}$, and $\overline{CS2}$ pins. (For external DMAC)
P35 \overline{BUSAK}	1	I/O Output	Port 35: I/O port (with pull-up resistor) Bus acknowledge: Signal indicating that AD0 to 15, A0 to 23, \overline{RD} , \overline{WR} , \overline{HWR} , $\overline{R/W}$, \overline{RAS} , $\overline{CS0}$, $\overline{CS1}$, and $\overline{CS2}$ pins are at high impedance after receiving \overline{BUSRQ} . (For external DMAC)
P36 $\overline{R/W}$	1	I/O Output	Port 36: I/O port (with pull-up resistor) Read/write: 1 represents read or dummy cycle; 0, write cycle.
P37 \overline{RAS}	1	I/O Output	Port 37: I/O port (with pull-up resistor) Row address strobe: Outputs \overline{RAS} strobe for DRAM.
P40 $\overline{CS0}$ $\overline{CAS0}$	1	I/O Output Output	Port 40: I/O port (with pull-up resistor) Chip select 0: Outputs 0 when address is within specified address area. Column address strobe 0: Outputs \overline{CAS} strobe for DRAM when address is within specified address area.

Note : This device's built-in memory or built-in I/O cannot be accessed with the external DMA controller using the \overline{BUSRQ} and \overline{BUSAK} signals.

Table 2.2.1 Name and function in MCU mode (2/4)

Pin name	Number of pins	I/O	Function
P41 $\overline{CS1}$ $\overline{CAS1}$	1	I/O Output Output	Port 41: I/O port (with pull-up resistor) Chip select 1: Outputs 0 if address is within specified address area. Column address strobe 1: Outputs \overline{CAS} strobe for DRAM if address is within specified address area.
P42 $\overline{CS2}$ $\overline{CAS2}$	1	I/O Output Output	Port 42: I/O port (with pull-down resistor) Chip select 2: Outputs 0 if address is within specified address area. Column address strobe 2: Outputs \overline{CAS} strobe for DRAM if address is within specified address area.
P50 to P57 AN0 to AN7	8	Input Input	Port 5: Input port Analog input: Analog signal input for AD converter
VREFH	1	Input	Pin for high level reference voltage input to AD converter
VREFL	1	Input	Pin for low level reference voltage input to AD converter
P60 TXD2	1	I/O Input	Port 60: I/O port (with pull-up resistor) Serial send data 2
P61 RXD2	1	I/O Input	Port 61: I/O port (with pull-up resistor) Serial receive data 2
P62 $\overline{CTS2}$ SCLK2	1	I/O Input I/O	Port 62: I/O port (with pull-up resistor) Serial data send enable 2 (Clear To Send) Serial clock I/O 2
P63 TXD3	1	I/O Input	Port 63: I/O port (with pull-up resistor) Serial send data 3
P64 RXD3	1	I/O Input	Port 64: I/O port (with pull-up resistor) Serial receive data 3
P65 $\overline{CTS3}$ SCLK3	1	I/O Input I/O	Port 65: I/O port (with pull-up resistor) Serial data send enable 3 (Clear To Send) Serial clock I/O 3
P66 TXD4	1	I/O Input	Port 66: I/O port (with pull-up resistor) Serial send data 4
P67 RXD4	1	I/O Input	Port 67: I/O port (with pull-up resistor) Serial receive data 4
P70 TI0	1	I/O Input	Port 70: I/O port (with pull-up resistor) Timer input 0: Timer 0 input
P71 TO1	1	I/O Output	Port 71: I/O port (with pull-up resistor) Timer output 1: Timer 0 or 1 output
P72 TO2	1	I/O Output	Port 72: I/O port (with pull-up resistor) PWM output 2: 8-bit PWM timer 2 output
P73 TO3	1	I/O Output	Port 73: I/O port (with pull-up resistor) PWM output 3: 8-bit PWM timer 3 output

Table 2.2.1 Name and function in MCU mode (3/4)

Pin name	Number of pins	I/O	Function
P80 TI4 INT4	1	I/O Input Input	Port 80: I/O port (with pull-up resistor) Timer input 4: Timer 4 count / capture trigger signal input Interrupt request pin 4: Interrupt request pin with programmable rising / falling edge
P81 TI5 INT5	1	I/O Input Input	Port 81: I/O port (with pull-up resistor) Timer input 5: Timer 4 count / capture trigger signal input Interrupt request pin 5: Interrupt request pin with rising edge
P82 TO4	1	I/O Output	Port 82: I/O port (with pull-up resistor) Timer output 4: Timer 4 output pin
P83 TO5	1	I/O Output	Port 83: I/O port (with pull-up resistor) Timer output 5: Timer 4 output pin
P84 TI6 INT6	1	I/O Input Input	Port 84: I/O port (with pull-up resistor) Timer input 6: Timer 5 count / capture trigger signal input Interrupt request pin 6: Interrupt request pin with programmable rising / falling edge
P85 TI7 INT7	1	I/O Input Input	Port 85: I/O port (with pull-up resistor) Timer input 7: Timer 5 count / capture trigger signal input Interrupt request pin 7: Interrupt request pin with rising edge
P86 TO6	1	I/O Output	Port 86: I/O port (with pull-up resistor) Timer output 6: Timer 5 output pin
P87 INT0	1	I/O Input	Port 87: I/O port (with pull-up resistor) Interrupt request pin 0: Interrupt request pin with programmable level / rising edge
P90 TXD0	1	I/O Output	Port 90: I/O port (with pull-up resistor) Serial send data 0
P91 RXD0	1	I/O Input	Port 91: I/O port (with pull-up resistor) Serial receive data 0
P92 CTS0 SCLK0	1	I/O Input I/O	Port 92: I/O port (with pull-up resistor) Serial data send enable 0 (Clear to Send) Serial Clock I/O 0
P93 TXD1	1	I/O Output	Port 93: I/O port (with pull-up resistor) Serial send data 1
P94 RXD1	1	I/O Input	Port 94: I/O port (with pull-up resistor) Serial receive data 1
P95 SCLK1	1	I/O I/O	Port 95: I/O port (with pull-up resistor) Serial clock I/O 1
PA0 to PA5	6	I/O	Port A0 to A5: I/O ports (large current output)
PA6	1	I/O	Port A6 : I/O port

Table 2.2.1 Name and function in MCU mode (4/4)

Pin name	Number of pins	I/O	Function
PA7 SCOUT	1	I/O Output	Port A7: I/O port System Clock Output: Outputs system clock or 2 oscillation clock for synchronizing to external circuit.
$\overline{\text{WDTOU}}\overline{\text{T}}$	1	Output	Watchdog timer output pin
$\overline{\text{NMI}}$	1	Input	Non-maskable interrupt request pin: Interrupt request pin with falling edge. Can also be operated at rising edge by program.
CLK	1	Output	Clock output: Outputs $\lceil \text{System Clock} \div 2 \rceil$ Clock. Pulled-up during reset. can be disabled for reducing noise.
$\overline{\text{EA}}$	1	Input	Fixed to "1".
AM8 / $\overline{\text{T6}}$	1	Input	Fixed to "1".
ALE	1	Output	Address Latch Enable (Can be disabled for reducing noise.)
$\overline{\text{RESET}}$	1	Input	Reset: Initializes LSI. (With pull-up resistor)
X1/X2	2	I/O	High Frequency Oscillator connecting pin
XT1 P96	1	Input I/O	Low Frequency Oscillator connecting pin Port 96: I/O port (Open Drain Output)
XT2 P97	1	Output I/O	Low Frequency Oscillator connecting pin Port 97: I/O port (Open Drain Output)
TEST1 / TEST2	2	Output / Input	TEST1 Should be connected with TEST2 pin.
VCC	3		Power supply pin
VSS	3		GND pin (0 V)
AVCC	1		Power supply pin for AD converter
AVSS	1		GND pin for AD converter (0 V)

Note : Built-in pull-up / pull-down resistors can be released from the pins other than the $\overline{\text{RESET}}$ pin by software.

2.3 PROM mode

Table 2.3.1 Name and function of PROM mode

Pin function	Number of pins	Input / Output	Function	Pin name (MCU mode)
A7 to A0	8	Input	Memory address of program	P27 to P20
A15 to A8	8	Input		P17 to P10
A16	1	Input		P33
D7 to D0	8	I/O	Memory data of program	P07 to P00
$\overline{\text{CE}}$	1	Input	Chip enable	P32
$\overline{\text{OE}}$	1	Input	Output enable	P30
$\overline{\text{PGM}}$	1	Input	Program control	P31
VPP	1	Power supply	12.75 V / 5 V (Power supply of program)	$\overline{\text{EA}}$
VCC	4	Power supply	6.25 V / 5 V	VCC, AVCC
VSS	4	Power supply	0 V	VSS, AVSS
Pin function	Number of pins	Input / Output	Pin state	
P34	1	Input	Fix to low level (security pin)	
$\overline{\text{RESET}}$	1	Input	Fix to low level (PROM mode)	
CLK	1	Input		
ALE	1	Output	Open	
X1	1	Input	Self oscillation with resonator	
X2	1	Output		
P42 to P40 P37 to P35 AM8 / $\overline{\text{T6}}$	7	Input	Fix to high level	
TEST1 / TEST2	2	Input / Output	Short	
P57 to P50 P67 to P60 P73 to P70 P87 to P80 P97 to P90 PA7 to PA0 VREFH VREFL $\overline{\text{NMI}}$ $\overline{\text{WDTOUT}}$	48	I/O	Open	

3. Operation

This section describes the functions and basic operational blocks of the TMP93PW46A.

The TMP93PW46A has PROM in place of the mask ROM which is included in the TMP93CW46A. The other configuration and functions are the same as the TMP93CW46A. Regarding the function of the TMP93PW46A, which is not described herein, see the TMP93CW46A.

The TMP93PW46A has two operational modes: MCU mode and PROM mode.

3.1 MCU mode

(1) Mode-setting and function

The MCU mode is set by releasing the CLK pin (Pin open). In the MCU mode, the operation is the same as TMP93CW46A.

(2) Memory-map

The memory map of TMP93PW46A is the same as that of TMP93CW46A. The memory map in MCU mode is shown in Figure 3.2.1, and the memory map in PROM mode is shown in Figure 3.2.2.

3.2 Memory Map

Figure 3.2.1, 3.2.2 are the memory map of the TMP93PW46A.

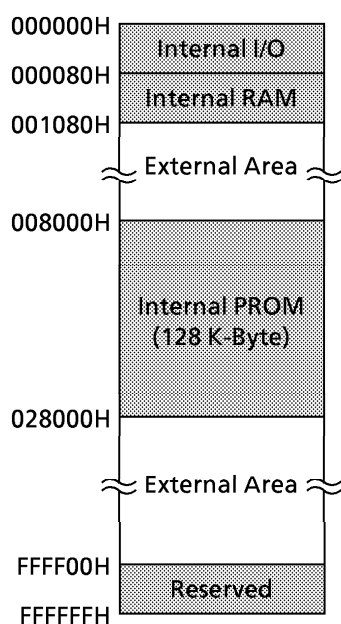


Figure 3.2.1 Memory map in MCU mode

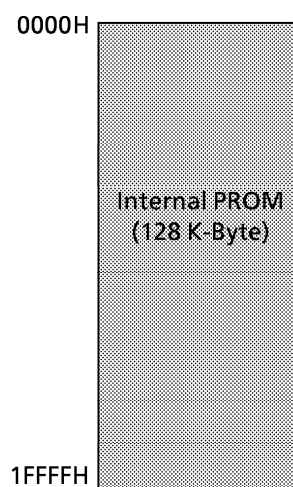


Figure 3.2.2 Memory map in PROM mode

4. Electrical Characteristic

4.1 Absolute Maximum Ratings

X used in an expression shows a frequency of clock f_{PPI} selected by SYSCR1 <SYSCK>. If a clock gear or a low speed oscillator is selected, a value of "X" is different. The value as an example is calculated at $f_{c\ gear} = 1/f_c(\text{SYSCR1} <\text{SYSCK}, \text{GEAR2 to 0} > = "0000")$.

Parameter	Symbol	Rating	Unit
Power Supply Voltage	V_{CC}	- 0.5 to 6.5	V
Input Voltage	V_{IN}	- 0.5 to $V_{CC} + 0.5$	V
Output Current (per one pin), Ports PA0 to 5	I_{OL1}	20	mA
Output Current (per one pin), excluding Ports PA0 to 5	I_{OL2}	2	mA
Output Current (total of Ports PA0 to 5)	ΣI_{OL1}	80	mA
Output Current (total)	ΣI_{OL}	120	mA
Output Current (total)	ΣI_{OH}	- 80	mA
Power Dissipation ($T_a = 85^\circ\text{C}$)	P_D	600	mW
Soldering Temperature (10 s)	T_{SOLDER}	260	$^\circ\text{C}$
Storage Temperature	T_{STG}	- 65 to 150	$^\circ\text{C}$
Operating Temperature	T_{OPR}	- 40 to 85	$^\circ\text{C}$

Note: The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

4.2 DC Characteristics (1/2) ($V_{SS} = 0\text{V}$, $T_a = -40$ to 85°C)

Parameter	Symbol	Condition	Min	Typ. (Note)	Max	Unit
Power Supply Voltage ($A_{V_{CC}} = V_{CC}$) ($A_{V_{SS}} = V_{SS}$)	V_{CC}	$f_c = 4$ to 20 MHz $f_s = 30$ to 34 kHz	4.5		5.5	V
Input Low Voltage	AD0 to 15	$V_{CC} \geq 4.5\text{V}$ $V_{CC} < 4.5\text{V}$			0.8 0.6	V
	Port2 to A (except P87)	$V_{CC} = 2.7$ to 5.5V	-0.3		$0.3 V_{CC}$	
	RESET, NMI, INT0				$0.25 V_{CC}$	
	EA, AM8/16				0.3	
	X1				$0.2 V_{CC}$	
Input High Voltage	AD0 to 15	$V_{CC} \geq 4.5\text{V}$ $V_{CC} < 4.5\text{V}$	2.2 2.0		$V_{CC} + 0.3$	
	Port2 to A (except P87)	$V_{CC} = 2.7$ to 5.5V				$0.7 V_{CC}$
	RESET, NMI, INT0					$0.75 V_{CC}$
	EA, AM8/16					$V_{CC} - 0.3$
	X1					$0.8 V_{CC}$

Note: Typical values are for $T_a = 25^\circ\text{C}$ and $V_{CC} = 5\text{V}$ unless otherwise noted.

4.2 DC Characteristics (2/2) (V_{SS} = 0V, T_a = -40 to 85°C)

Parameter	Symbol	Condition	Min	Typ. (Note1)	Max	Unit
Output Low Voltage	V _{OL}	I _{OL} = 1.6 mA (V _{CC} = 2.7 to 5.5 V)			0.45	V
Output Low Current (PA0 to 5)	I _{OLA}	V _{OL} = 1.0 V (V _{CC} = 2.7 to 5.5 V)	10			mA
Output High Voltage	V _{OH1}	I _{OH} = -400 μA (V _{CC} = 3 V ± 10%)	2.4			V
	V _{OH2}	I _{OH} = -400 μA (V _{CC} = 5 V ± 10%)	4.2			
Darlington Drive Current (8 Output Pins Max)	I _{DAR} (Note2)	V _{EXT} = 1.5 V R _{EXT} = 1.1 kΩ (V _{CC} = 5 V ± 10% only)	-1.0		-3.5	mA
Input Leakage Current	I _{LI}	0.0 ≤ V _{IN} ≤ V _{CC}		0.02	± 5	μA
Output Leakage Current	I _{LO}	0.2 ≤ V _{IN} ≤ V _{CC} - 0.2		0.05	± 10	
Power Down Voltage (at STOP, RAM Back up)	V _{STOP}	V _{IL2} = 0.2 V _{CC} , V _{IH2} = 0.8 V _{CC}	2.0		6.0	V
RESET Pull Up Resister	R _{RST}	V _{CC} = 5 V ± 10% ----- V _{CC} = 3 V ± 10%	50 80		150 200	kΩ
Pin Capacitance	C _{IO}	f _c = 1 MHz			10	pF
Schmitt Width RESET, NMI, INTO	V _{TH}		0.4	1.0		V
Programmable Pull Down Resistor	R _{KL}	V _{CC} = 5 V ± 10% ----- V _{CC} = 3 V ± 10%	10 30		80 150	kΩ
Programmable Pull Up Resistor	R _{KH}	V _{CC} = 5 V ± 10% ----- V _{CC} = 3 V ± 10%	50 100		150 300	
NORMAL (Note 3) RUN IDLE2 IDLE1	I _{CC}	V _{CC} = 5 V ± 10% f _c = 20 MHz		35	42	mA
				30	37	
				18	25	
				3.5	5	
NORMAL (Note 3) RUN IDLE2 IDLE1		V _{CC} = 3 V ± 10% f _c = 12.5 MHz (Typ. : V _{CC} = 3.0 V)		11	16	mA
				9	13.5	
				5.5	7.5	
				1	1.5	
SLOW (Note 3) RUN IDLE2 IDLE1		V _{CC} = 3 V ± 10% f _s = 32.768 kHz (Typ. : V _{CC} = 3.0 V)		35	50	μA
				28	42	
				20	33	
				9	15	
STOP		T _a ≤ 50°C			10	μA
		T _a ≤ 70°C		0.2	20	
		T _a ≤ 85°C			50	

Note 1: Typical values are for T_a = 25°C and V_{CC} = 5 V unless otherwise noted.

Note 2: I-DAR is guaranteed for total of up to 8 ports.

4.3 AC Characteristics

(1) $V_{CC} = 5V \pm 10\%$

No.	Parameter	Symbol	Variable		16 MHz		20 MHz		Unit
			Min	Max	Min	Max	Min	Max	
1	Osc. Period (= x)	t _{Osc}	50 ns	33.3 μ s	62.5 ns		50 ns		
2	CLK pulse width	t _{CLK}	2x - 40		85		60		ns
3	A0 to 23 Valid \rightarrow CLK Hold	t _{AK}	0.5x - 20		11		5		ns
4	CLK Valid \rightarrow A0 to 23 Hold	t _{KA}	1.5x - 70		24		5		ns
5	A0 to 15 Valid \rightarrow ALE fall	t _{AL}	0.5x - 15		16		10		ns
6	ALE fall \rightarrow A0 to 15 Hold	t _{LA}	0.5x - 20		11		5		ns
7	ALE High pulse width	t _{LL}	x - 40		23		10		ns
8	ALE fall \rightarrow RD/WR fall	t _{LC}	0.5x - 25		6		0		ns
9	RD/WR rise \rightarrow ALE rise	t _{CL}	0.5x - 20		11		5		ns
10	A0 to 15 Valid \rightarrow RD/WR fall	t _{ACL}	x - 25		38		25		ns
11	A0 to 23 Valid \rightarrow RD/WR fall	t _{ACH}	1.5x - 50		44		25		ns
12	RD/WR rise \rightarrow A0 to 23 Hold	t _{CA}	0.5x - 25		6		0		ns
13	A0 to 15 Valid \rightarrow D0 to 15 input	t _{ADL}		3.0x - 55		133		95	ns
14	A0 to 23 Valid \rightarrow D0 to 15 input	t _{ADH}		3.5x - 65		154		110	ns
15	RD fall \rightarrow D0 to 15 input	t _{RD}		2.0x - 60		65		40	ns
16	RD Low pulse width	t _{RR}	2.0x - 40		85		60		ns
17	RD rise \rightarrow D0 to 15 Hold	t _{HR}	0		0		0		ns
18	RD rise \rightarrow A0 to 15 output	t _{RAE}	x - 15		48		35		ns
19	WR Low pulse width	t _{WW}	2.0x - 40		85		60		ns
20	D0 to 15 Valid \rightarrow WR rise	t _{DW}	2.0x - 55		70		45		ns
21	WR rise \rightarrow D0 to 15 Hold	t _{WD}	0.5x - 15		16		10		ns
22	A0 to 23 Valid \rightarrow WAIT input ^(1 WAIT + n mode)	t _{AWH}		3.5x - 90		129		85	ns
23	A0 to 15 Valid \rightarrow WAIT input ^(1 WAIT + n mode)	t _{AWL}		3.0x - 80		108		70	ns
24	RD/WR fall \rightarrow WAIT Hold ^(1 WAIT + n mode)	t _{CW}	2.0x + 0		125		100		ns
25	A0 to 23 Valid \rightarrow PORT input	t _{APH}		2.5x - 120		36		5	ns
26	A0 to 23 Valid \rightarrow PORT Hold	t _{APH2}	2.5x + 50		206		175		ns
27	WR rise \rightarrow PORT Valid	t _{CP}		200		200		200	ns
28	A0 to 23 Valid \rightarrow RAS fall	t _{ASRH}	1.0x - 40		23		10		ns
29	A0 to 15 Valid \rightarrow RAS fall	t _{ASRL}	0.5x - 15		16		10		ns
30	RAS fall \rightarrow D0 to 15 input	t _{RAC}		2.5x - 70		86		55	ns
31	RAS fall \rightarrow A0 to 15 Hold	t _{RAH}	0.5x - 15		16		10		ns
32	RAS Low pulse width	t _{RAS}	2.0x - 40		85		60		ns
33	RAS High pulse width	t _{RP}	2.0x - 40		85		60		ns
34	CAS fall \rightarrow RAS rise	t _{RSH}	1.0x - 40		23		10		ns
35	RAS rise \rightarrow CAS rise	t _{RSC}	0.5x - 25		6		0		ns
36	RAS fall \rightarrow CAS fall	t _{RCD}	1.0x - 40		23		10		ns
37	CAS fall \rightarrow D0 to 15 input	t _{CAC}		1.5x - 65		29		10	ns
38	CAS Low pulse width	t _{CAS}	1.5x - 30		64		40		ns

AC Measuring Conditions

- Output Level : High 2.2 V / Low 0.8 V , CL = 50 pF
(However CL = 100 pF for AD0 to AD15, A0 to A23, ALE, RD, WR, HWR, R/W, CLK, RAS, CAS0 to CAS2)
- Input Level : High 2.4 V / Low 0.45 V (AD0 to AD15)
High $0.8 \times V_{CC}$ / Low $0.2 \times V_{CC}$ (Except for AD0 to AD15)


(2) $V_{CC} = 3V \pm 10\%$

No.	Parameter	Symbol	Variable		12.5 MHz		Unit
			Min	Max	Min	Max	
1	Osc. Period (= x)	t_{OSC}	80 ns	33.3 μs	80 ns		
2	CLK pulse width	t_{CLK}	2x - 40		120		ns
3	A0 to 23 Valid \rightarrow CLK Hold	t_{AK}	0.5x - 30		10		ns
4	CLK Valid \rightarrow A0 to 23 Hold	t_{KA}	1.5x - 80		40		ns
5	A0 to 15 Valid \rightarrow ALE fall	t_{AL}	0.5x - 35		5		ns
6	ALE fall \rightarrow A0 to 15 Hold	t_{LA}	0.5x - 35		5		ns
7	ALE High pulse width	t_{LL}	x - 60		20		ns
8	ALE fall \rightarrow RD/WR fall	t_{LC}	0.5x - 35		5		ns
9	RD/WR rise \rightarrow ALE rise	t_{CL}	0.5x - 40		0		ns
10	A0 to 15 Valid \rightarrow RD/WR fall	t_{ACL}	x - 50		30		ns
11	A0 to 23 Valid \rightarrow RD/WR fall	t_{ACH}	1.5x - 50		70		ns
12	RD/WR rise \rightarrow A0 to 23 Hold	t_{CA}	0.5x - 40		0		ns
13	A0 to 15 Valid \rightarrow D0 to 15 input	t_{ADL}		3.0x - 110		130	ns
14	A0 to 23 Valid \rightarrow D0 to 15 input	t_{ADH}		3.5x - 125		155	ns
15	RDfall \rightarrow D0 to 15 input	t_{RD}		2.0x - 115		45	ns
16	RD Low pulse width	t_{RR}	2.0x - 40		120		ns
17	RDrise \rightarrow D0 to 15 Hold	t_{HR}	0		0		ns
18	RDrise \rightarrow A0 to 15output	t_{RAE}	x - 25		55		ns
19	WR Low pulse width	t_{WW}	2.0x - 40		120		ns
20	D0 to 15 Valid \rightarrow WRrise	t_{DW}	2.0x - 120		40		ns
21	WR rise \rightarrow D0 to 15 Hold	t_{WD}	0.5x - 40		0		ns
22	A0 to 23 Valid \rightarrow WAIT input ^(1 WAIT + n mode)	t_{AWH}		3.5x - 130		150	ns
23	A0 to 15 Valid \rightarrow WAIT input ^(1 WAIT + n mode)	t_{AWL}		3.0x - 100		140	ns
24	RD/WR fall \rightarrow WAIT Hold ^(1 WAIT + n mode)	t_{CW}	2.0x + 0		160		ns
25	A0 to 23 Valid \rightarrow PORT input	t_{APH}		2.5x - 195		5	ns
26	A0 to 23 Valid \rightarrow PORT Hold	t_{APH2}	2.5x + 50		250		ns
27	WR rise \rightarrow PORT Valid	t_{CP}		200		200	ns
28	A0 to 23 Valid \rightarrow RAS fall	t_{ASRH}	1.0x - 60		20		ns
29	A0 to 15 Valid \rightarrow RAS fall	t_{ASRL}	0.5x - 40		0		ns
30	RAS fall \rightarrow D0 to 15 input	t_{RAC}		2.5x - 90		110	ns
31	RAS fall \rightarrow A0 to 15 Hold	t_{RAH}	0.5x - 25		15		ns
32	RAS Low pulse width	t_{RAS}	2.0x - 40		120		ns
33	RAS High pulse width	t_{RP}	2.0x - 40		120		ns
34	CAS fall \rightarrow RAS rise	t_{RSH}	1.0x - 55		25		ns
35	RAS rise \rightarrow CAS rise	t_{RSC}	0.5x - 25		15		ns
36	RAS fall \rightarrow CAS fall	t_{RCD}	1.0x - 40		40		ns
37	CAS fall \rightarrow D0 to 15 input	t_{CAC}		1.5x - 120		0	ns
38	CAS Low pulse width	t_{CAS}	1.5x - 40		80		ns


AC Measuring Conditions

- Output Level : High $0.7 \times V_{CC}$ / Low $0.3 \times V_{CC}$, CL = 50 pF
- Input Level : High $0.9 \times V_{CC}$ / Low $0.1 \times V_{CC}$

(1) Read Cycle

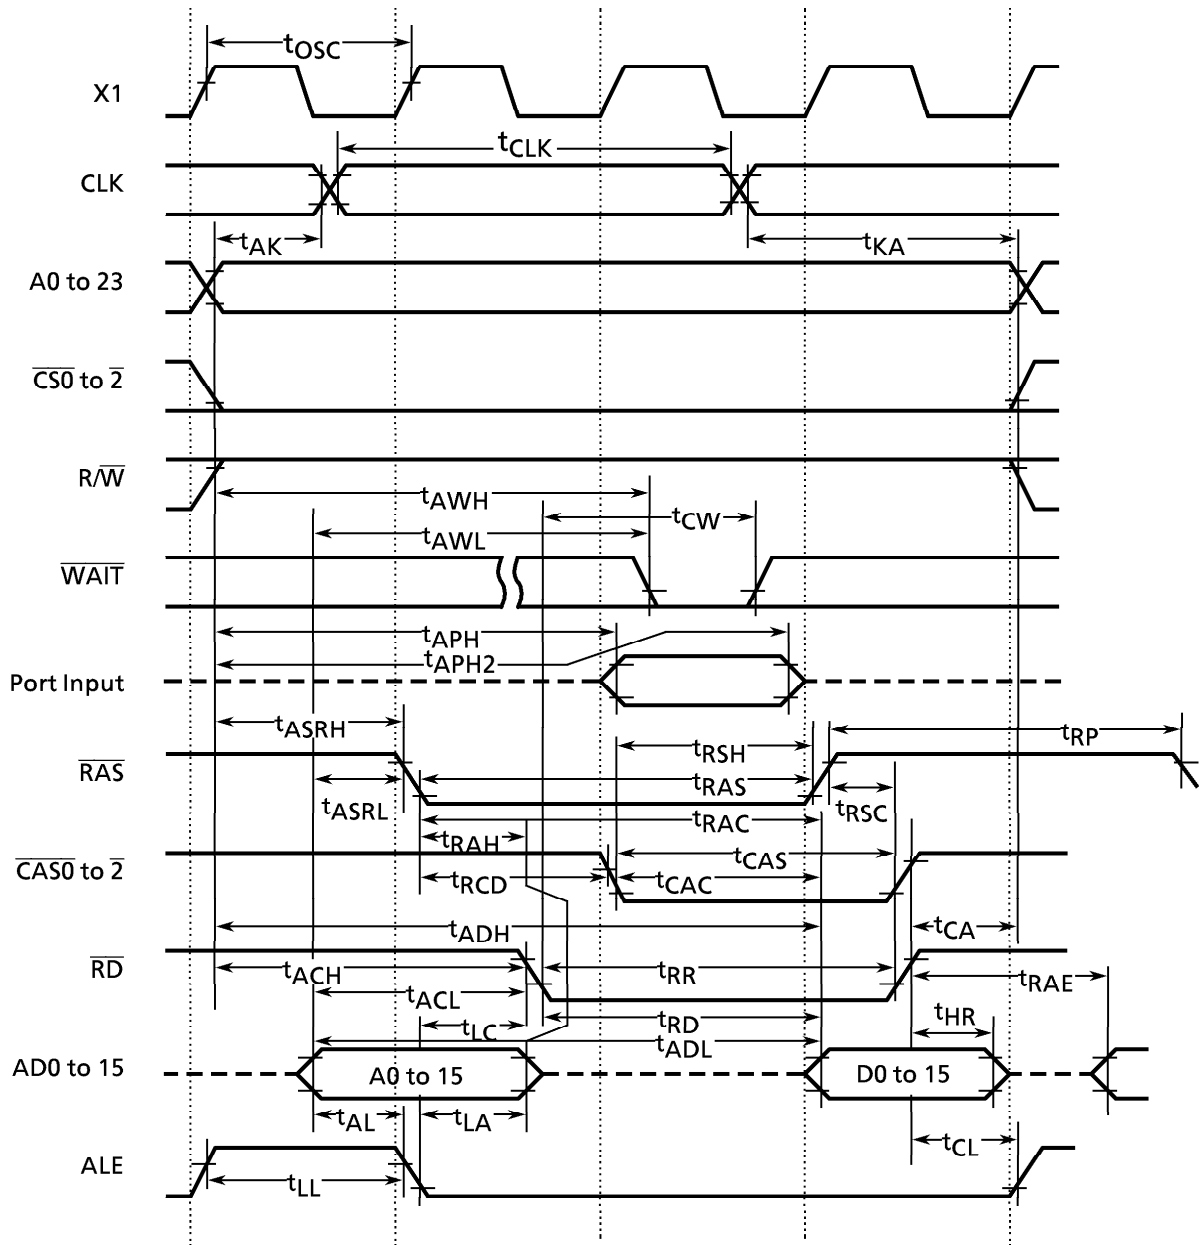

(2) Write Cycle

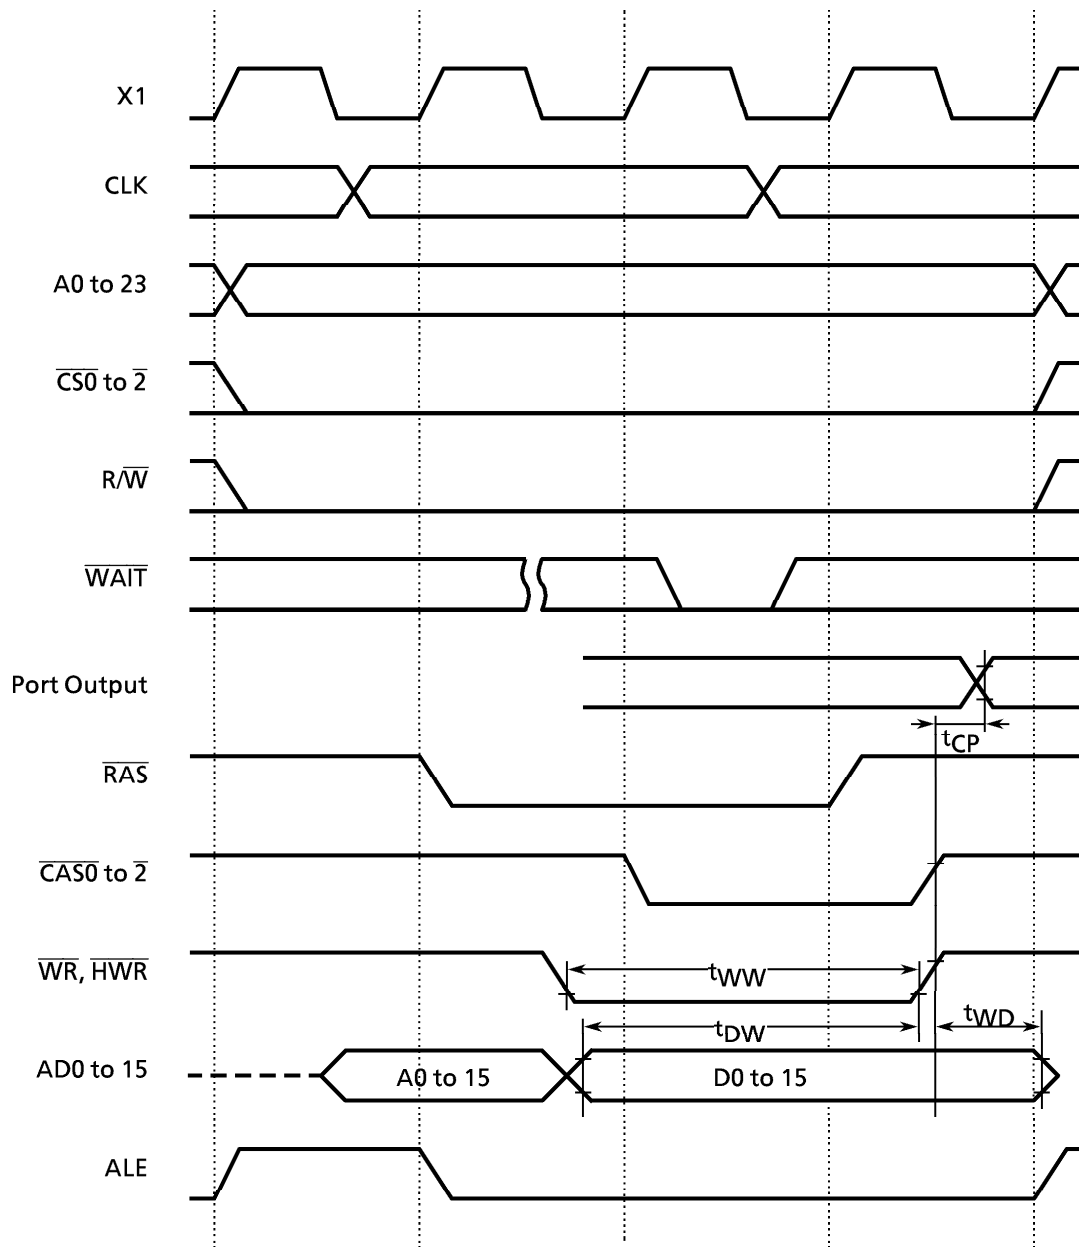

4.4 AD Conversion Characteristics ($V_{SS} = 0V$, $T_a = -40$ to $85^\circ C$, AV_{CC} , $AV_{SS} = V_{SS}$)

Parameter	Symbol	Power Supply	Min	Typ.	Max	Unit
Analog reference voltage (+)	V_{REFH}	$V_{CC} = 5V \pm 10\%$	$V_{CC} - 1.5V$	V_{CC}	V_{CC}	V
		$V_{CC} = 3V \pm 10\%$	$V_{CC} - 0.2V$	V_{CC}	V_{CC}	
Analog reference voltage (-)	V_{REFL}	$V_{CC} = 5V \pm 10\%$	V_{SS}	V_{SS}	$V_{SS} + 0.2V$	
		$V_{CC} = 3V \pm 10\%$	V_{SS}	V_{SS}	$V_{SS} + 0.2V$	
Analog input voltage range	V_{AIN}		V_{REFL}		V_{REFH}	
Analog current for analog reference voltage $\langle V_{REFON} \rangle = 1$	I_{REF} ($V_{REFL} = 0V$)	$V_{CC} = 5V \pm 10\%$		0.5	1.5	
		$V_{CC} = 3V \pm 10\%$		0.3	0.9	
$\langle V_{REFON} \rangle = 0$		$V_{CC} = 2.7$ to $5.5V$		0.02	5.0	μA
Error	-	$V_{CC} = 5V \pm 10\%$		± 1.0	± 3.0	LSB
		$V_{CC} = 3V \pm 10\%$		± 1.0	± 3.0	

Note 1: $1LSB = (V_{REFH} - V_{REFL}) / 2^{10} [V]$

Note 2: Minimum operation frequency

The operation of the AD converter is guaranteed only when f_c (high frequency oscillator) is used. (It is not guaranteed when f_s is used.) Additionally, it is guaranteed with $f_{FPH} \geq 4MHz$.

Note 3: The value I_{CC} includes the current which flows through AV_{CC} pin.

Note 4: Error excludes quantizing errors.

4.5 Serial Channel Timing (I/O Interface Mode)

(1) SCLK Input Mode

Parameter	Symbol	Variable		32.768 kHz (Note)		12.5 MHz		20 MHz	
		Min	Max	Min	Max	Min	Max	Min	Max
SCLK cycle	t_{SCY}	16X		488 μs		1.28 μs		0.8 μs	
Output Data → Rising edge of SCLK	t_{OSS}	$t_{SCY}/2 - 5X - 50$		91.5 μs		190 ns		100 ns	
SCLK rising edge → Output Data hold	t_{OHS}	$5X - 100$		152 μs		300 ns		150 ns	
SCLK rising edge → Input Data hold	t_{HSR}	0		0		0		0	
SCLK rising edge → effective data input	t_{SRD}		$t_{SCY} - 5X - 100$		336 μs		780 ns		450 ns

(2) SCLK Output Mode

Parameter	Symbol	Variable		32.768 kHz (Note)		12.5 MHz		20 MHz	
		Min	Max	Min	Max	Min	Max	Min	Max
SCLK cycle (programmable)	t_{SCY}	16X	8192X	488 μs	250 ms	1.28 μs	655.36 μs	0.8 μs	409.6 μs
Output Data → SCLK rising edge	t_{OSS}	$t_{SCY} - 2X - 150$		427 μs		970 ns		550 ns	
SCLK rising edge → Output Data hold	t_{OHS}	$2X - 80$		60 μs		80 ns		20 ns	
SCLK rising edge → Input Data hold	t_{HSR}	0		0		0		0	
SCLK rising edge → effective data input	t_{SRD}		$t_{SCY} - 2X - 150$		428 μs		970 ns		550 ns

(3) SCLK Input Mode (UART mode)

Parameter	Symbol	Variable		32.768 kHz (Note)		12.5 MHz		20 MHz	
		Min	Max	Min	Max	Min	Max	Min	Max
SCLK cycle	t_{SCY}	$4X + 20$		122 μs		340 ns		220 ns	
SCLK Low level Pulse width	t_{SCYL}	$2X + 5$		6 μs		165 ns		105 ns	
SCLK High level Pulse width	t_{SCYH}	$2X + 5$		6 μs		165 ns		105 ns	

Note : When f_s is used as system clock (f_{SYS}) or f_s is used as input clock to prescaler.

4.6 Timer / Counter Input Clock (T10, T14, T15, T16, T17)

Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
Clock Cycle	t_{VCK}	$8X + 100$		740		500		ns
Low level clock Pulse width	t_{VCKL}	$4X + 40$		360		240		ns
High level clock Pulse width	t_{VCKH}	$4X + 40$		360		240		ns

4.7 Interrupt and Capture

(1) \overline{NMI} , INT0 interrupt

Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
\overline{NMI} , INT0 Low level Pulse width	t_{INTAL}	$4X$		320		200		ns
\overline{NMI} , INT0 High level Pulse width	t_{INTAH}	$4X$		320		200		ns

(2) INT4 to 7 interrupt, capture


Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
INT4 to INT7 Low level Pulse width	t_{INTBL}	$4X + 100$		420		300		ns
INT4 to INT7 High level Pulse width	t_{INTBH}	$4X + 100$		420		300		ns

4.8 SCOUT pin AC characteristics


Parameter		Symbol	Variable		12.5 MHz		20 MHz		Unit
			Min	Max	Min	Max	Min	Max	
High to level pulse width	$V_{CC} = 5V \pm 10\%$	t_{SCH}	$0.5x - 10$		30		15		ns
High to level pulse width	$V_{CC} = 3V \pm 10\%$		$0.5x - 20$		20		—	—	
Low to level pulse width	$V_{CC} = 5V \pm 10\%$	t_{SCL}	$0.5x - 10$		30		15		ns
Low to level pulse width	$V_{CC} = 3V \pm 10\%$		$0.5x - 20$		20		—	—	

Measurement condition

- Output level : High 2.2 V / Low 0.8 V, $C_L = 10$ pF




4.9 Timing Chart for I/O Interface Mode

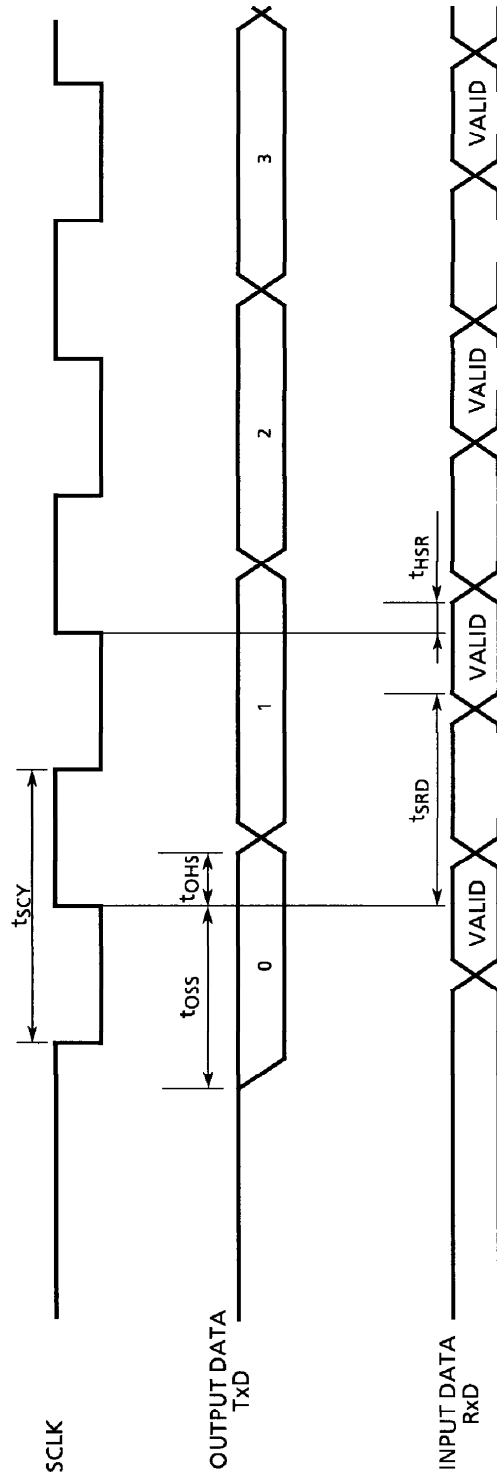

Note : SCLK is reversed in SCLK input falling mode.

4.10 Timing Chart for Bus Request (BUSRQ) / Bus Acknowledge (BUSAK)

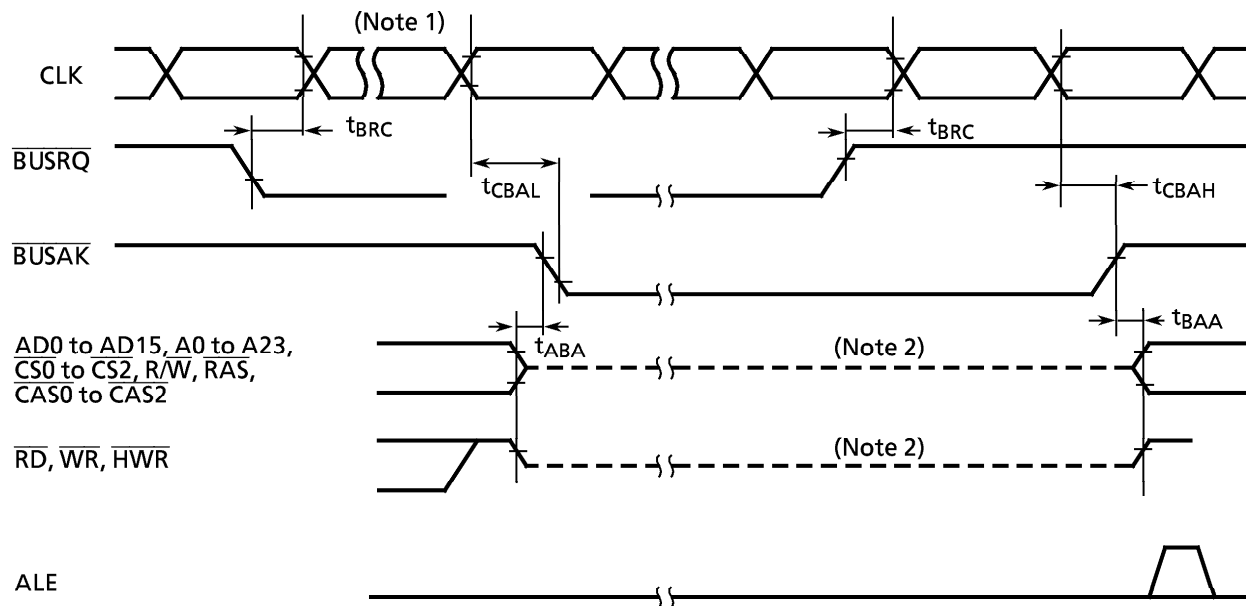

Parameter	Symbol	Variable		12.5 MHz		20 MHz		Unit
		Min	Max	Min	Max	Min	Max	
$\overline{\text{BUSRQ}}$ set to up time to CLK	t_{BRC}	120		120		120		ns
CLK \rightarrow $\overline{\text{BUSAK}}$ falling edge	t_{CBAL}		$1.5x + 120$		240		195	ns
CLK \rightarrow $\overline{\text{BUSAK}}$ rising edge	t_{CBAH}		$0.5x + 40$		80		65	ns
Output Buffer is off to $\overline{\text{BUSAK}}$ \downarrow	t_{ABA}	0	80	0	80	0	80	ns
$\overline{\text{BUSAK}}$ \uparrow to Output Buffer is on.	t_{BAA}	0	80	0	80	0	80	ns

Note 1: The Bus will be released after the $\overline{\text{WAIT}}$ request is inactive, when the $\overline{\text{BUSRQ}}$ is set to "0" during "Wait" cycle.

Note 2: This line only shows the output buffer is off to state.
 It doesn't indicate the signal level is fixed.
 Just after the bus is released, the signal level which is set before the bus is released is kept dynamically by the external capacitance. Therefore, to fix the signal level by an external resistor during bus releasing, designing is executed carefully because the level to fix will be delayed.
 The internal programmable pull-up/pull-down resistor is switched active/non-active by an internal signal.

4.11 Read operation in PROM mode

DC / AC characteristics

$T_a = 25 \pm 5^\circ\text{C}$ $V_{CC} = 5\text{V} \pm 10\%$

Parameter	Symbol	Condition	Min	Max	Unit
V _{PP} Read Voltage	V _{PP}	–	4.5	5.5	V
Input High Voltage (A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V _{IH1}	–	2.2	V _{CC} + 0.3	V
Input Low Voltage (A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V _{IL1}	–	–0.3	0.8	V
Address to Output Delay	t _{ACC}	C _L = 50 pF	–	2.25T _{CYC} + α	ns

T_{CYC} = 400 ns (10 MHz Clock)
α = 200 ns


4.12 Program operation in PROM mode

DC / AC characteristics

$T_a = 25 \pm 5^\circ\text{C}$ $V_{CC} = 6.25\text{V} \pm 0.25\text{V}$


Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Programing Supply Voltage	V _{PP}	–	12.50	12.75	13.00	V
Input High Voltage (D0 to D7, A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V _{IH}	–	2.6		V _{CC} + 0.3	V
Input Low Voltage (D0 to D7, A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V _{IL}	–	–0.3		0.8	V
V _{CC} Supply Current	I _{CC}	f _c = 10 MHz	–		50	mA
V _{PP} Supply Current	I _{PP}	V _{PP} = 13.00 V	–		50	mA
$\overline{\text{PGM}}$ Program Pulse Width	t _{PW}	C _L = 50 pF	0.095	0.1	0.105	ms

4.13 Timing chart of read operation in PROM mode

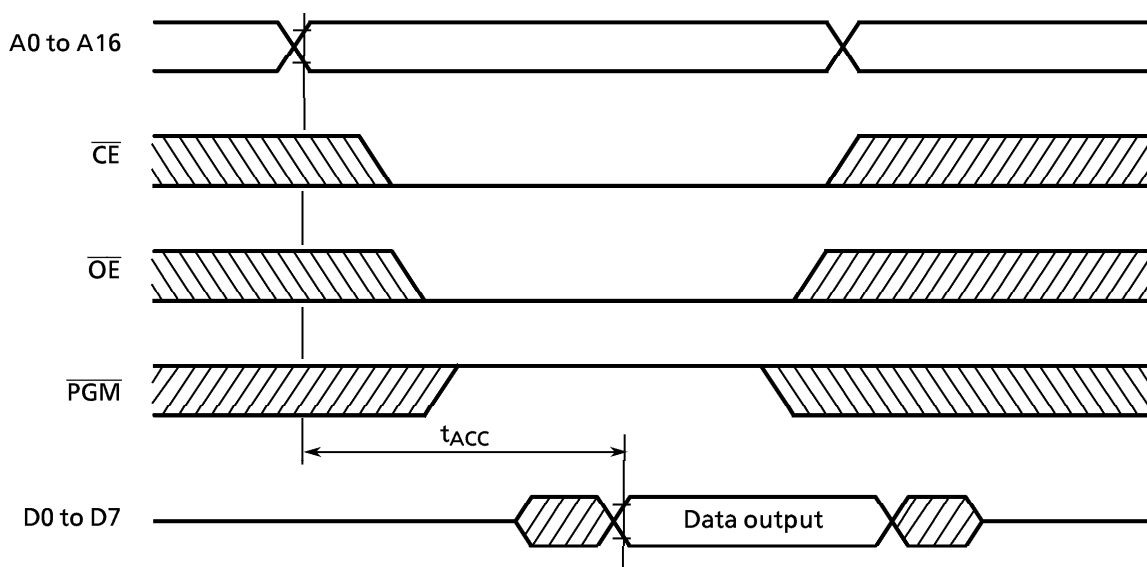

4.14 Timing chart of program operation in PROM mode

High-Speed Programming formula

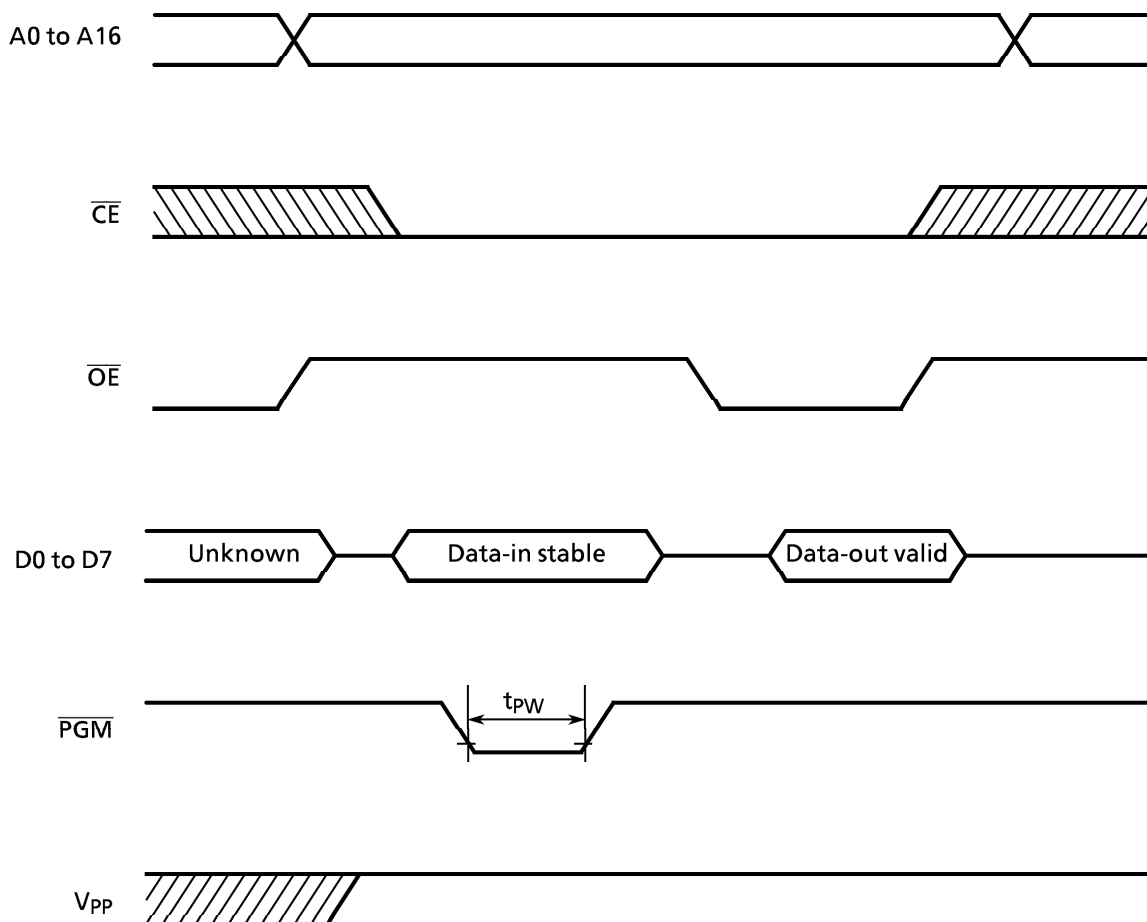

Note 1: The power supply of V_{PP} (12.75 V) must be turned on at the same time or the later time for a power supply of V_{CC} and must be clear power-on at the same time or early time for a power supply of V_{CC} .

Note 2: The pulling up/down device on condition of $V_{PP} = 12.75$ V suffers a damage for the device.

Note 3: The maximum spec of V_{PP} pin is 14.0 V. Be careful a overshoot at the programming.