


## Silicon Variable Capacitance Diode

BB 304A

### Preliminary Data

- For FM tuners
- Monolithic chip with common cathode for perfect tracking of both diodes
- Uniform "square law" characteristics
- Ideal Hifi tuning device when used in Low-distortion back-to back configuration
- Color-coded capacitance subgroups available (see characteristics)

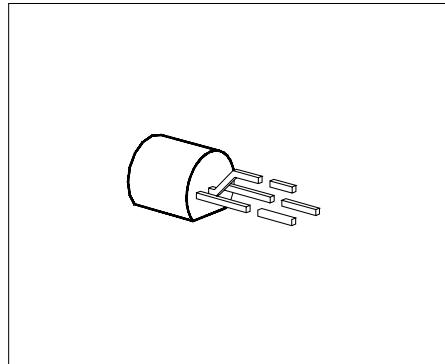

Type	Ordering Code (tape and reel)	Pin Configuration			Marking	Package
		1	2	3		
BB 304A	Q62702-B118	A1	C1/C2	A2	color coded capacitance groups	TO-92

### Maximum Ratings

Parameter	Symbol	Values	Unit
Reverse voltage	$V_R$	18	V
Peak reverse voltage ( $R \geq 10 \Omega$ )	$V_{RM}$	20	V
Forward current $T_A \leq 60^\circ\text{C}$	$I_F$	50	mA
Storage temperature range	$T_{stg}$	- 55 ... + 150	°C

### Thermal Resistance

Junction-ambient	$R_{th JA}$	$\leq$	K/W
------------------	-------------	--------	-----

**Electrical Characteristics**at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.


Parameter	Symbol	Value			Unit
		min.	typ.	max.	

**DC Characteristics**


Reverse current $V_R = 16 \text{ V}$ $V_R = 16 \text{ V}, T_A = 60^\circ\text{C}$	$I_R$	— —	— —	20 200	nA
Diode capacitance $V_R = 2 \text{ V}, f = 1 \text{ MHz}$	$C_T$	42	—	47.5	pF
Capacitance ratio $V_R = 2 \text{ V} \dots 8 \text{ V}, f = 1 \text{ MHz}$	$C_{T2}/C_{T8}$	1.65	—	— 1.75	—
Series resistance $V_R = 38 \text{ V}, f = 100 \text{ MHz}$	$r_s$	—	0.25	0.4	$\Omega$
Q factor $C_T = 38 \text{ pF}, f = 100 \text{ MHz}$	$Q$	100	170	—	—
Diode capacitance $V_R = 2 \text{ V}, f = 1 \text{ MHz}$ Subgroup: red yellow white green blue	$C_T$	42 43 44 45 46	— — — — —	43.5 44.5 45.5 46.5 47.5	pF

**Package Outline**


TO-92

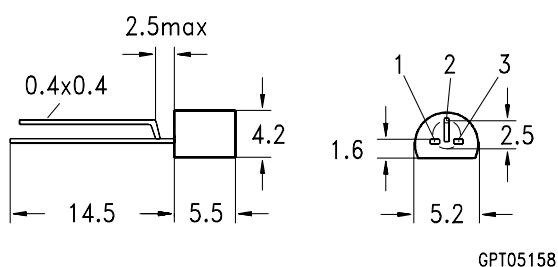

**Diode capacitance**  $C_T = f(V_R)$   
per diode  $f = 1 \text{ MHz}$

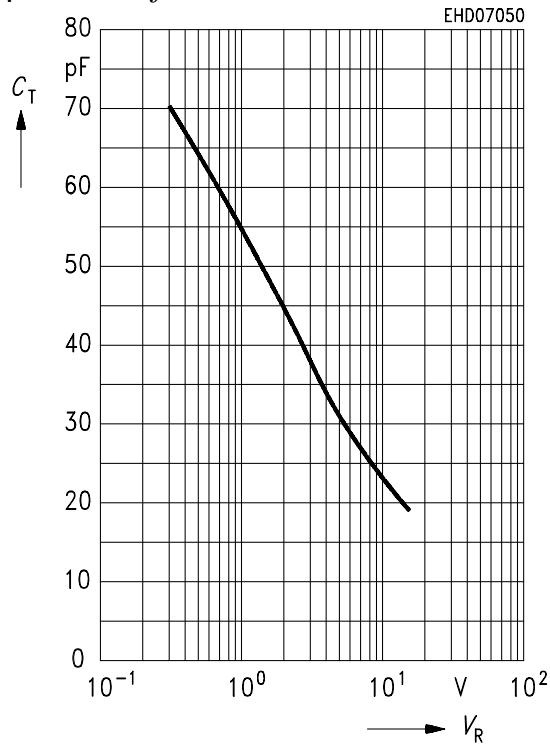

**Capacitance ratio**  $C_T/C_{T\text{ref}} = f(V_R)$   
per diode;  $V_{\text{ref}} = 1 \text{ V}, 2 \text{ V}, f = 1 \text{ MHz}$

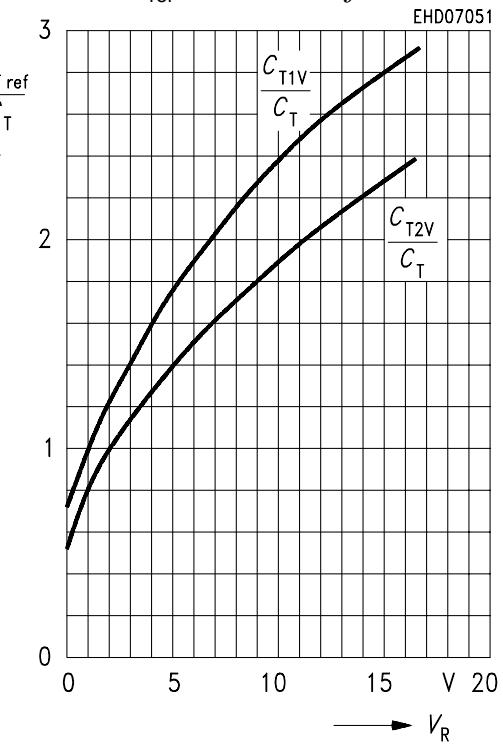

**Temperature coefficient**  $T_{CC} = f(V_R)$   
per diode,  $f = 1 \text{ MHz}$

