

# MB1504/MB1504H/MB1504L

## ASSP SERIAL INPUT PLL FREQUENCY SYNTHESIZER

### SERIAL INPUT PLL FREQUENCY SYNTHESIZER WITH 520MHz PRESCALER

The Fujitsu MB1504/MB1504H/MB1504L, utilizing BI-CMOS technology, is a single chip serial input PLL frequency synthesizer with pulse-swallow function.

The MB1504 series contains a 520MHz two modulus prescaler that can select either 32/33 or 64/65 divide ratio; control signal generator; 16-bit shift register; 15-bit latch; programmable reference divider (binary 14-bit programmable reference counter); 1-bit switch counter; phase comparator with phase inverse function; charge pump; crystal oscillator; 19-bit shift register; 18-bit latch; and a programmable divider (binary 7-bit swallow counter and binary 11-bit programmable counter).


The MB1504 operates from a low supply voltage (3V typ) and consumes low power (30mW at 520MHz).

#### MB1504 Product Line


|         | V <sub>P</sub> Voltage | V <sub>OOP</sub> Voltage | Lock up Time | D <sub>O</sub> Output Width | High-level Output Current | Low-level Output Current |
|---------|------------------------|--------------------------|--------------|-----------------------------|---------------------------|--------------------------|
| MB1504  | 8V max                 | 8.5V max                 | Middle speed | Middle                      | Middle                    | Middle                   |
| MB1504H | 10V max                | 10.0V max                | High speed   | Low                         | High                      | Low                      |
| MB1504L | 8V max                 | 8.5V max                 | Low speed    | High                        | Low                       | High                     |

#### FEATURES

- High operating frequency:  $f_{IN\ MAX}=520MHz$  ( $V_{IN\ MIN}=0.20V_{P-P}$ )
- On-chip prescaler
- Low power supply voltage: 2.7V to 5.5V (3.0V typ)
- Low power supply consumption: 30mW (3.0V, 520MHz operation)
- Serial input 18-bit programmable divider consisting of:
  - Binary 7-bit swallow counter (Divide ratio: 0 to 127)
  - Binary 11-bit programmable counter (Divide ratio: 16 to 2047)
- Serial input 15-bit programmable reference divider consisting of:
  - Binary 14-bit programmable reference counter (Divide ratio: 8 to 16383)
  - 1-bit switch counter (SW) Sets divide ratio of prescaler
- 2 types of phase detector output
  - On-chip charge pump (Bipolar type)
  - Output for external charge pump
- Wide operating temperature:  $T_A=-40^{\circ}C$  to  $+85^{\circ}C$



**PLASTIC PACKAGE  
DIP-16P-M04**




**PLASTIC PACKAGE  
FPT-16P-M06**

This device contains circuitry to protect the inputs against damage due to high static voltages or electric fields. However, it is advised that normal precautions be taken to avoid application of any voltage higher than maximum rated voltages to this high impedance circuit.

MB1504  
MB1504H  
MB1504L

PIN ASSIGNMENT

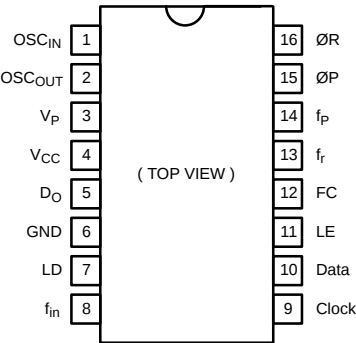


ABSOLUTE MAXIMUM RATINGS (see NOTE)

| Rating               | Symbol                             | Condition    | Value                        | Unit |
|----------------------|------------------------------------|--------------|------------------------------|------|
| Power Supply Voltage | V <sub>CC</sub>                    | —            | −0.5 to +7.0                 | V    |
|                      | V <sub>PH</sub>                    | MB1504H      | V <sub>CC</sub> to 12.0      | V    |
|                      | V <sub>P</sub> V <sub>PL</sub>     | MB1504/1504L | V <sub>CC</sub> to 10.0      | V    |
| Output Voltage       | V <sub>OUT</sub>                   | —            | −0.5 to V <sub>CC</sub> +0.5 | V    |
| Open-drain Output    | V <sub>OOPH</sub>                  | MB1504H      | −0.5 to 11.0                 | V    |
|                      | V <sub>OOP</sub> V <sub>OOPL</sub> | MB1504/1504L | −0.5 to 9.0                  | V    |
| Output Current       | I <sub>OUT</sub>                   | —            | +10                          | mA   |
| Storage Temperature  | T <sub>STG</sub>                   | —            | −55 to +125                  | °C   |

**NOTE:** Permanent device damage may occur if the above **Absolute Maximum Ratings** are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

MB1504/MB1504H/MB1504L BLOCK DIAGRAM

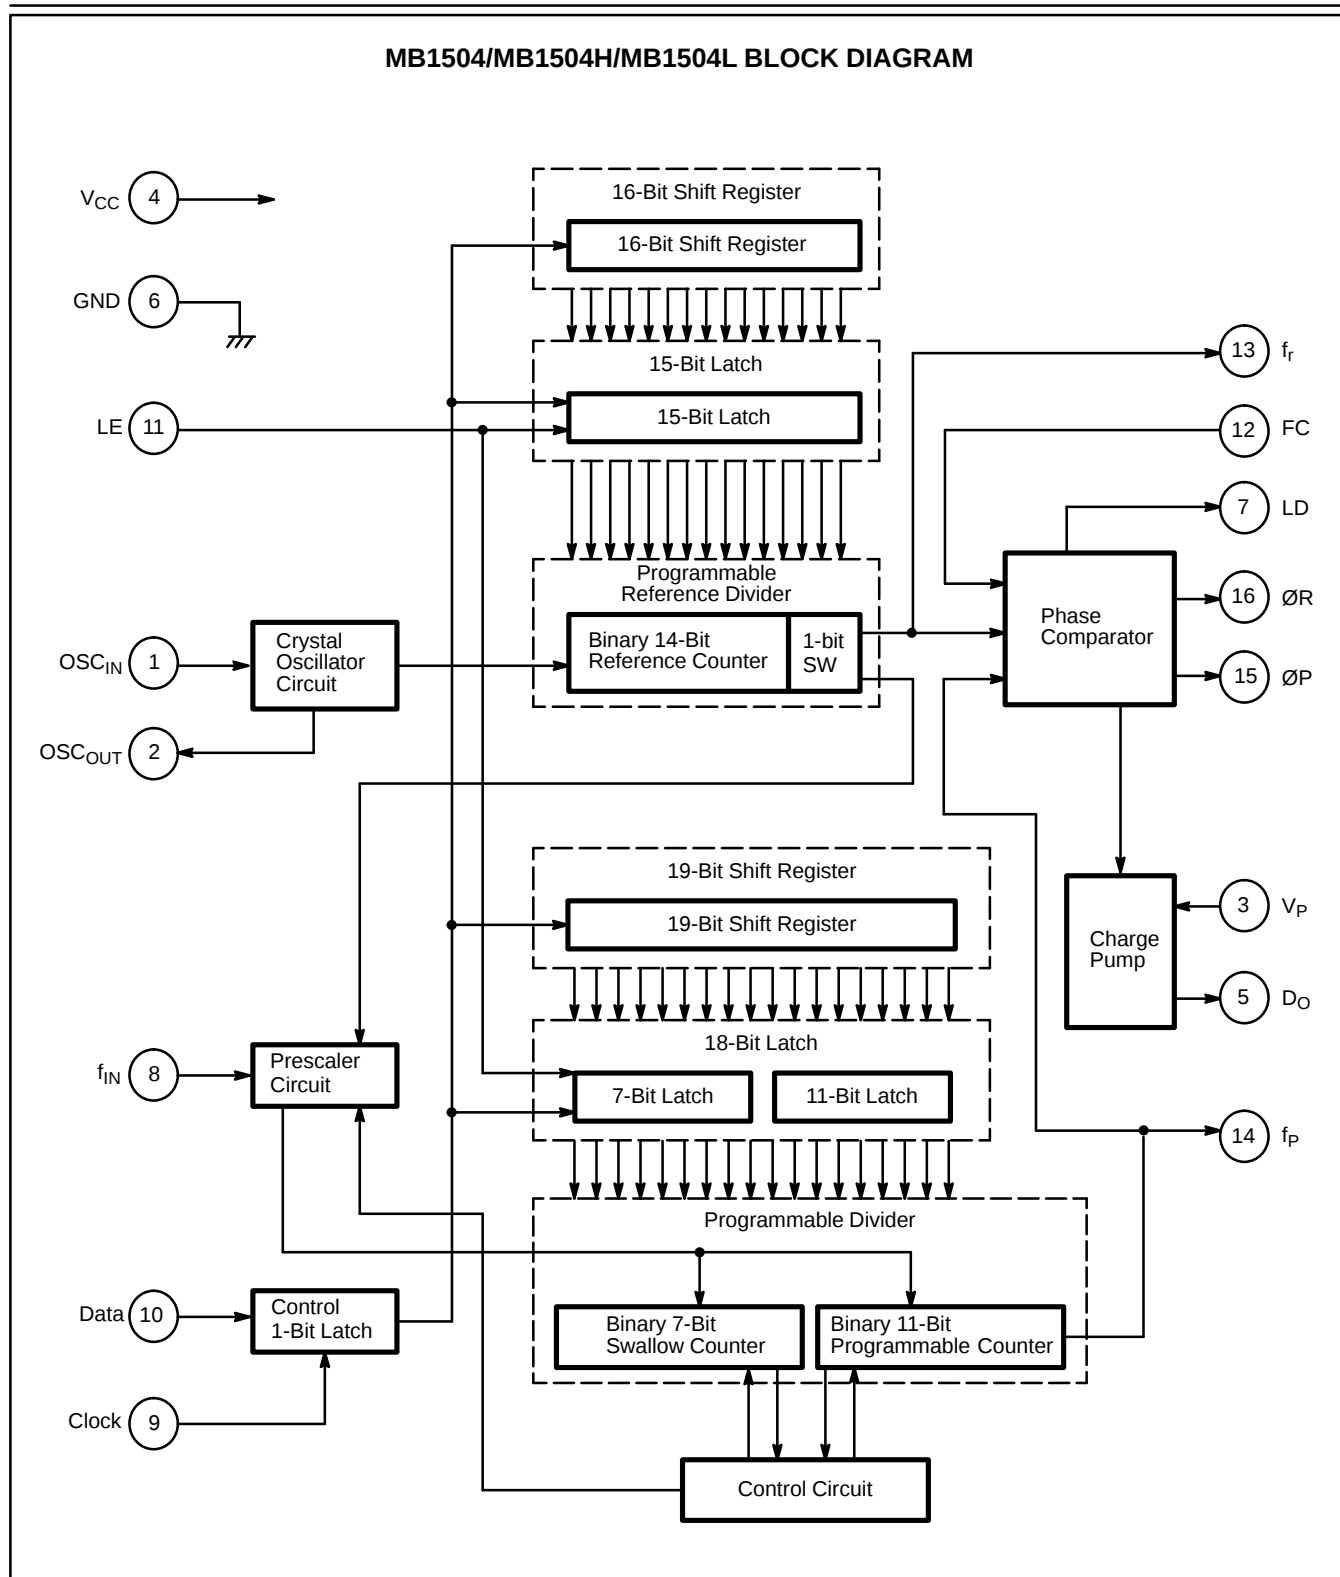

## PIN DESCRIPTIONS

| Pin No.  | Pin Name                                | I/O    | Descriptions                                                                                                                                                                                                                                                                                                                            |
|----------|-----------------------------------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1<br>2   | OSC <sub>IN</sub><br>OSC <sub>OUT</sub> | I<br>O | Oscillator input<br>Oscillator output<br>A crystal is placed between OSC <sub>IN</sub> and OSC <sub>OUT</sub> .                                                                                                                                                                                                                         |
| 3        | V <sub>P</sub>                          | —      | Power supply input for charge pump                                                                                                                                                                                                                                                                                                      |
| 4        | V <sub>CC</sub>                         | —      | Power supply voltage input                                                                                                                                                                                                                                                                                                              |
| 5        | D <sub>O</sub>                          | O      | Charge pump output<br>The phase characteristics can be inversed depending upon the FC input.                                                                                                                                                                                                                                            |
| 6        | GND                                     | —      | Ground                                                                                                                                                                                                                                                                                                                                  |
| 7        | LD                                      | O      | Phase comparator output<br>This pin outputs high when the phase is locked. While the phase difference of f <sub>r</sub> and f <sub>p</sub> exists, the output level goes low.                                                                                                                                                           |
| 8        | f <sub>IN</sub>                         | I      | Prescaler input<br>The connection with an external VCO should be an AC connection.                                                                                                                                                                                                                                                      |
| 9        | Clock                                   | I      | Clock input for 19-bit shift register and 16-bit shift register<br>Each rising edge of the clock shifts one bit of data into the shift registers.                                                                                                                                                                                       |
| 10       | Data                                    | I      | Serial data of binary code input<br>The last bit of the data is a control bit. The last data bit specifies which latch is activated.<br>When the last bit is high level and LE is high-level, data is transferred to the 15-bit latch.<br>When the last bit is low level and LE is high level, data is transferred to the 18-bit latch. |
| 11       | LE                                      | I      | Load enable input (with internal pull up resistor)<br>When LE is high level (or open), data stored in the shift register is transferred to the latch depending on the control data.                                                                                                                                                     |
| 12       | FC                                      | O      | Phase selecting input of phase comparator (with internal pull up resistor)<br>When FC is low level, the charge pump and phase detector characteristics can be inversed.                                                                                                                                                                 |
| 13       | f <sub>r</sub>                          | O      | Monitor pin of phase comparator input<br>It is the same as the programmable reference divider output.                                                                                                                                                                                                                                   |
| 14       | f <sub>p</sub>                          | O      | Monitor pin of phase comparator input<br>It is the same as the programmable divider output.                                                                                                                                                                                                                                             |
| 15<br>16 | ØP<br>ØR                                | O<br>O | Outputs for external charge pump<br>The phase characteristics can be inversed depending on the FC input.<br>The ØP pin is an N-channel open-drain output.                                                                                                                                                                               |

# FUNCTIONAL DESCRIPTIONS

## SERIAL DATA INPUT

Serial data input is input using the Data pin, Clock pin and LE pin. The 15-bit programmable reference divider and 18-bit programmable divider are controlled, respectively.

On rising edge of the clock, one bit of the data shifts into the internal shift registers.


When load enable (LE) is high level (or open), data stored in the shift registers is transferred to the 15-bit latch or 18-bit latch depending upon the control bit level.

Control data “H” : Data is transferred into the 15-bit latch.

Control data “L” : Data is transferred into the 18-bit latch.

## PROGRAMMABLE REFERENCE DIVIDER

The programmable reference divider consists of a 16-bit shift register, 15-bit latch and 14-bit reference counter. Serial 16-bit data format is shown below.

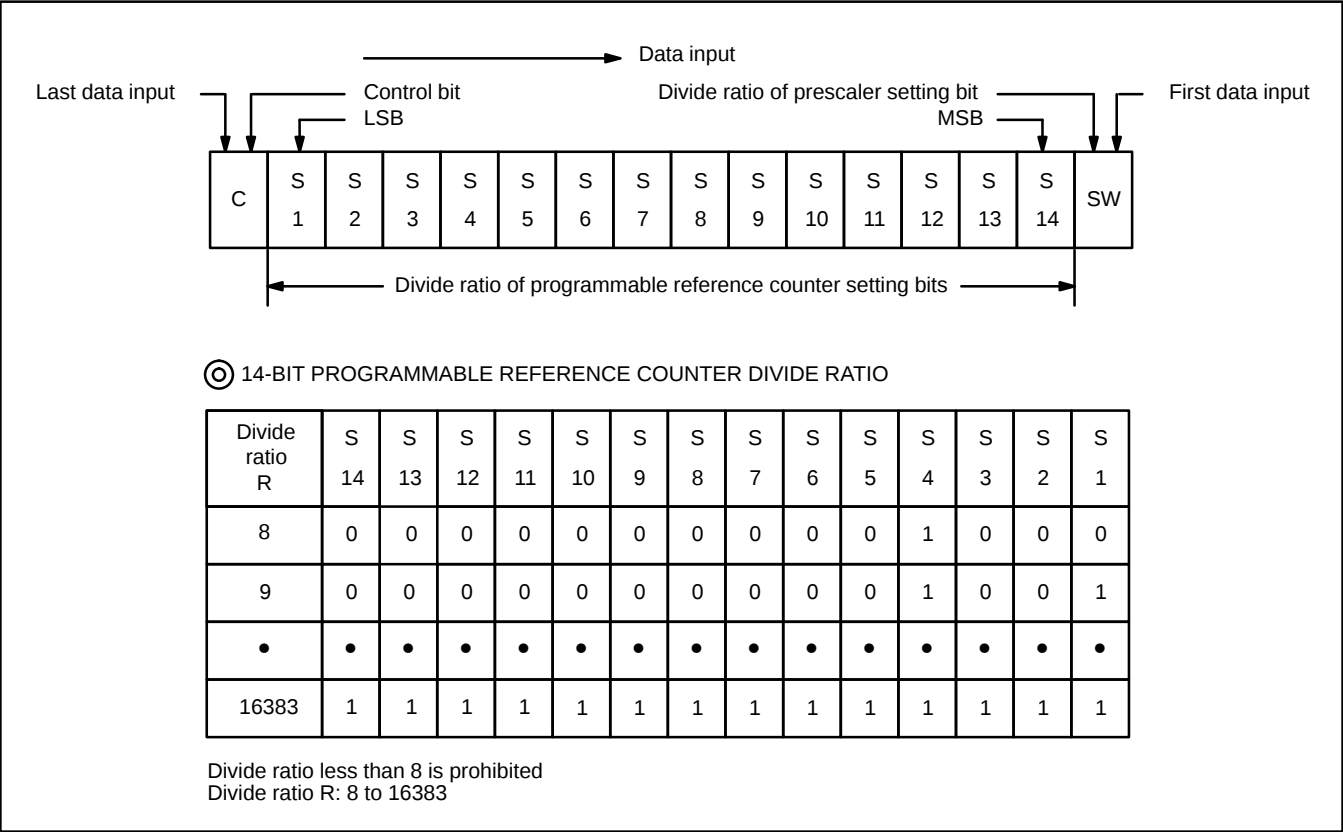

SW: Divide ratio of prescaler setting bit

SW=“H”: 32

SW=“L”: 64


S<sub>1</sub> to S<sub>14</sub>: Divide ratio of programmable reference counter setting bits (8 to 16383)

C: Control bit (control bit is set to high)

# FUNCTIONAL DESCRIPTIONS


## PROGRAMMABLE DIVIDER

The programmable divider consists of a 19-bit shift register, 18-bit latch, 7-bit swallow counter and 11-bit programmable counter. Serial 19-bit data format is shown below.

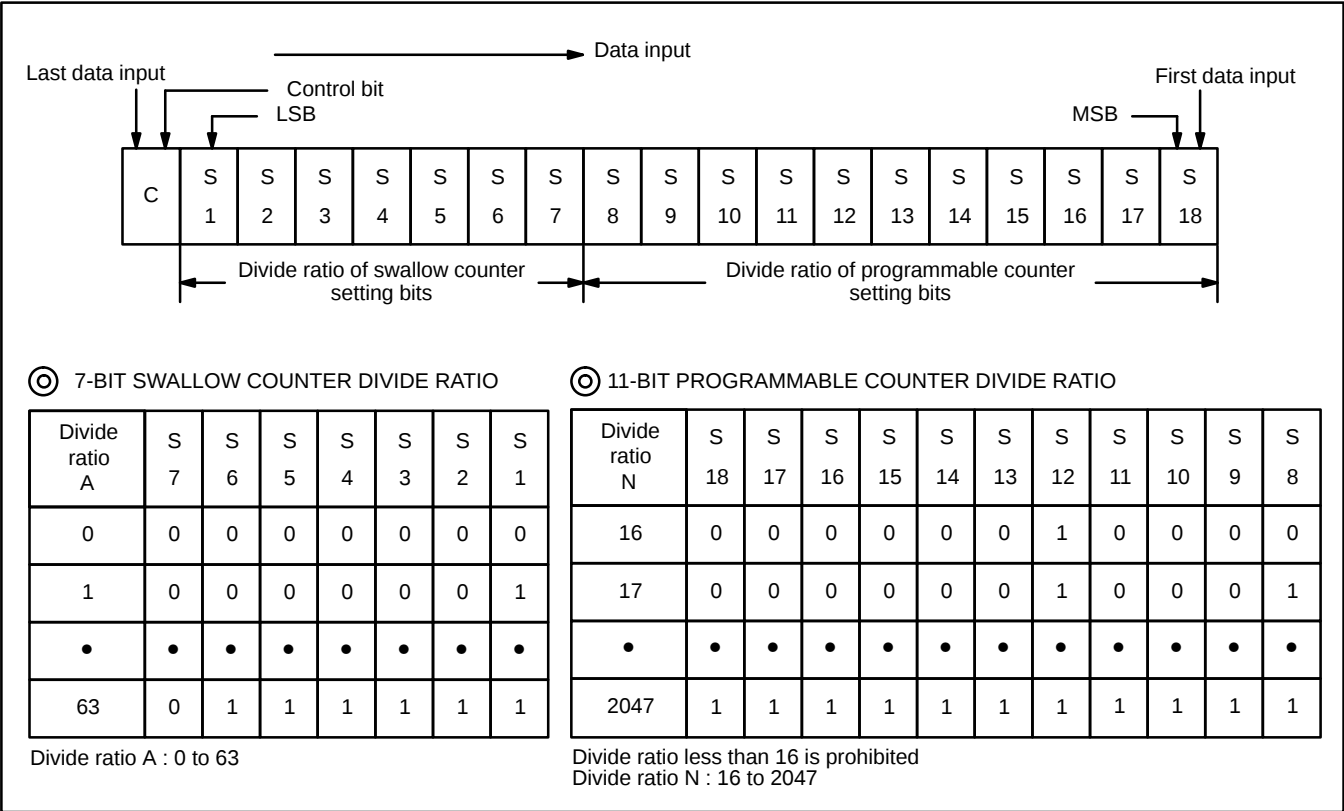

S<sub>8</sub> to S<sub>18</sub> : Divide ratio of programmable counter setting bits (16 to 2047)  
S<sub>1</sub>to S<sub>7</sub> : Divide ratio of swallow counter setting bits (0 to 127)  
C: Control bit (control bit is set to low)  
Data is input from the MSB.

SERIAL DATA INPUT TIMING

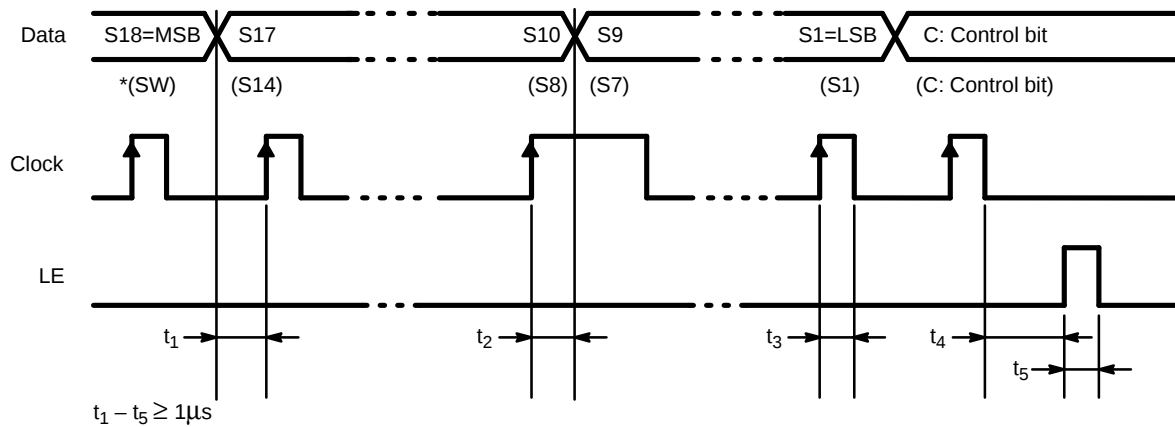

PHASE CHARACTERISTICS


The FC pin (pin 12) is provided to inverse the phase comparator characteristics. The characteristics of the internal charge pump output (D<sub>O</sub>), and phase detector outputs (ØR, ØP) can be inversed depending upon the FC input data. Outputs are shown below.

|                                | FC=H (or open) |    |    | FC=L           |    |    |
|--------------------------------|----------------|----|----|----------------|----|----|
|                                | D <sub>O</sub> | ØR | ØP | D <sub>O</sub> | ØR | ØP |
| f <sub>r</sub> >f <sub>p</sub> | H              | L  | L  | L              | H  | Z  |
| f <sub>r</sub> <f <sub>p</sub> | L              | H  | Z  | H              | L  | L  |
| f <sub>r</sub> =f <sub>p</sub> | Z              | L  | Z  | Z              | L  | Z  |

**Note:** Z=(High impedance)

Depending upon VCO characteristics, FC pin should be set accordingly:  
When VCO characteristics are like ①, FC should be set high or open circuit;  
When VCO characteristics are like ②, FC should be set Low.

VCO CHARACTERISTICS

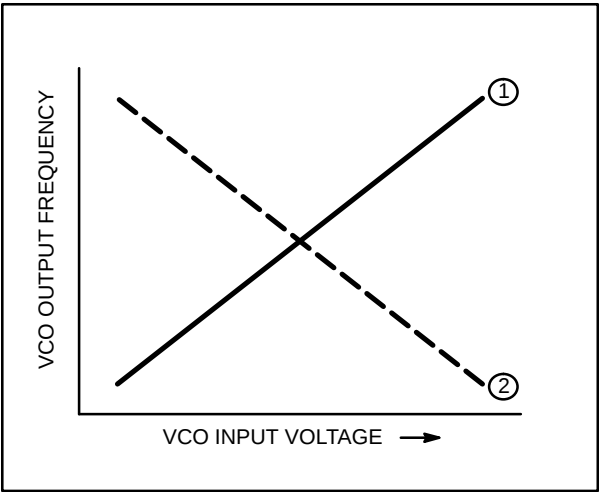

**MB1504**  
**MB1504H**  
**MB1504L**

## RECOMMENDED OPERATING CONDITIONS

| Parameter             | Symbol              |                   | Value    |     |          | Unit |
|-----------------------|---------------------|-------------------|----------|-----|----------|------|
|                       |                     |                   | Min      | Typ | Max      |      |
| Power Supply Voltage  | $V_{CC}$            | —                 | 2.7      | 3.0 | 5.5      | V    |
|                       | $V_{PH}$            | MB1504H           | $V_{CC}$ | —   | 10.0     | V    |
|                       | $V_P, V_{PL}$       | MB1504<br>MB1504L | $V_{CC}$ | —   | 8.5      |      |
| Open-drain Output     | $V_{OOPH}$          | MB1504H           | $V_{CC}$ | —   | 10.0     | V    |
|                       | $V_{OOP}, V_{OOPL}$ | MB1504<br>MB1504L | $V_{CC}$ | —   | 8.5      |      |
| Input Voltage         | $V_{IN}$            | —                 | GND      | —   | $V_{CC}$ | V    |
| Operating Temperature | $T_A$               | —                 | −40      | —   | +85      | °C   |

## HANDLING PRECAUTIONS

- This device should be transported and stored in anti-static containers.
- This is a static-sensitive device; take proper anti-ESD precautions. Ensure that personnel and equipment are properly grounded. Cover workbenches with grounded conductive mats.
- Always turn the power supply off before inserting or removing the device from its socket.
- Protect leads with a conductive sheet when handling or transporting PC boards with devices.

# ELECTRICAL CHARACTERISTICS

( $V_{CC}=2.7$  to  $5.5V$ ,  $T_A=-40$  to  $+85^{\circ}C$ )


| Parameter                           | Pin Name                                     | Symbol            | Condition                                                         | Value                                                             |                     |      | Unit             |    |
|-------------------------------------|----------------------------------------------|-------------------|-------------------------------------------------------------------|-------------------------------------------------------------------|---------------------|------|------------------|----|
|                                     |                                              |                   |                                                                   | Min                                                               | Typ                 | Max  |                  |    |
| Power Supply Current                | V <sub>CC</sub>                              | I <sub>CC</sub>   | *1                                                                | —                                                                 | 10                  | 16   | mA               |    |
| Operating Frequency                 | f <sub>IN</sub>                              | f <sub>IN</sub>   | *2                                                                | 10                                                                | —                   | 520  | MHz              |    |
|                                     | OSC <sub>IN</sub>                            | f <sub>OSC</sub>  |                                                                   | —                                                                 | 12                  | 20   | MHz              |    |
| Input Sensitivity                   | f <sub>IN</sub>                              | Pf <sub>IN1</sub> | V <sub>CC</sub> =2.7 to 4.0V                                      | −10                                                               | —                   | 6    | dBm              |    |
|                                     |                                              | Pf <sub>IN2</sub> | V <sub>CC</sub> =4.0 to 5.5V                                      | −4                                                                | —                   | 6    | dBm              |    |
|                                     | OSC <sub>IN</sub>                            | V <sub>IN</sub>   | —                                                                 | 0.5                                                               | —                   | —    | V <sub>P-P</sub> |    |
| High-level Input Voltage            | Except f <sub>IN</sub> and OSC <sub>IN</sub> | V <sub>IH</sub>   | —                                                                 | 0.7xV <sub>CC</sub>                                               | —                   | —    | V                |    |
| Low-level Input Voltage             |                                              | V <sub>IL</sub>   | —                                                                 | —                                                                 | 0.3xV <sub>CC</sub> | V    |                  |    |
| High-level Input Current            | Data, Clock                                  | I <sub>IH</sub>   | —                                                                 | —                                                                 | 1.0                 | —    | μA               |    |
| Low-level Input Current             |                                              | I <sub>IL</sub>   | —                                                                 | —                                                                 | −1.0                | —    | μA               |    |
| Input Current                       | OSC <sub>IN</sub>                            | I <sub>IN</sub>   | —                                                                 | —                                                                 | ±50                 | —    | μA               |    |
|                                     | LE, FC                                       | I <sub>LE</sub>   | —                                                                 | —                                                                 | −60                 | —    | μA               |    |
| High-level Output Voltage           | Except D <sub>O</sub> and OSC <sub>OUT</sub> | V <sub>OH</sub>   | V <sub>CC</sub> =3.0V                                             | 2.4                                                               | —                   | —    | V                |    |
| Low-level Output Voltage            |                                              | V <sub>OL</sub>   |                                                                   | —                                                                 | —                   | 0.4  | V                |    |
| N-channel Open-drain Cutoff Current | ØP                                           | I <sub>OFF</sub>  | V <sub>CC</sub> ≤ V <sub>P</sub> ≤ 8V                             | —                                                                 | —                   | 1.1  | μA               |    |
| High-level Output Current           | Except D <sub>O</sub> and OSC <sub>OUT</sub> | I <sub>OH</sub>   | —                                                                 | −1.0                                                              | —                   | —    | mA               |    |
| Low-level Output Current            |                                              | I <sub>OL</sub>   | —                                                                 | 1.0                                                               | —                   | —    | mA               |    |
| High-level Output Current           | D <sub>O</sub>                               | I <sub>DOHH</sub> | MB1504H                                                           | V <sub>CC</sub> =3V<br>V <sub>P</sub> =12V, T <sub>A</sub> =+25°C | −2.2                | −4.5 | —                | mA |
|                                     |                                              | I <sub>DOH</sub>  | MB1504                                                            | V <sub>CC</sub> =3V<br>V <sub>P</sub> =6V, T <sub>A</sub> =+25°C  | −0.5                | −2.0 | —                | mA |
|                                     |                                              | I <sub>DOHL</sub> | MB1504L                                                           |                                                                   | −0.5                | −1.1 | −2.2             | mA |
| Low-level Output Current            |                                              | I <sub>DOLH</sub> | MB1504H                                                           | V <sub>CC</sub> =3V<br>V <sub>P</sub> =12V, T <sub>A</sub> =+25°C | 2.2                 | 6.0  | —                | mA |
|                                     |                                              | I <sub>DOL</sub>  | MB1504                                                            | V <sub>CC</sub> =3V<br>V <sub>P</sub> =6V, T <sub>A</sub> =+25°C  | 1.5                 | 6.0  | —                | mA |
|                                     |                                              | I <sub>DOLL</sub> | MB1504L                                                           |                                                                   | 4.5                 | 12.0 | —                | mA |
| Leakage Current                     | D <sub>O</sub> , ØP                          | I <sub>DOZ</sub>  | V <sub>CC</sub> =3V<br>V <sub>P</sub> =12V, T <sub>A</sub> =+25°C | —                                                                 |                     | 1.0  | μA               |    |

**Note:** \*1  $V_{CC}=3.0V$ ,  $f_{IN}=520MHz$ ,  $f_{OSC}=12MHz$  crystal.  
Inputs are grounded except  $f_{IN}$ , and outputs are open.  
\*2 Input coupling capacitor 1000pF is connected.


MB1504  
MB1504H  
MB1504L

## TYPICAL CHARACTERISTICS CURVES


### CHARGE PUMP CHARACTERISTICS

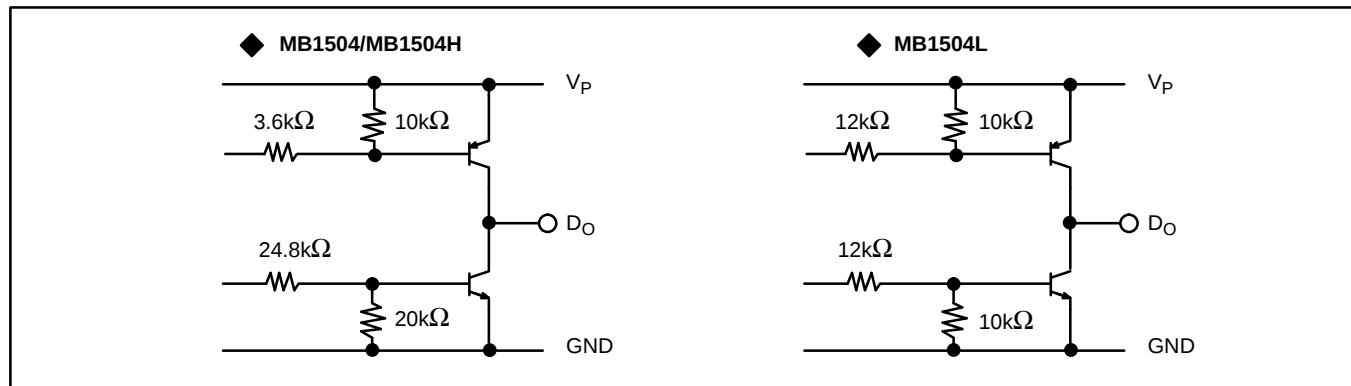

### LOCK UP TIME MEASUREMENT

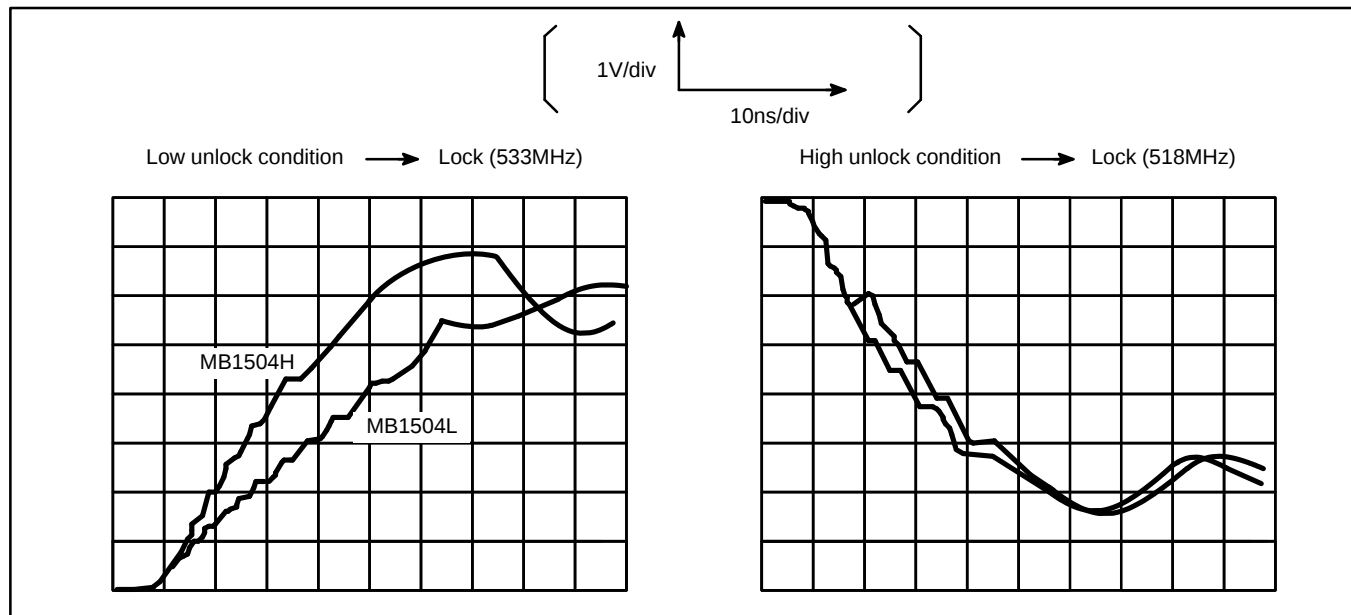


### DO PIN OUTPUT CURRENT CURVES (TYPICAL)

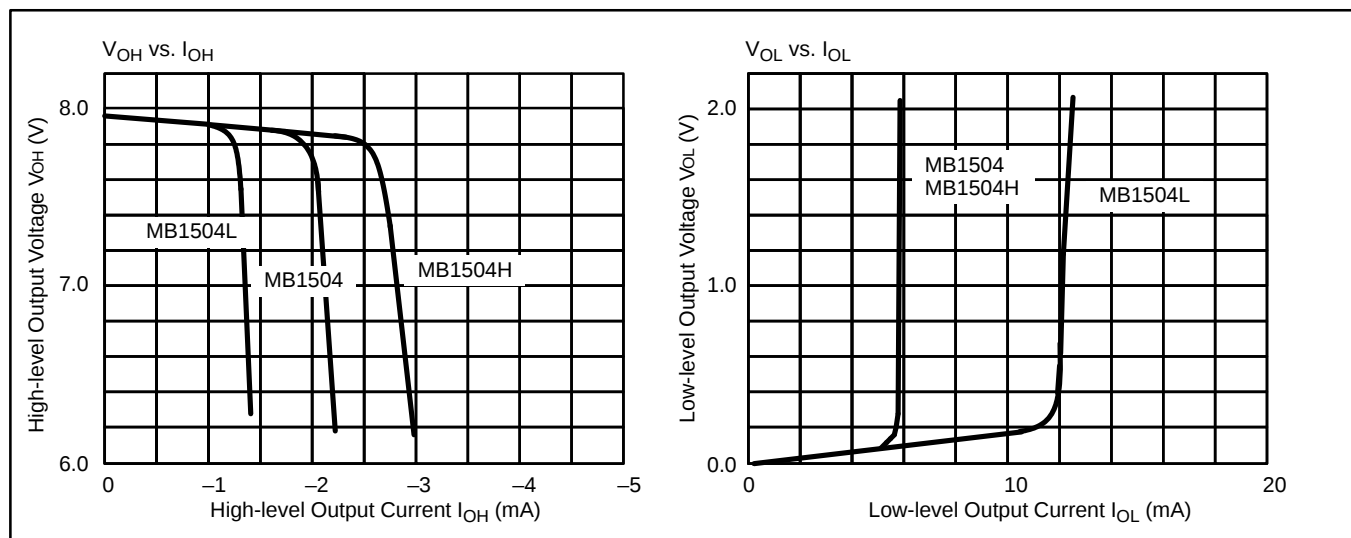


D<sub>O</sub> PIN OUTPUT WAVEFORM AT LOCK CONDITION


Output Waveform




MB1504

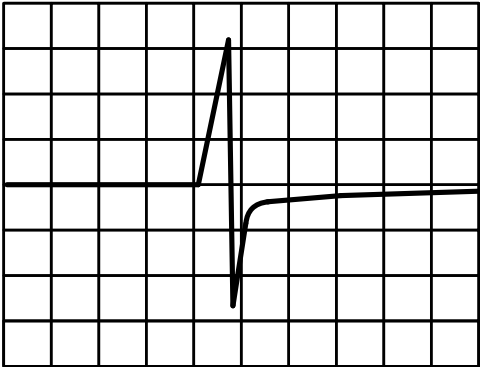

MB1504H


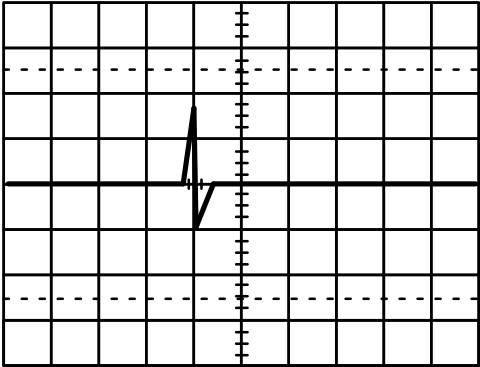


MB1504L

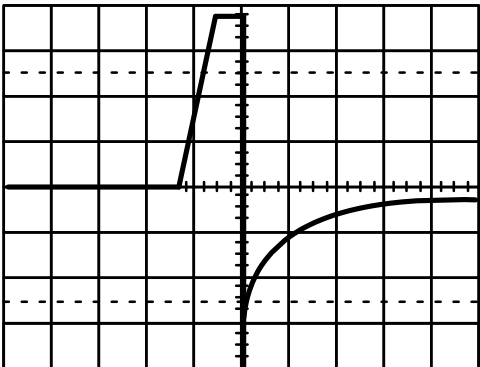



MB1504  
MB1504H  
MB1504L

PHASE CHARACTERISTICS ( $\Delta f$  vs.  $D_O$  OUTPUT ENERGY)

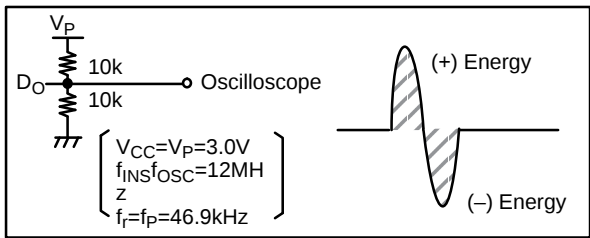
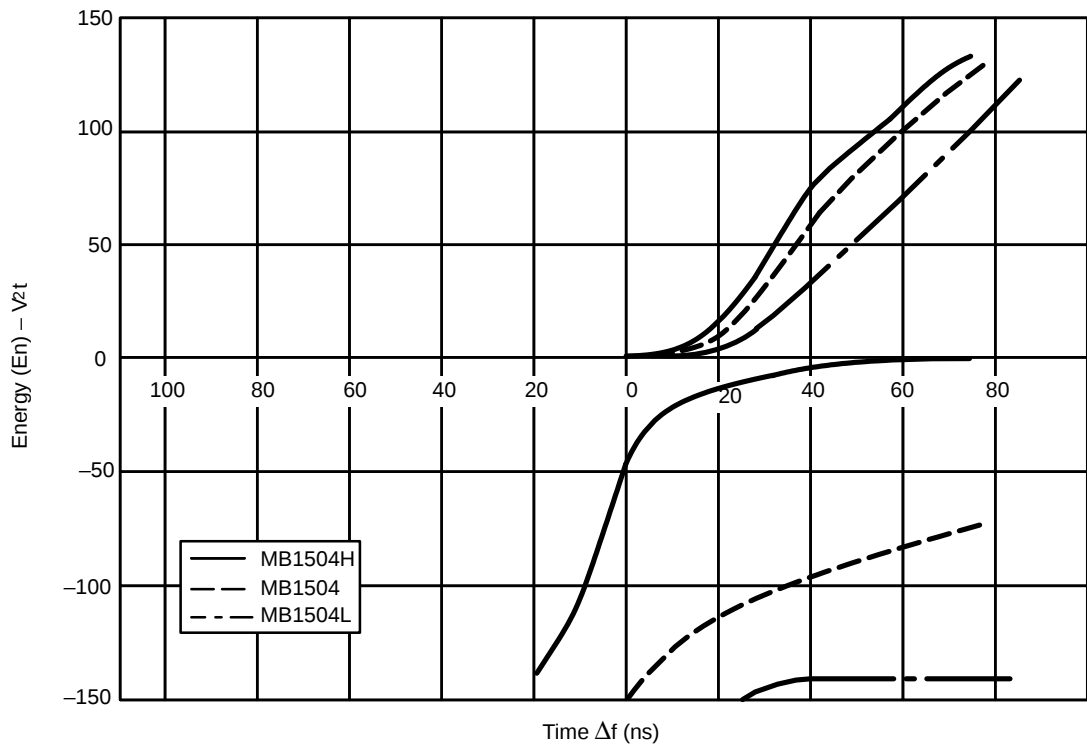


INPUT SENSITIVITY

Input Sensitivity vs. Input Frequency (Supply Voltage Dependence)

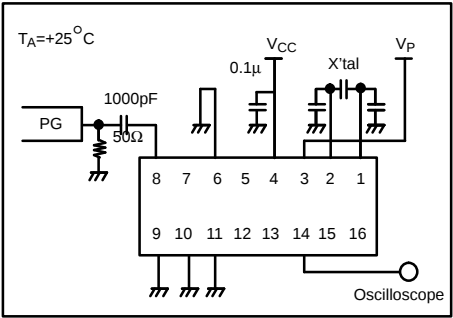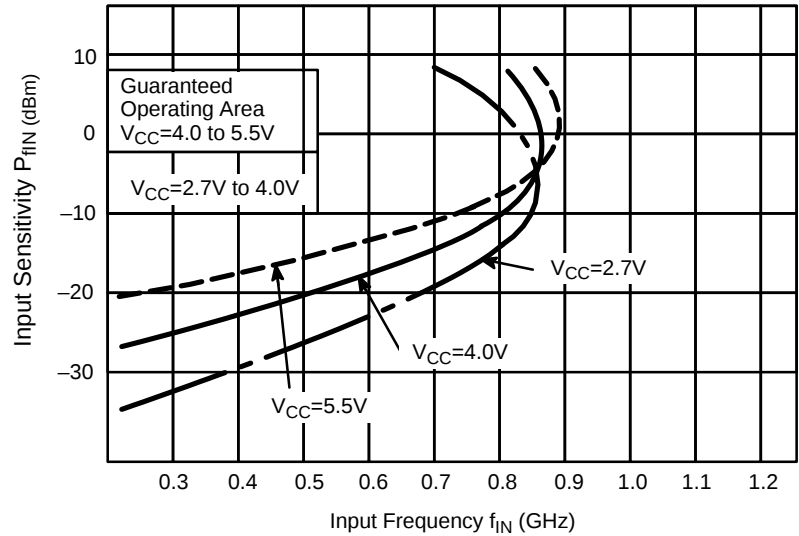


Input Sensitivity vs. Input Frequency (Temperature Dependence)

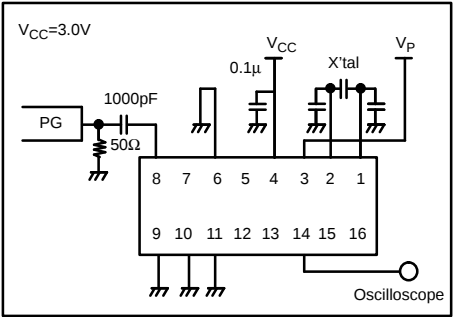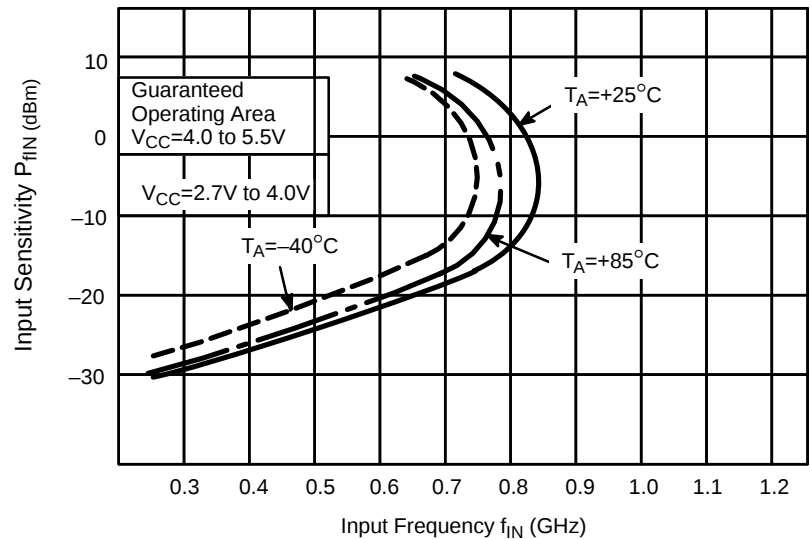


**MB1504**  
**MB1504H**  
**MB1504L**

## INPUT IMPEDANCE

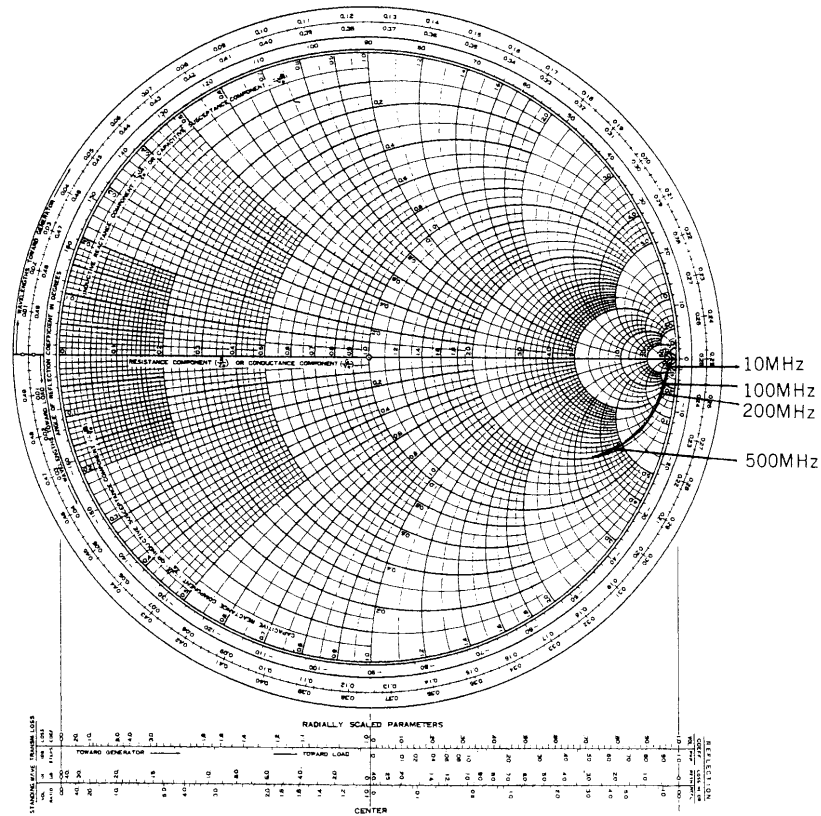


## TEST CIRCUIT


### D<sub>O</sub> Pin Output Current (I<sub>OH</sub>, I<sub>OL</sub>) Measurement

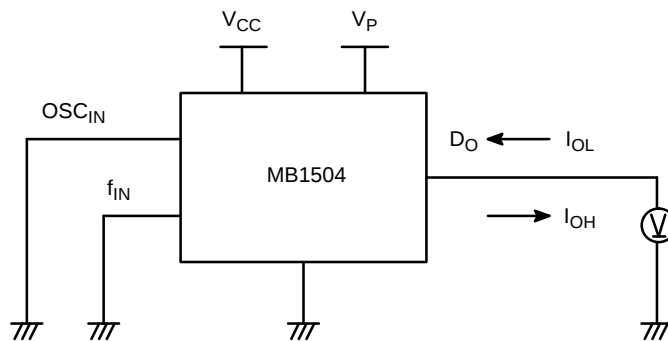


Lock up Time Measurement

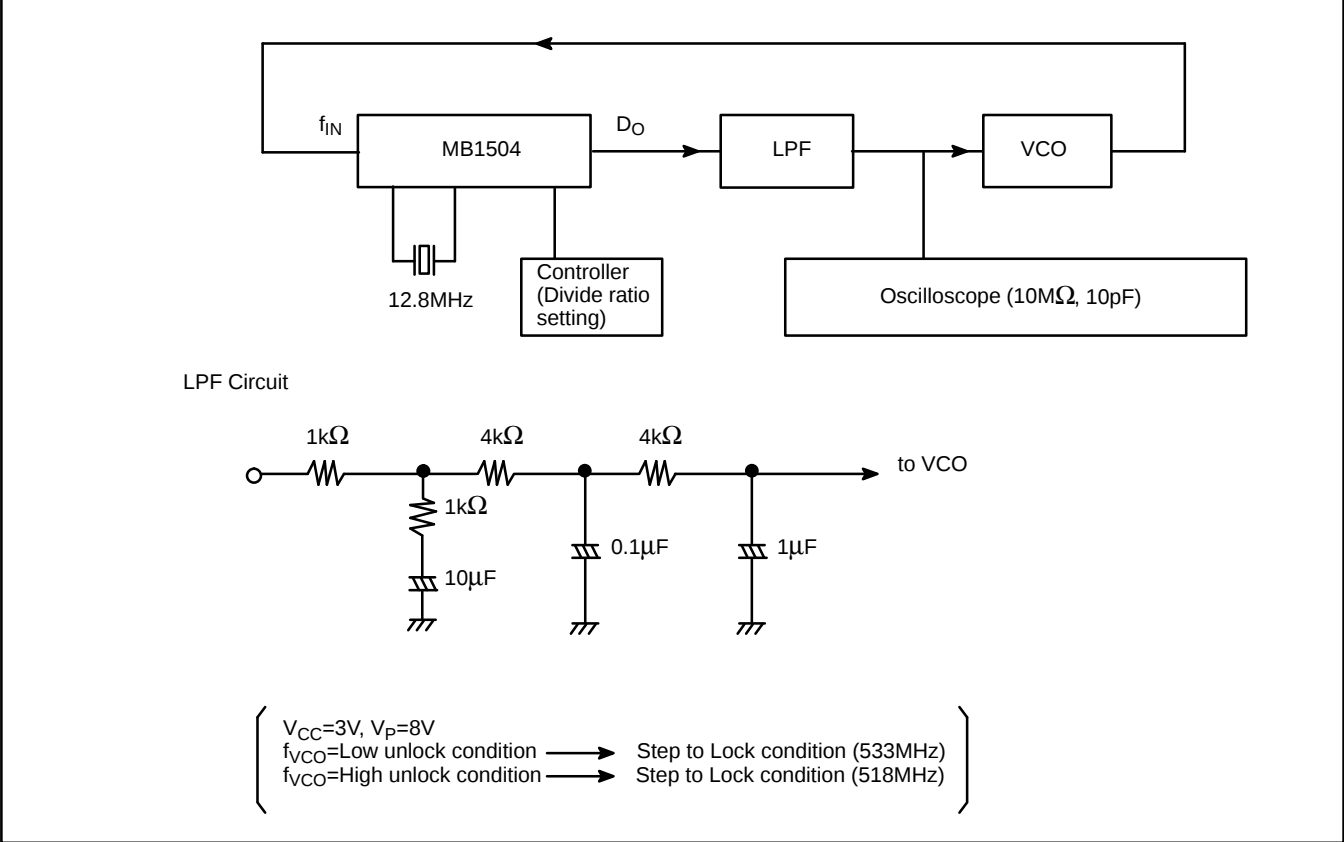


Phase Characteristics Measurement

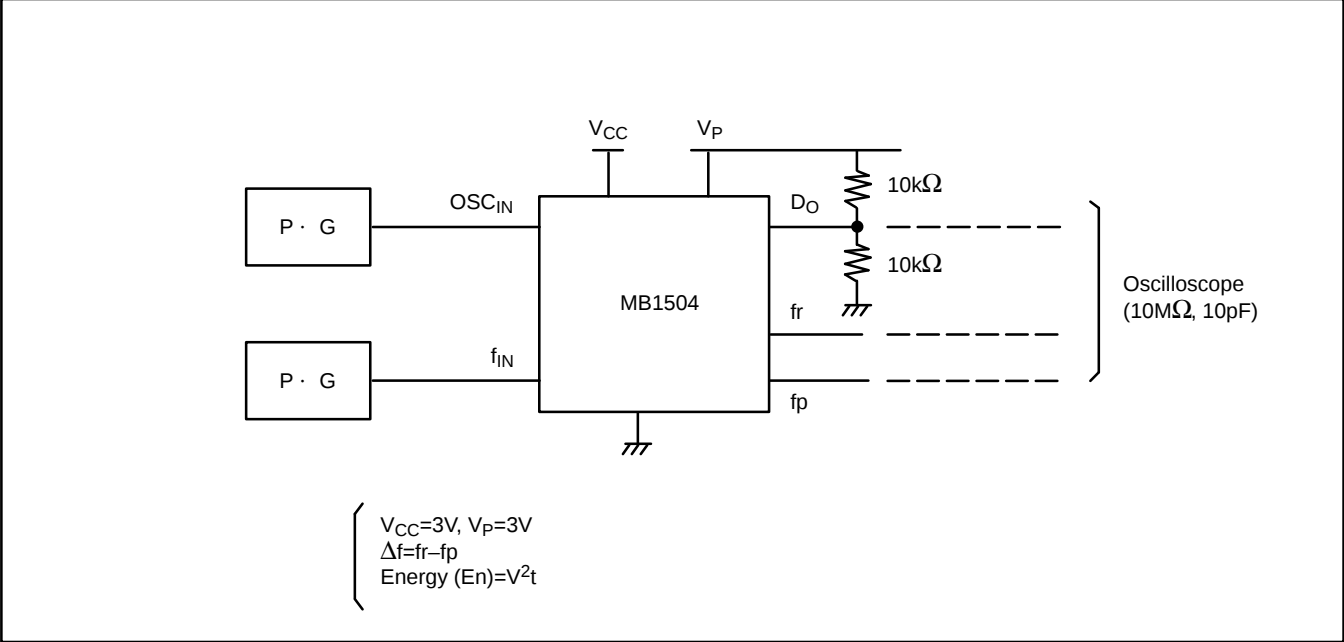

## TYPICAL APPLICATION EXAMPLE

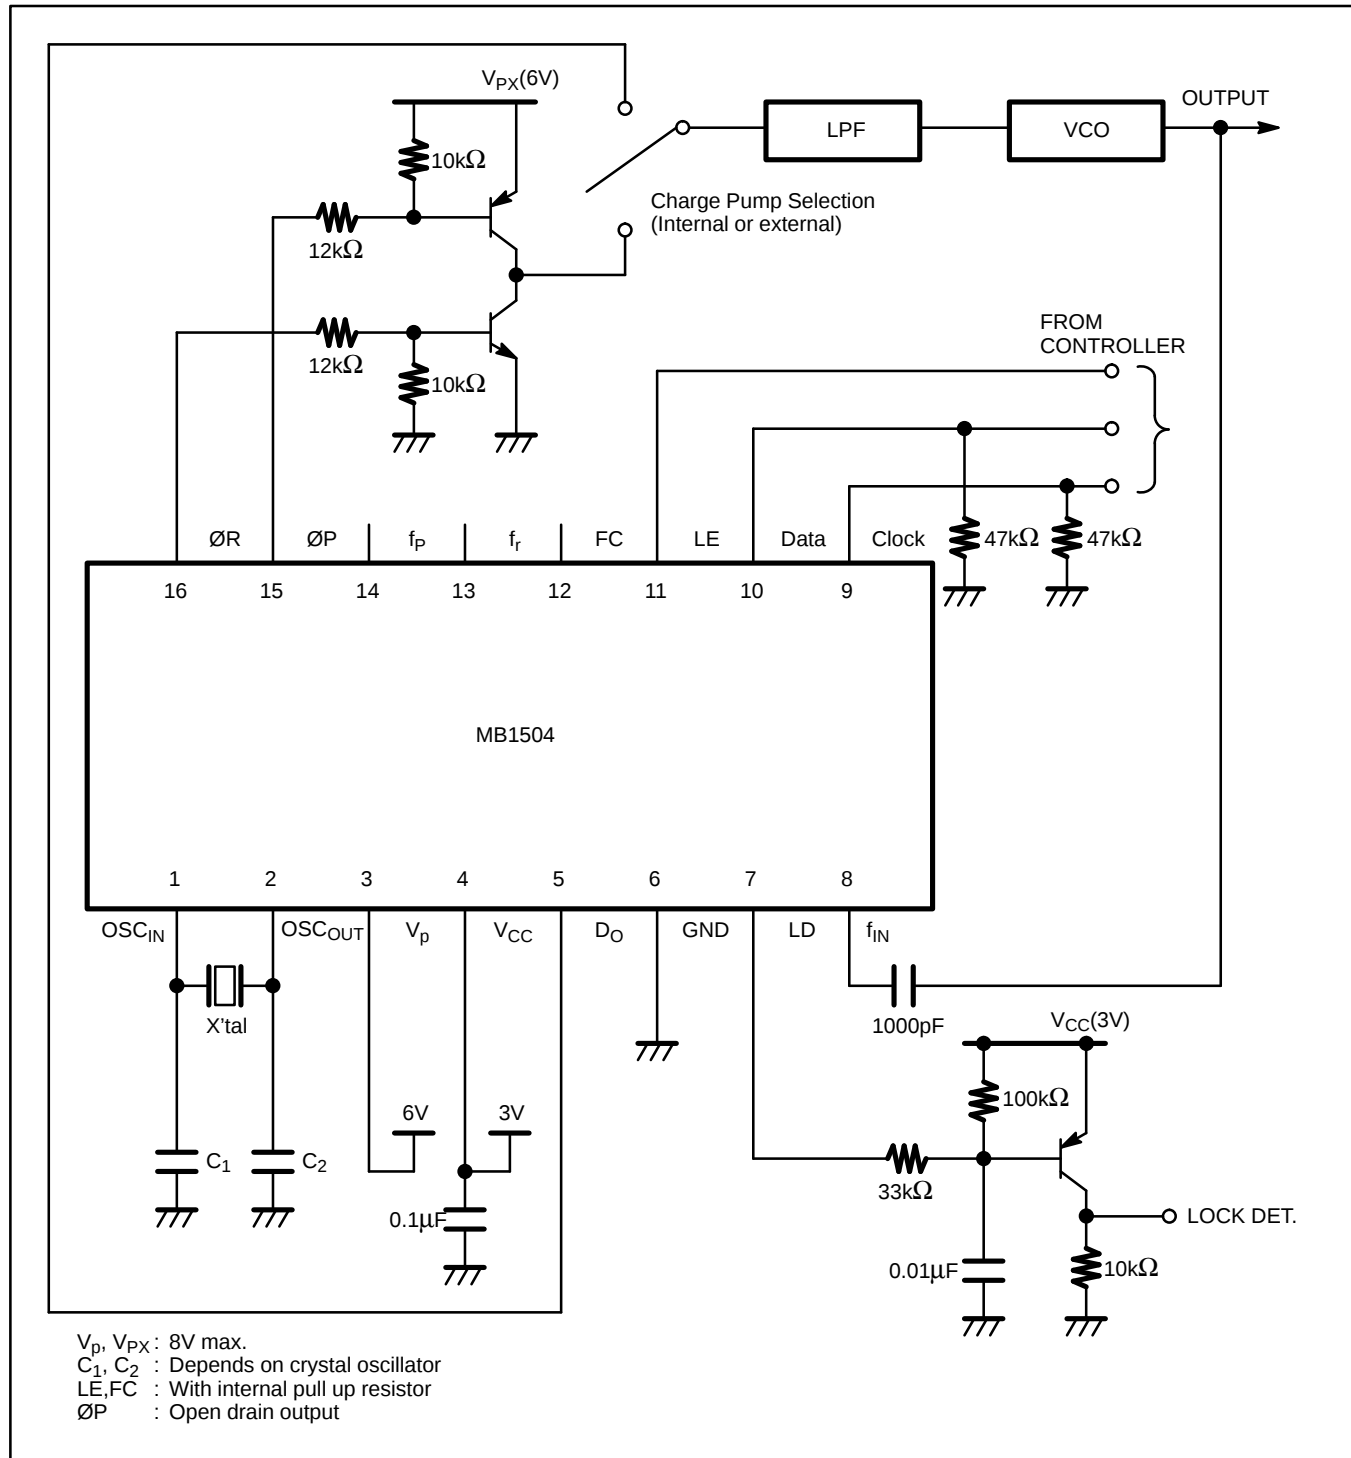


PACKAGE DIMENSIONS

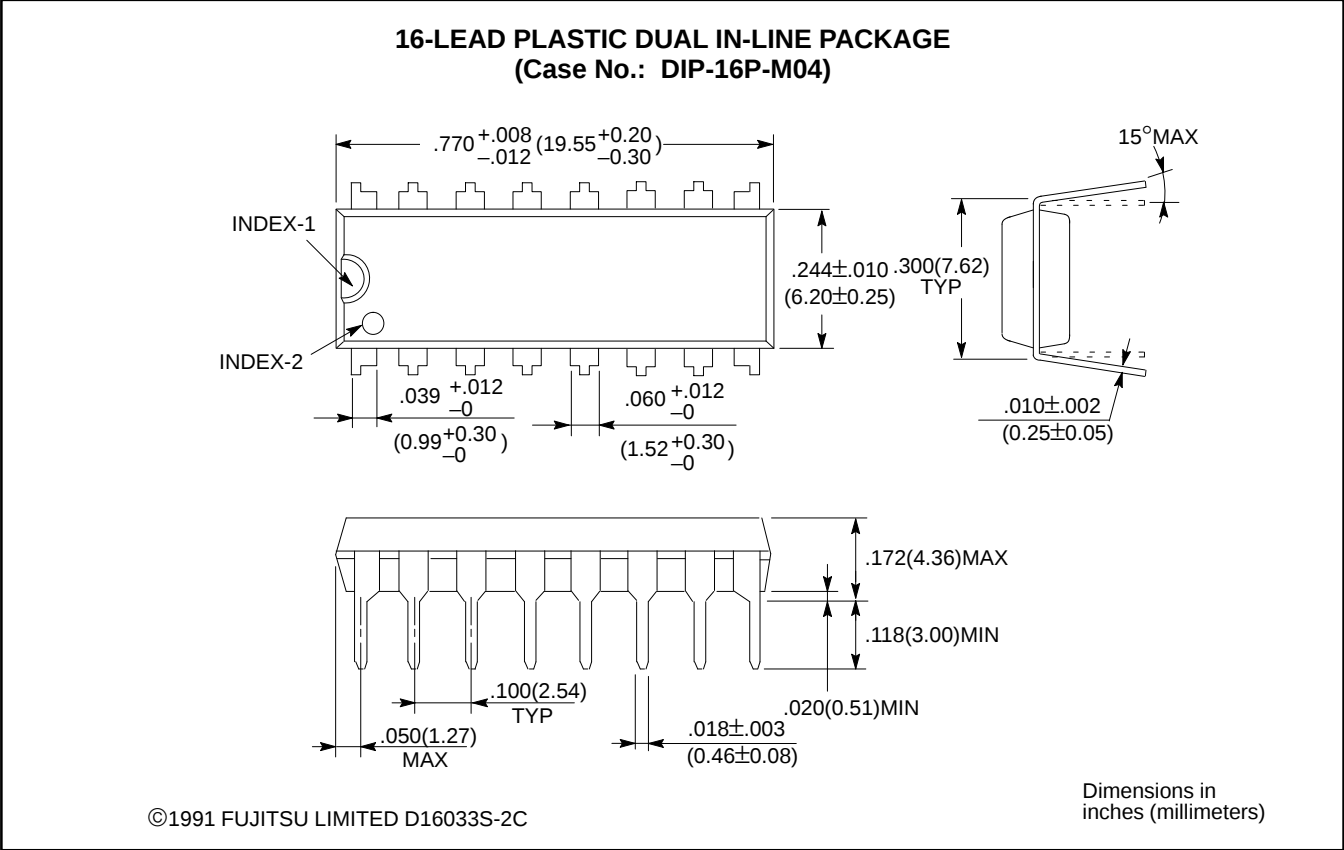

MB1504  
MB1504H  
MB1504L

## PACKAGE DIMENSIONS

### 16-LEAD PLASTIC FLAT PACKAGE (Case No.: FPT-16P-M06)

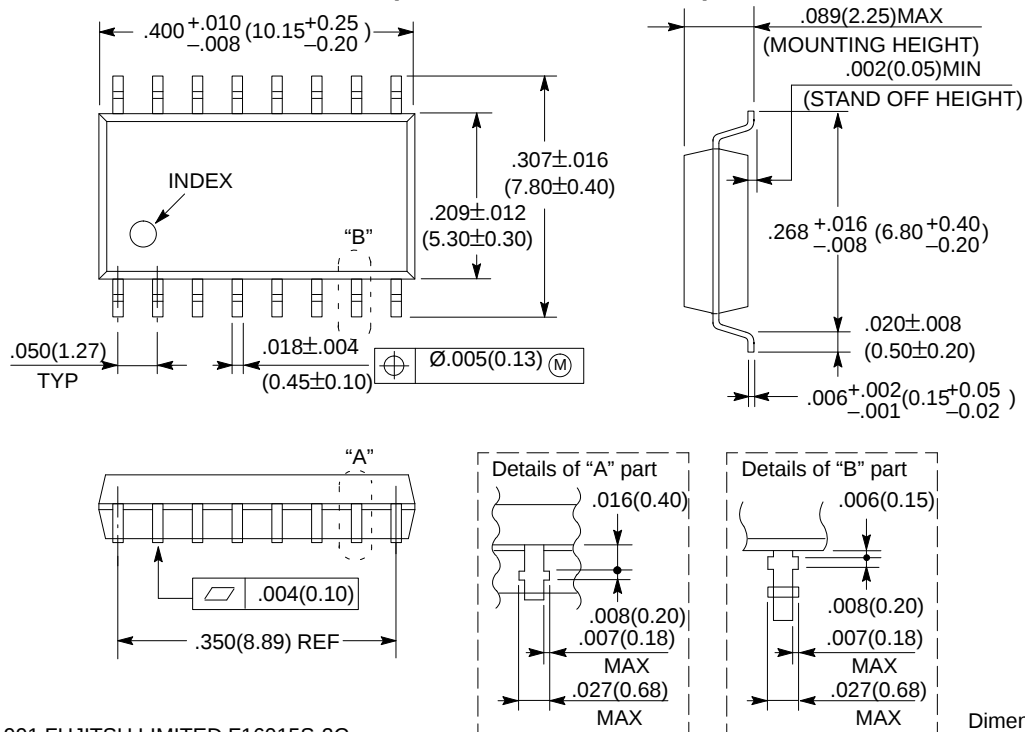

©1991 FUJITSU LIMITED F16015S-2C

Dimensions in  
inches (millimeters)

For further information please contact:

**Japan**

FUJITSU LIMITED  
Electronic Devices  
International Operations Department  
KAWASAKI PLANT, 1015 Kamikodanaka,  
Nakahara-ku, Kawasaki-shi,  
Kanagawa 211, Japan  
Tel: (044) 754-3753  
FAX: (044) 754-3332

**North and South America**

FUJITSU MICROELECTRONICS, INC.  
Semiconductor Division  
3545 North First Street  
San Jose, CA 95134-1804, USA  
Tel: (408) 922-9000  
FAX: (408) 432-9044/9045

**Europe**

FUJITSU MIKROELEKTRONIK GmbH  
Am Siebenstein 6-10,  
63303 Dreieich-Buchschlag,  
Germany  
Tel: (06103) 690-0  
FAX: (06103) 690-122

**Asia Pacific**

FUJITSU MICROELECTRONICS ASIA PTE LIMITED  
No.51 Bras Basah Road,  
Plaza By The Park,  
#06-04 to #06-07  
Singapore 0718  
Tel: 336-1600  
FAX: 336-1609