

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TC74VCXR162245FT

LOW-VOLTAGE 16-BIT BUS TRANSCEIVER WITH 3.6 V TOLERANT INPUTS AND OUTPUTS


The TC74VCXR162245FT is a high performance CMOS 16-bit BUS TRANSCEIVER. Designed for use in 1.8, 2.5 or 3.3 Volt systems, it achieves high speed operation while maintaining the CMOS low power dissipation.

It is also designed with over voltage tolerant inputs and outputs up to 3.6 V.

This 16bit bus transceiver is controlled by direction control (DIR) inputs and output enable ($\overline{OE}$) inputs which are common to each byte. It can be used as two 8-bit transceivers or one 16-bit transceiver. The direction of data transmission is determined by the level of the DIR inputs. The $\overline{OE}$ inputs can be used to disable the device so that the busses are effectively isolated.

The 26- Ω series resistor helps reducing output overshoot and undershoot without external resistor.

All inputs are equipped with protection circuits against static discharge.

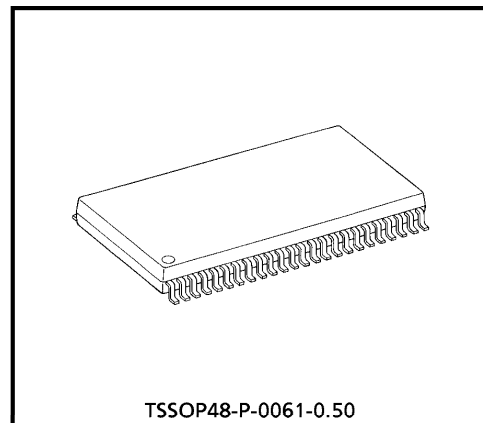

Weight : 0.25 g (Typ.)

FEATURES

- 26- Ω Series Resistors on all Outputs.
- Low Voltage Operation : $V_{CC} = 1.8 \sim 3.6$ V
- High Speed Operation : $t_{pd} = 3.4$ ns (max) at $V_{CC} = 3.0 \sim 3.6$ V
 : $t_{pd} = 4.3$ ns (max) at $V_{CC} = 2.3 \sim 2.7$ V
 : $t_{pd} = 5.7$ ns (max) at $V_{CC} = 1.8$ V
- 3.6V Tolerant inputs and outputs.
- Output Current : $I_{OH}/I_{OL} = \pm 12$ mA (min) at $V_{CC} = 3.0$ V
 : $I_{OH}/I_{OL} = \pm 8$ mA (min) at $V_{CC} = 2.3$ V
 : $I_{OH}/I_{OL} = \pm 4$ mA (min) at $V_{CC} = 1.8$ V
- Latch-up Performance : ± 300 mA
- ESD Performance : Human Body Model $> \pm 2000$ V
 : Machine Model $> \pm 200$ V
- Package : TSSOP (Thin Shrink Small Outline Package)
- Bidirectional interface between 2.5 V and 3.3 V signals.
- Power Down Protection is provided on all inputs and outputs
- Supports live insertion / withdrawal (Note 3)

(Note 1) : Do not apply a signal to any bus terminal when it is in the output mode. Damage may result.


(Note 2) : All floating (high impedance) bus terminal must have their input level fixed by means of pull up or pull down resistors.

(Note 3) : To ensure the high-impedance state during power up or power down, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sourcing capability of the driver.

980910EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

PIN CONNECTION

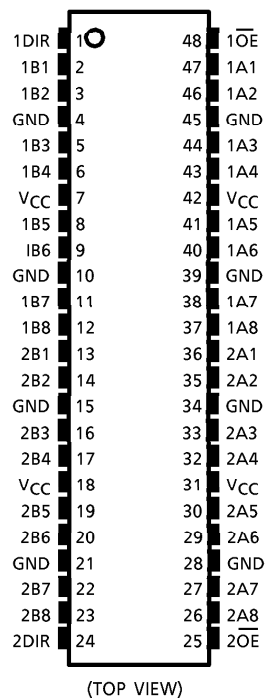

(TOP VIEW)


TRUTH TABLE

INPUT		FUNCTION		OUTPUT
1OE	1DIR	BUS 1A1-1A8	BUS 1B1-1B8	
L	L	OUTPUT	INPUT	A = B
L	H	INPUT	OUTPUT	B = A
H	X	High Impedance		Z


INPUT		FUNCTION		OUTPUT
2OE	2DIR	BUS 2A1-2A8	BUS 2B1-2B8	
L	L	OUTPUT	INPUT	A = B
L	H	INPUT	OUTPUT	B = A
H	X	High Impedance		Z

X : Don't Care
Z : High impedance

IEC LOGIC SYMBOL

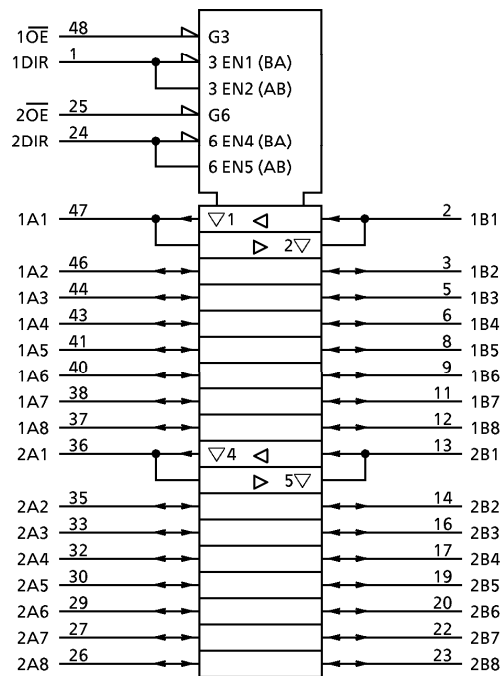

SYSTEM DIAGRAM

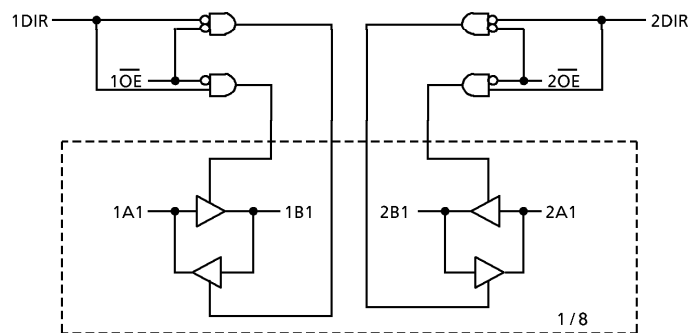

980910EBA2'

● The products described in this document are subject to the foreign exchange and foreign trade laws.
● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
● The information contained herein is subject to change without notice.

MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Power Supply Voltage	V_{CC}	$-0.5 \sim 4.6$	V
DC Input Voltage (DIR, $\overline{OE}$)	V_{IN}	$-0.5 \sim 4.6$	V
DC Bus I/O Voltage	$V_{I/O}$	$-0.5 \sim 4.6$ (Note 1)	V
		$-0.5 \sim V_{CC} + 0.5$ (Note 2)	
Input Diode Current	I_{IK}	-50	mA
Output Diode Current	I_{OK}	± 50 (Note 3)	mA
DC Output Current	I_{OUT}	± 50	mA
Power Dissipation	P_D	400	mW
DC V_{CC} /Ground Current Per Supply Pin	I_{CC}/I_{GND}	± 100	mA
Storage Temperature	T_{stg}	$-65 \sim 150$	$^{\circ}\text{C}$

(Note 1) : Off-State

(Note 2) : High or Low State. I_{OUT} absolute maximum rating must be observed.(Note 3) : $V_{OUT} < GND$, $V_{OUT} > V_{CC}$

RECOMMENDED OPERATING RANGE

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	1.8~3.6	V
		1.2~3.6 (Note 4)	
Input Voltage (DIR, $\overline{OE}$)	V_{IN}	$-0.3 \sim 3.6$	V
Bus I/O Voltage	$V_{I/O}$	0~3.6 (Note 5)	V
		0~ V_{CC} (Note 6)	
Output Current	I_{OH}/I_{OL}	± 12 (Note 7)	mA
		± 8 (Note 8)	
		± 4 (Note 9)	
Operating Temperature	T_{opr}	$-40 \sim 85$	$^{\circ}\text{C}$
Input Rise And Fall Time	dt/dv	0~10 (Note 10)	ns/V

(Note 4) : Data Retention Only

(Note 5) : Off-State

(Note 6) : High or Low State

(Note 7) : $V_{CC} = 3.0 \sim 3.6$ V(Note 8) : $V_{CC} = 2.3 \sim 2.7$ V(Note 9) : $V_{CC} = 1.8$ V(Note 10) : $V_{IN} = 0.8 \sim 2.0$ V, $V_{CC} = 3.0$ V

ELECTRICAL CHARACTERISTICS

DC characteristics ($T_a = -40\sim 85^\circ\text{C}$, $2.7\text{ V} < V_{CC} \leq 3.6\text{ V}$)

PARAMETER		SYMBOL	TEST CONDITION		V _{CC} (V)	MIN	MAX	UNIT
Input Voltage	"H" Level	V _{IH}			2.7~3.6	2.0	—	V
	"L" Level	V _{IL}			2.7~3.6	—	0.8	
Output Voltage	"H" Level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -100 μA	2.7~3.6	V _{CC} - 0.2	—	V
				I _{OH} = -6 mA	2.7	2.2	—	
				I _{OH} = -8 mA	3.0	2.4	—	
				I _{OH} = -12 mA	3.0	2.2	—	
	"L" Level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 100 μA	2.7~3.6	—	0.2	
				I _{OL} = 6 mA	2.7	—	0.4	
				I _{OL} = 8 mA	3.0	—	0.55	
				I _{OL} = 12 mA	3.0	—	0.8	
Input Leakage Current		I _{IIN}	V _{IN} = 0~3.6 V	2.7~3.6	—	± 5.0	μA	
3-State Output Off-State Current		I _{OZ}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0~3.6 V	2.7~3.6	—	± 10.0	μA	
Power Off Leakage Current		I _{OFF}	V _{IN} , V _{OUT} = 0~3.6 V	0	—	10.0	μA	
Quiescent Supply Current		I _{CC}	V _{IN} = V _{CC} or GND		2.7~3.6	—	20.0	μA
			V _{CC} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V		2.7~3.6	—	± 20.0	
Increase In I _{CC} Per Input		ΔI _{CC}	V _{IH} = V _{CC} - 0.6 V		2.7~3.6	—	750	μA

ELECTRICAL CHARACTERISTICS

DC characteristics ($T_a = -40\sim 85^\circ\text{C}$, $2.3\text{ V} \leq V_{CC} \leq 2.7\text{ V}$)

PARAMETER		SYMBOL	TEST CONDITION			MIN	MAX	UNIT
			V _{CC} (V)					
Input Voltage	“H” Level	V _{IH}	2.3~2.7			1.6	—	V
	“L” Level	V _{IL}	2.3~2.7			—	0.7	
Output Voltage	“H” Level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = - 100 μA	2.3~2.7	V _{CC} - 0.2	—	V
				I _{OH} = - 4 mA	2.3	2.0	—	
				I _{OH} = - 6 mA	2.3	1.8	—	
				I _{OH} = - 8 mA	2.3	1.7	—	
	“L” Level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 100 μA	2.3~2.7	—	0.2	
				I _{OL} = 6 mA	2.3	—	0.4	
				I _{OL} = 8 mA	2.3	—	0.6	
Input Leakage Current		I _{IN}	V _{IN} = 0~3.6 V		2.3~2.7	—	± 5.0	μA
3-State Output Off-State Current		I _{OZ}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0~3.6 V		2.3~2.7	—	± 10.0	μA
Power Off Leakage Current		I _{OFF}	V _{IN} , V _{OUT} = 0~3.6 V		0	—	10.0	μA
Quiescent Supply Current		I _{CC}	V _{IN} = V _{CC} or GND		2.3~2.7	—	20.0	μA
			V _{CC} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V		2.3~2.7	—	± 20.0	

ELECTRICAL CHARACTERISTICS

DC characteristics (Ta = -40~85°C, 1.8 V ≤ V_{CC} < 2.3 V)

PARAMETER		SYMBOL	TEST CONDITION			MIN	MAX	UNIT	
			V _{CC} (V)						
Input Voltage	“H” Level	V _{IH}	1.8~2.3			0.7 × V _{CC}	—	V	
	“L” Level	V _{IL}	1.8~2.3			—	0.2 × V _{CC}		
Output Voltage	“H” Level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = - 100 μA	1.8	V _{CC} - 0.2	—	V	
				I _{OH} = - 4 mA	1.8	1.4	—		
	“L” Level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 100 μA	1.8	—	0.2		
				I _{OL} = 4 mA	1.8	—	0.3		
Input Leakage Current		I _{IN}	V _{IN} = 0~3.6V			1.8	—	± 5.0	μA
3-State Output Off-State Current		I _{OZ}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0~3.6 V			1.8	—	± 10.0	μA
Power Off Leakage Current		I _{OFF}	V _{IN} , V _{OUT} = 0~3.6 V			0	—	10.0	μA
Quiescent Supply Current		I _{CC}	V _{IN} = V _{CC} or GND			1.8	—	20.0	μA
			V _{CC} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V			1.8	—	± 20.0	

AC characteristics (Ta = -40~85°C, Input t_r = t_f = 2.0 ns, C_L = 30 pF, R_L = 500 Ω)

PARAMETER		SYMBOL	TEST CONDITION		V _{CC} (V)	MIN	MAX	UNIT
Propagation Delay Time	t _{pLH} t _{pHL}	(Fig.1, 2)			1.8	1.5	5.7	ns
					2.5 ± 0.2	1.0	4.3	
					3.3 ± 0.3	0.8	3.4	
3-State Output Enable Time	t _{pZL} t _{pZH}	(Fig.1, 3)			1.8	1.5	7.6	ns
					2.5 ± 0.2	1.0	5.7	
					3.3 ± 0.3	0.8	4.2	
3-State Output Disable Time	t _{pLZ} t _{pHZ}	(Fig.1, 3)			1.8	1.5	5.7	ns
					2.5 ± 0.2	1.0	4.8	
					3.3 ± 0.3	0.8	4.1	
Output To Output Skew	t _{osLH} t _{osHL}	(Note 11)			1.8	—	0.5	ns
					2.5 ± 0.2	—	0.5	
					3.3 ± 0.3	—	0.5	

For C_L = 50 pF, add approximately 300 ps to the AC maximum specification.

(Note 11) : Parameter guaranteed by design.

$$(t_{osLH} = |t_{pLHm} - t_{pLHn}|, t_{osHL} = |t_{pHLm} - t_{pHLn}|)$$

Dynamic switching characteristics ($T_a = 25^\circ\text{C}$, Input $t_r = t_f = 2.0\text{ ns}$, $C_L = 30\text{ pF}$)

PARAMETER	SYMBOL	TEST CONDITION	$V_{CC}(\text{V})$	TYP.	UNIT
Quiet Output Maximum Dynamic V_{OL}	V_{OLP}	$V_{IH} = 1.8\text{ V}$, $V_{IL} = 0\text{ V}$ (Note 12)	1.8	0.15	V
		$V_{IH} = 2.5\text{ V}$, $V_{IL} = 0\text{ V}$ (Note 12)	2.5	0.25	
		$V_{IH} = 3.3\text{ V}$, $V_{IL} = 0\text{ V}$ (Note 12)	3.3	0.35	
Quiet Output Minimum Dynamic V_{OL}	V_{OLV}	$V_{IH} = 1.8\text{ V}$, $V_{IL} = 0\text{ V}$ (Note 12)	1.8	-0.15	V
		$V_{IH} = 2.5\text{ V}$, $V_{IL} = 0\text{ V}$ (Note 12)	2.5	-0.25	
		$V_{IH} = 3.3\text{ V}$, $V_{IL} = 0\text{ V}$ (Note 12)	3.3	-0.35	
Quiet Output Minimum Dynamic V_{OH}	V_{OHV}	$V_{IH} = 1.8\text{ V}$, $V_{IL} = 0\text{ V}$ (Note 12)	1.8	1.55	V
		$V_{IH} = 2.5\text{ V}$, $V_{IL} = 0\text{ V}$ (Note 12)	2.5	2.05	
		$V_{IH} = 3.3\text{ V}$, $V_{IL} = 0\text{ V}$ (Note 12)	3.3	2.65	

(Note 12) : Parameter guaranteed by design.

Capacitive characteristics ($T_a = 25^\circ\text{C}$)

PARAMETER	SYMBOL	TEST CONDITION	$V_{CC}(\text{V})$	TYP.	UNIT
Input Capacitance	C_{IN}	DIR, $\overline{OE}$	1.8, 2.5, 3.3	6	pF
Bus I/O Capacitance	$C_{I/O}$	An, Bn	1.8, 2.5, 3.3	7	pF
Power Dissipation Capacitance	C_{PD}	$f_{IN} = 10\text{ MHz}$ (Note 13)	1.8, 2.5, 3.3	20	pF


(Note 13) : C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation :

$$I_{CC}(\text{opr.}) = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/16 \text{ (per bit)}$$

TEST CIRCUIT

Fig.1

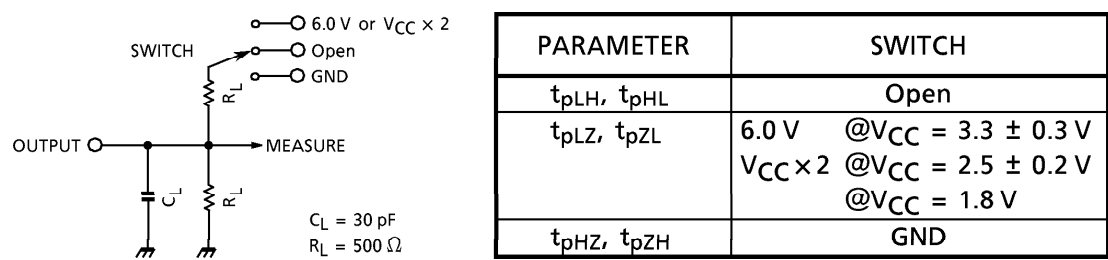

AC WAVEFORM

Fig.2 t_{pLH}, t_{pHL}


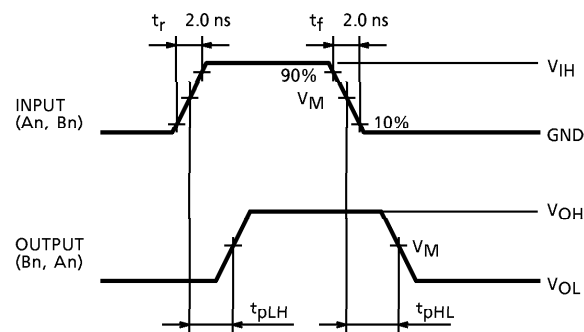



Fig.3 $t_{pLZ}, t_{pHZ}, t_{pZL}, t_{pZH}$

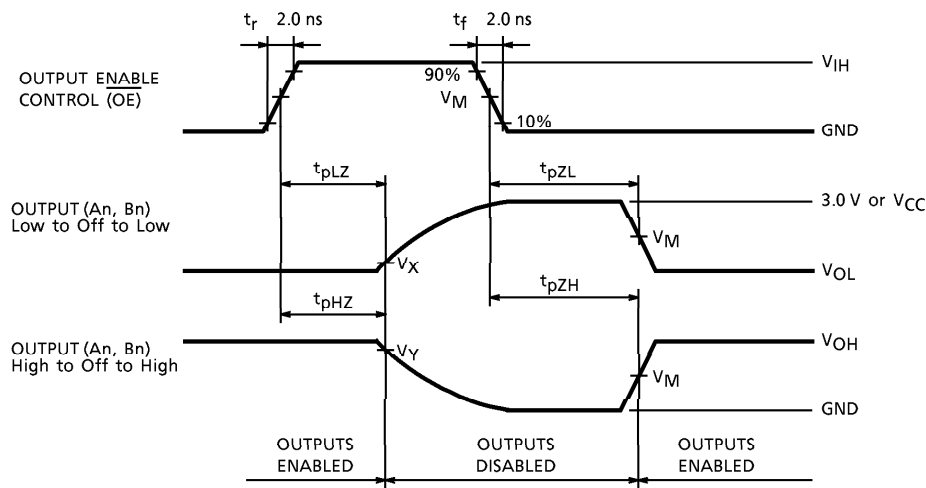

SYMBOL	VCC		
	3.3 ± 0.3 V	2.5 ± 0.2 V	1.8 V
VIH	2.7V	VCC	VCC
VM	1.5V	VCC / 2	VCC / 2
VX	VOL + 0.3 V	VOL + 0.15 V	VOL + 0.15 V
VY	VOH - 0.3 V	VOH - 0.15 V	VOH - 0.15 V

PACKAGE DIMENSIONS
TSSOP48-P-0061-0.50

Unit : mm

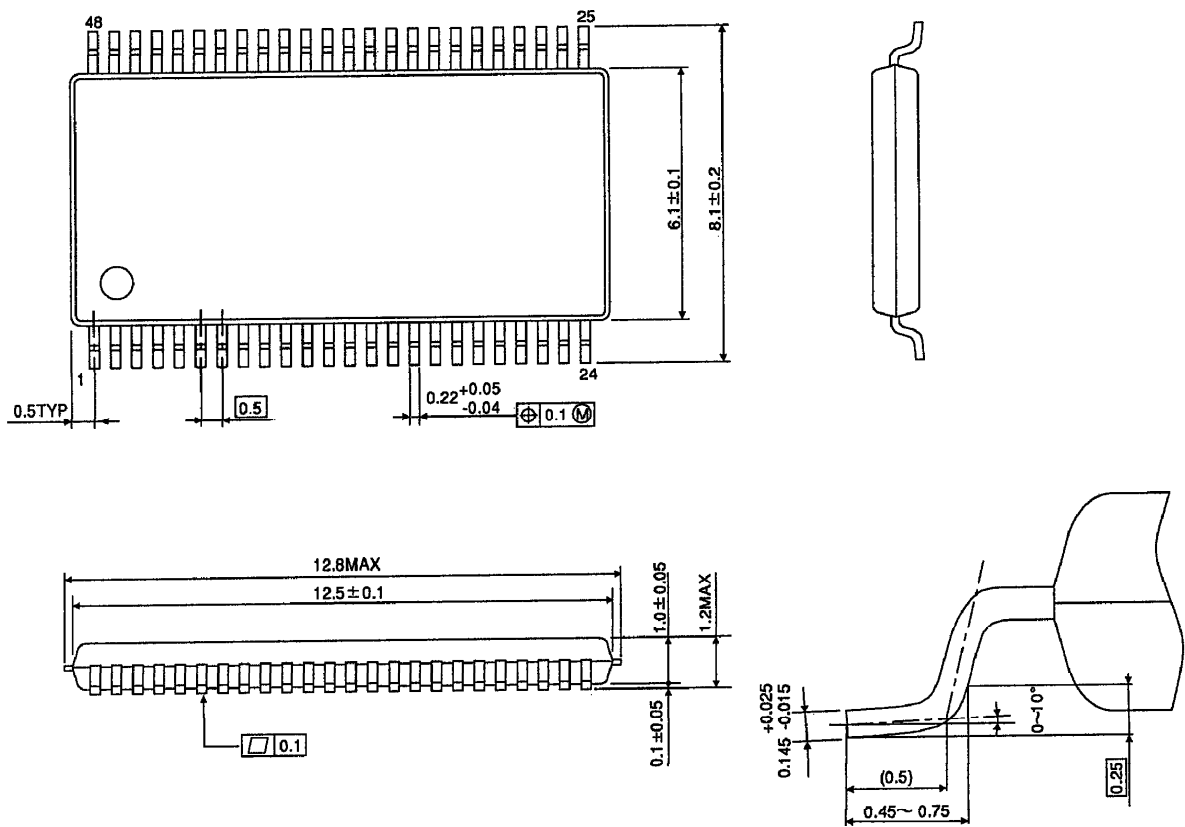

Weight : 0.25 g (Typ.)