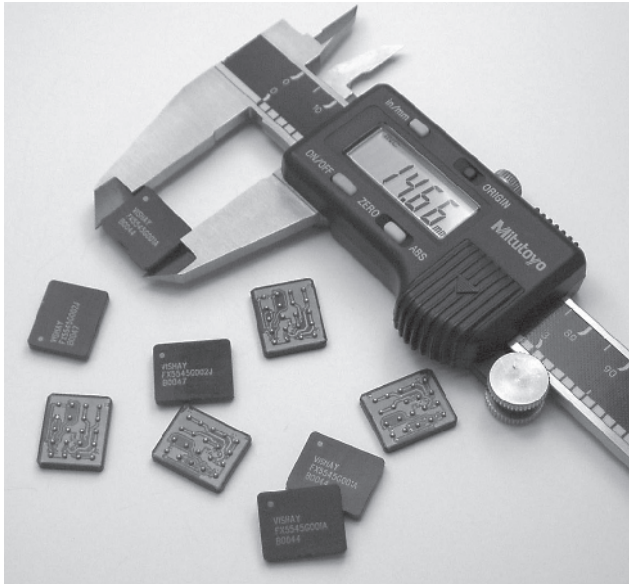


Industry Smallest and Low Profile 15W, 2.5A DC/DC Boost Converter with High Output Power Density



The DC/DC converter is a programmable topology synchronized Boost converter for today's continuous changing portable electronic market. The DC/DC converter provides flexibility of utilizing various battery configurations and chemistries such as NiCd, NiMH, or Li+ with an input voltage range of 2.5V to 6V. An additional flexibility is provided with topology programmability to power multiple loads such as power amplifiers, microcontrollers, or baseband logic IC's. For ultra-high efficiency, converters are designed to operate in synchronous rectified PWM mode under full load while transforming into externally controlled pulse-skipping mode (PSM) under light load. The DC/DC converter is available in 20-ports BGA package. In order to satisfy the stringent ambient temperature requirements, the DC/DC converter is designed to handle the industrial temperature range of - 40°C to + 85°C.

FEATURES

- Fully integrated DC/DC converter
- High efficiency over large load range
- 100% duty cycle
- Power density - more than 550W/inch³
- 1uA shutdown current
- 2.7V to 6V input range (1Li+ and 3-cell NiCd or NiMH cells)
- 3.3V to 6V output voltage
- Programmable PWM/PSM controls
- Low output ripple
- BGA construction
- Temperature range: - 40°C to + 85°C
- No external components required
- Output power 15W
- Maximum current 2.5A
- Low profile



APPLICATIONS

- Point of Load (POL) applications such as drivers for FPGA's, microprocessors, DSP's, amplifiers, etc.
- Cordless phones, PDA's and others
- Supply voltage source for low-voltage chip sets
- Portable computers
- Battery back-up supplies
- Cameras


ORDERING INFORMATION

	FX	5545	G206	☐	☐	☐	☐	☐
FUNCTION								
SIZE								
CIRCUIT IDENTIFIER								
OUTPUT VOLTAGE - Example: 3.3V should be written as 3V3 as the V indicates the decimal point, or ADJ for adjustable version - self selectable output voltage.								
PACKAGING - B1 = 10pcs in bulk; B5 = 50pcs in bulk; T1 = 13" reel; T2 = 7" reel.								

DIMENSIONS in inches [millimeters]	
L	0.58 ± 0.01 [14.7 $\pm$ 0.25]
W	0.48 ± 0.01 [12.2 $\pm$ 0.25]
A	0.1 ± 0.01 [2.54 $\pm$ 0.25]
B	0.09 ± 0.01 [2.29 $\pm$ 0.25]
C	0.09 ± 0.01 [2.27 $\pm$ 0.25]
T	0.12 max [3 max]
Ball Diameter	0.03 ± 0.001 [0.762 $\pm$ 0.025]



BOTTOM SIDE



Marked on Upper Side

Note:

*Pin Description application note is available on page 52.


**If not used must be connected to Vin.

PIN CONFIGURATION*

PIN	CONNECTION
1, 2	$\overline{\text{SD}}$
3, 7	SYNC**
4, 8	N/C
5, 9	Vin
6, 10	PWM/ $\overline{\text{PSM}}$
11, 12	N/C
13, 17	GND
14, 18	Vout
15, 19	N/C
16, 20	GND

RECOMMENDED PAD PATTERN in inches [millimeters]

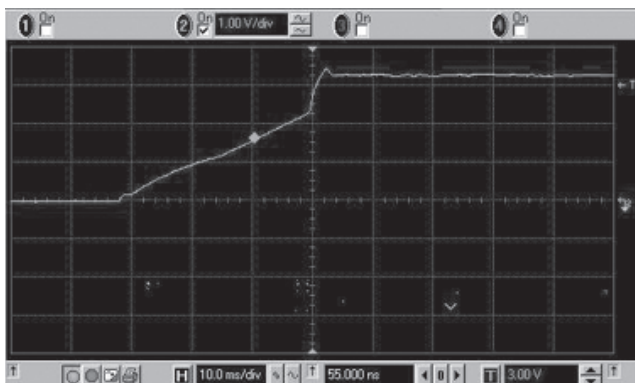
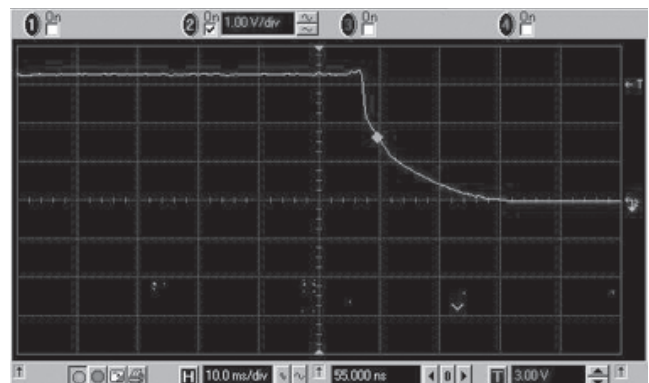
A	D	F
0.1 ± 0.01 [2.54 $\pm$ 0.25]	0.03 ± 0.001 [0.8 $\pm$ 0.02]	0.02 ± 0.001 [0.5 $\pm$ 0.02]

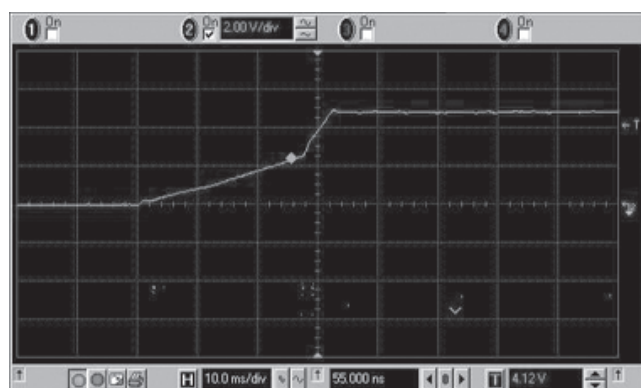
**TAPE AND REEL**

See Tape and Reel Information - Type B

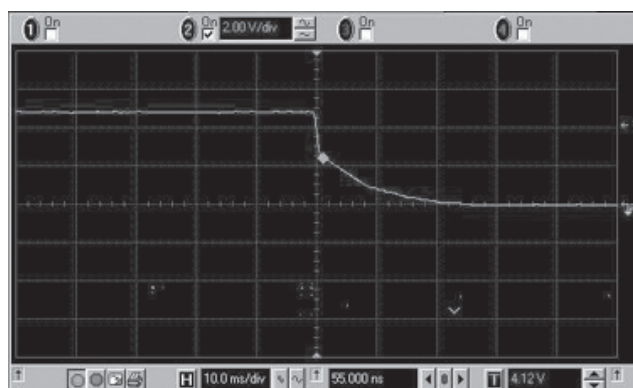
**STANDARD ELECTRICAL SPECIFICATIONS**

PARAMETER	UNIT	CONDITION	MINIMUM	TYPICAL	MAXIMUM
Input					
Voltage Range	V_{DC}		2.7		6.0
Quiescent Current	μA	PSM mode		200	
Soft Start Time	ms	T_{SS} for $V_{out} = 6.0V$		22	
		T_{SS} for $V_{out} = 5.0V$		22	
		T_{SS} for $V_{out} = 3.3V$		19	
SD, PWM/PSM, SYNC					
Logic High	V	V_H	2.4		
Logic Low	V	V_L			0.8
Normal Mode	μA	I_{DD}			750
PSM Mode	μA	I_{DD}			250
Shutdown Mode	μA	I_{DD}			1
Shutdown Time	ms	T_{SS} for $V_{out} = 6.0V$		15	
		T_{SS} for $V_{out} = 5.0V$		14	
		T_{SS} for $V_{out} = 3.3V$		14	
Insulation					
Test Voltage	V_{AC}	60Hz 60sec	750		
Resistance	Ω	$V_{ISO} = 500V_{DC}$	1×10^{11}		
Leakage Current	nA	$V_{ISO} = 500V_{DC}$			5
Output					
Power	W			15	
Voltage	V_{DC}			3.3 - 6	
Voltage Tolerance	%	at 25°C ambient temperature	- 3		3
Temp. Coefficient	%/°C				0.03
Ripple and Noise	mVpp	DC to 20MHz		80	
General					
Package Weight	gr.				1.5
Oscillator					
Frequency	KHz			670	
SYNC Range		F_{SYNC}/F_{OSC}	1.2		1.5
Temperature					
Operation	°C		- 40		+ 85
Storage	°C		- 55		+ 125
Operating Junction Temp.	°C	T_j		150	
Thermal Impedance	°C/W _D *	θ_{JA}		82	

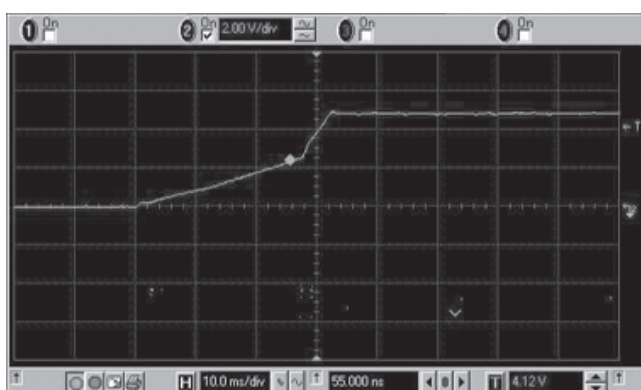
Note:*W_D = Power Dissipated**Rise Time**Rise Time (PWM mode): $V_{in} = 3V$; $V_{out} = 3.3V$; $I_{out} = 2.5A$ **Fall Time**Fall Time (PWM mode): $V_{in} = 3V$; $V_{out} = 3.3V$; $I_{out} = 2.5A$

Rise Time

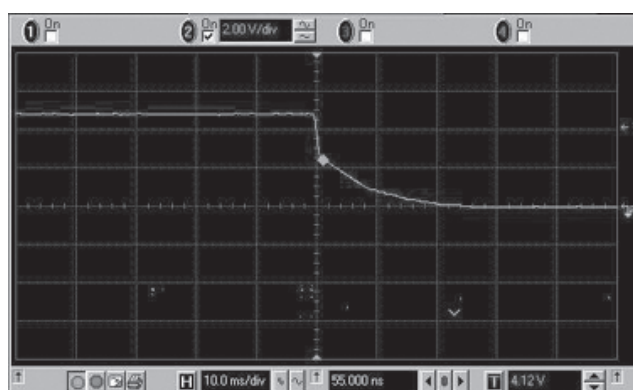
Rise Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 2A

Fall Time

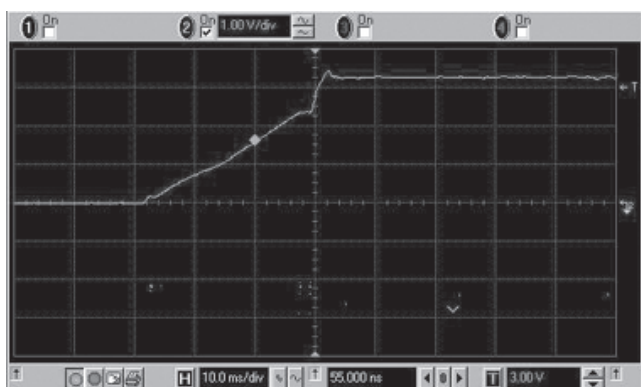
Fall Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 2A



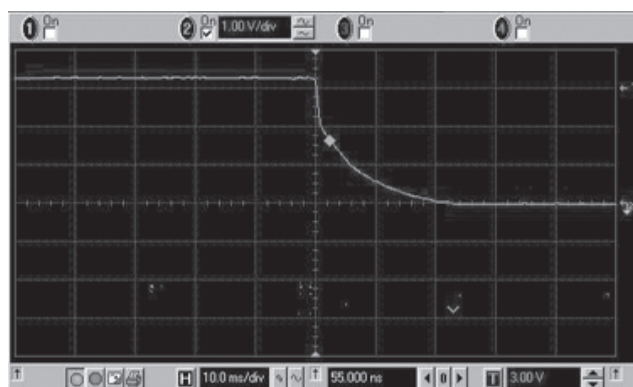
Rise Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 2A



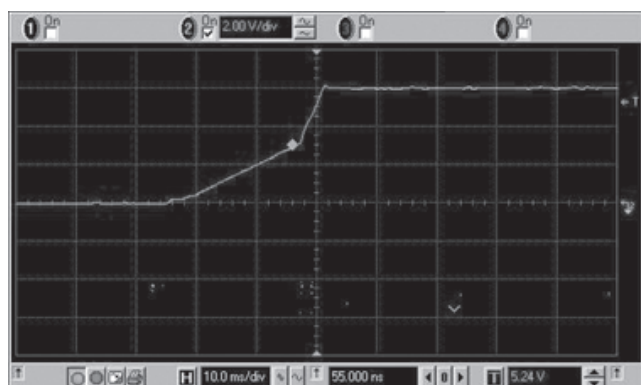
Fall Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 2A



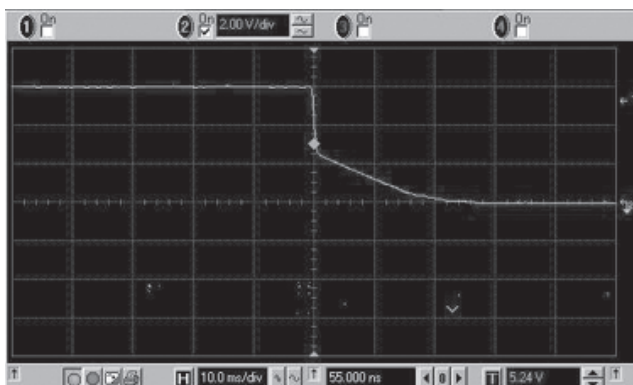
Rise Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 2A



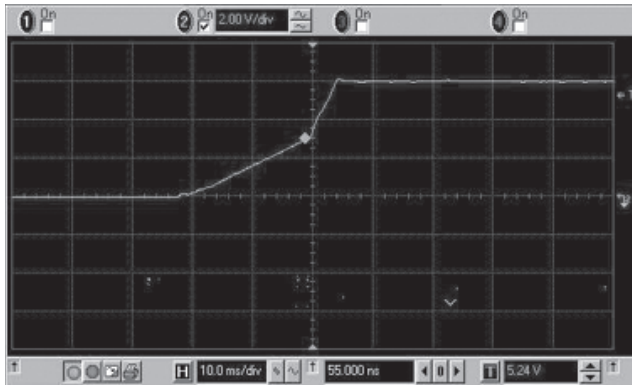
Fall Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 2A



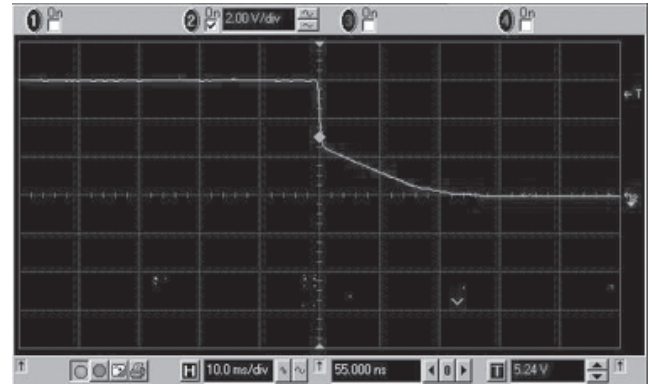
Rise Time (PWM mode): Vin = 5V; Vout = 6V; Iout = 1A



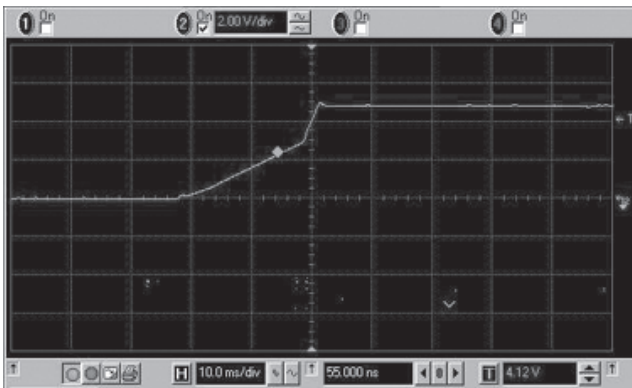
Fall Time (PWM mode): Vin = 5V; Vout = 6V; Iout = 1A

Rise Time


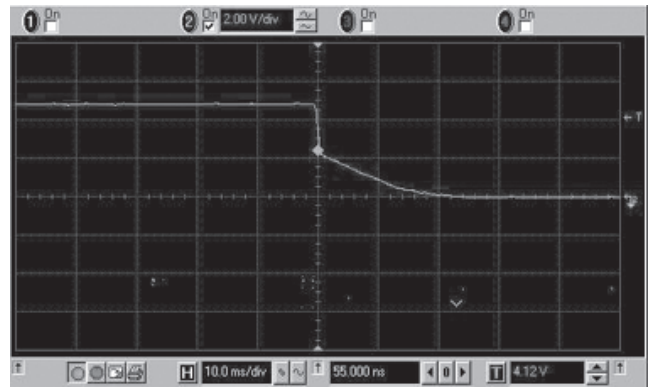
Rise Time (PWM mode): Vin = 4V; Vout = 6V; Iout = 1A

Fall Time


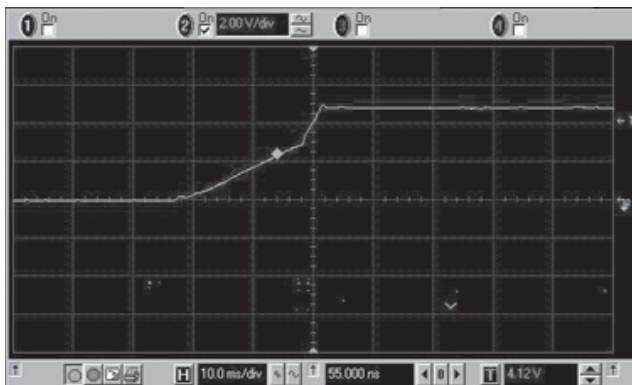
Fall Time (PWM mode): Vin = 4V; Vout = 6V; Iout = 1A



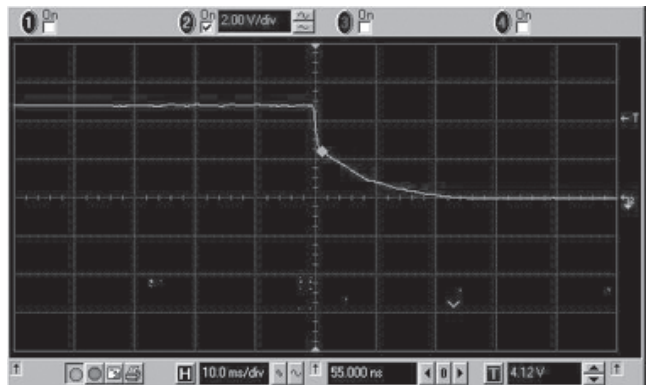
Rise Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 1A



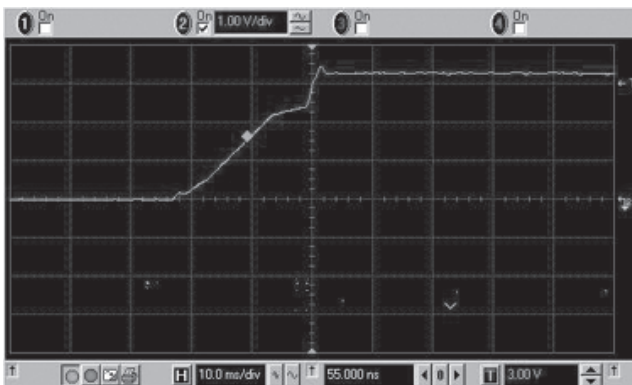
Fall Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 1A



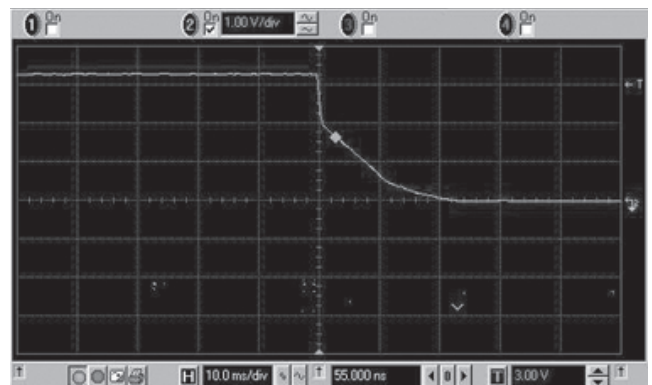
Rise Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 1A



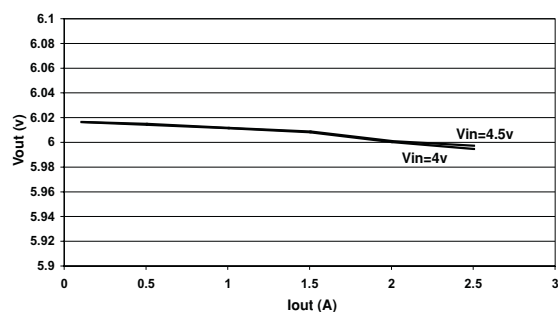
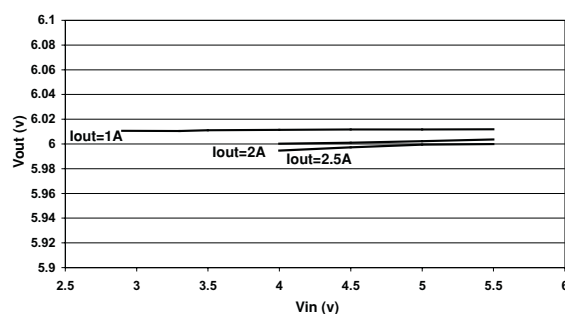
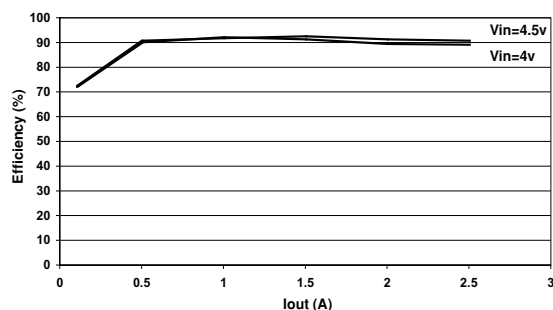
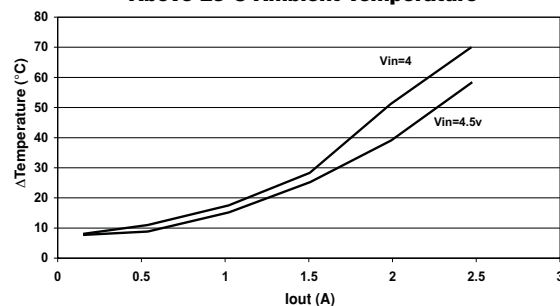
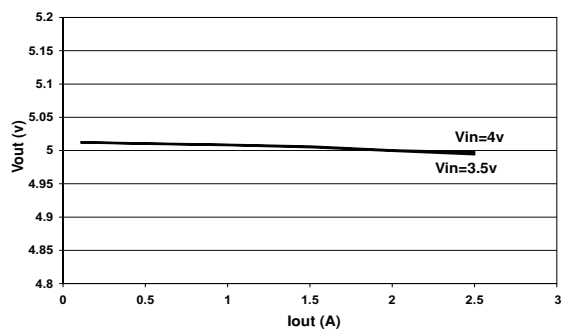
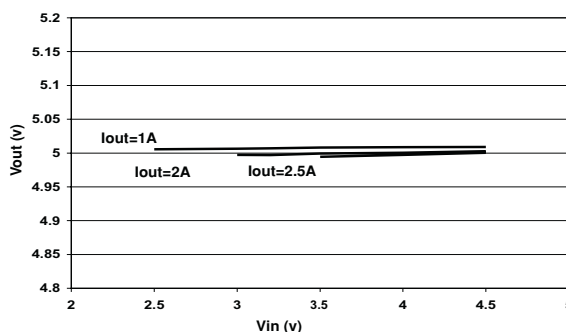
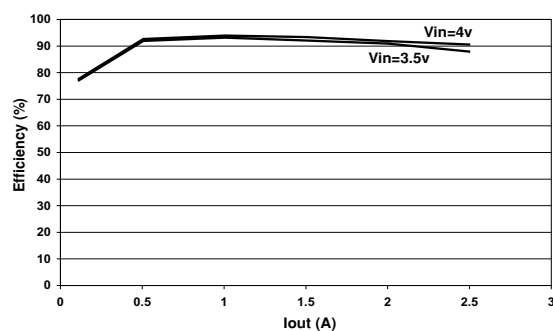
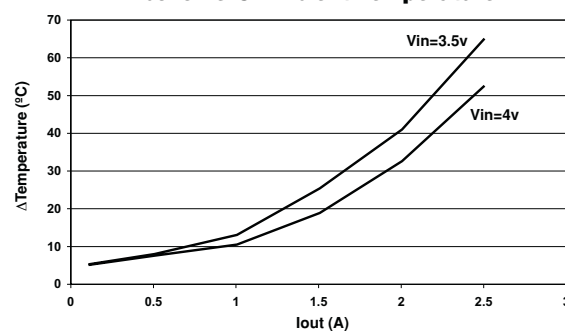
Fall Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 1A



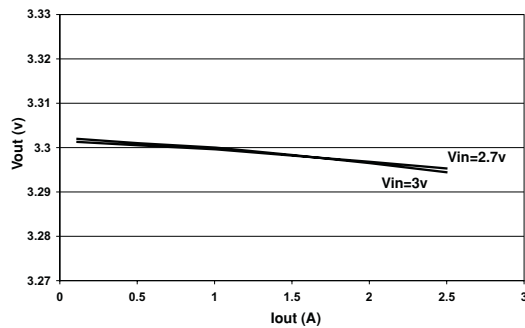
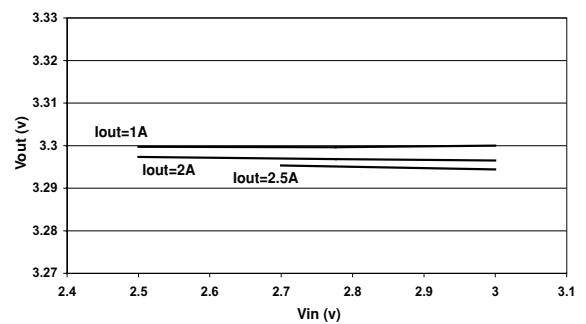
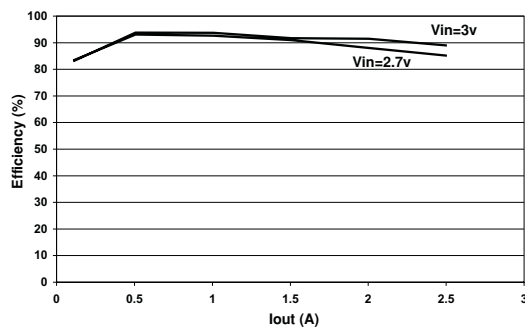
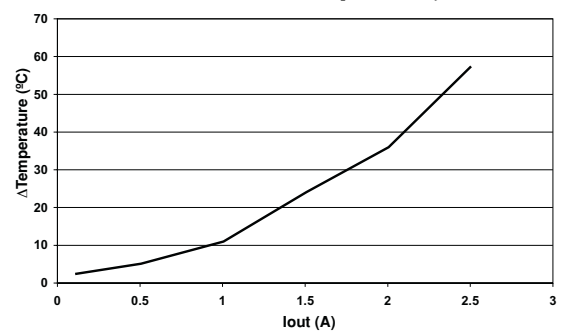
Rise Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 1A



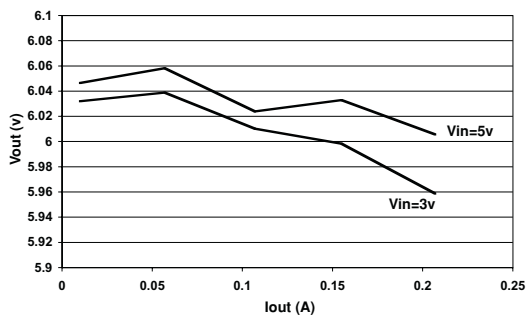
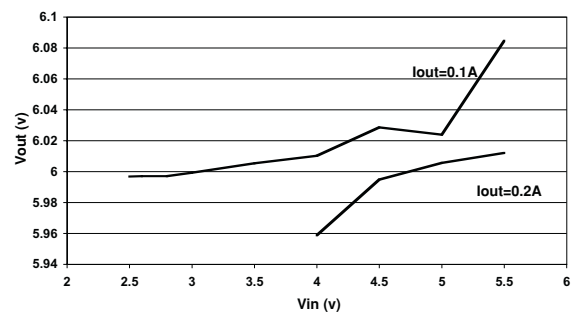
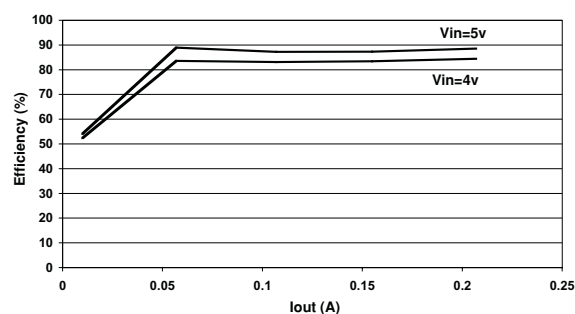
Fall Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 1A

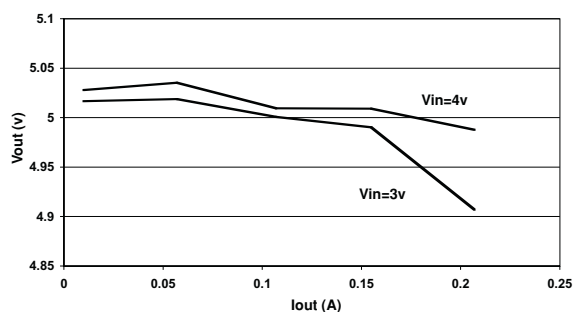
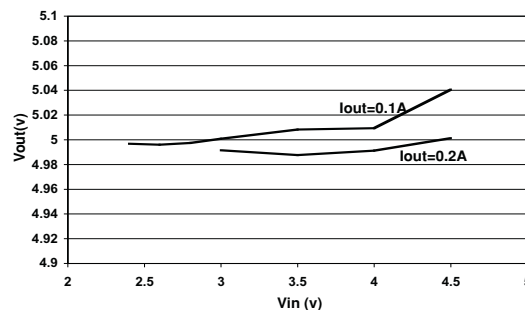
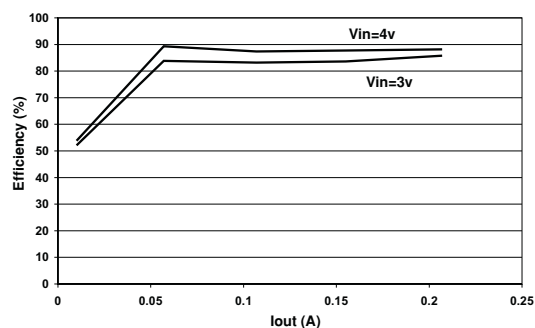
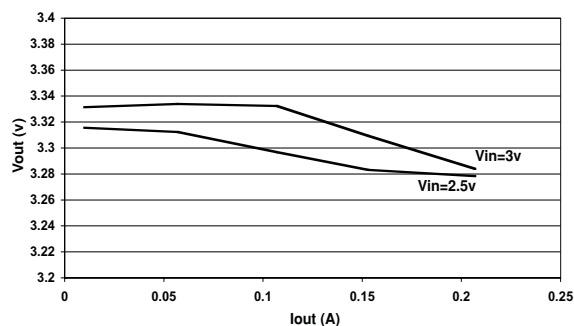
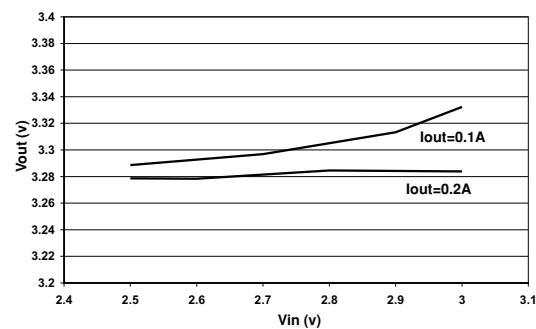
PWM MODE 6V**Vout vs. Iout****Vout vs. Vin****Efficiency vs. Iout** **Δ Temperature Vs. Iout
Above 25°C Ambient Temperature****PWM MODE 5V****Vout vs. Iout****Vout vs. Vin****Efficiency vs. Iout** **Δ Temperature vs. Iout
Above 25°C Ambient Temperature**

PWM MODE 3.3V

Vout vs. Iout

Vout vs. Vin

Efficiency vs. Iout

**ΔTemperature vs. Iout
Above 25°C Ambient Temperature; Vin=2.5V**


PSM MODE 6V

Vout vs. Iout

Vout vs. Vin

Efficiency vs. Iout


PSM MODE 5V**Vout vs. Iout****Vout vs. Vin****Efficiency vs. Iout****PSM MODE 3.3V****Vout vs. Iout****Vout vs. Vin****Efficiency vs. Iout**