

200 mW SOD323
Zener Voltage Regulator Diodes
GENERAL DATA APPLICABLE TO ALL
SERIES IN THIS GROUP
Zener Voltage
Regulator Diodes

Manufacturing Locations:

WAFER FAB: Phoenix, Arizona

ASSEMBLY: Leshan, China

TEST: Leshan, China

MAXIMUM CASE TEMPERATURE FOR SOLDERING

PURPOSES: 260°C for 10 seconds



ESD RATING: Exceeding 16 kV per the Human Body Model

AVAILABLE IN 8 MM TAPE AND REEL:

3000 Unit per Reel for All Devices with T1 Suffix

**MM3Z2V4T1 SE-
RIES**

200 MILLIWATTS
SOD323



CASE 477-02, STYLE 1
SOD323

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board,* $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	200 1.57	mW mW/ $^\circ\text{C}$
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	635	$^\circ\text{C/W}$
Junction and Storage Temperature	T_J, T_{stg}	150	$^\circ\text{C}$

*FR-4 Minimum Pad

GENERAL DATA — 200 mW SOD323

ELECTRICAL CHARACTERISTICS ($V_F = 0.9 \text{ V Max @ } I_F = 10 \text{ mA}$ for all types.)

Device	Marking	Test Current I_{ZT} mA	Zener Voltage $V_Z (\pm 5\%)$ Nominal (Note 1)	Z_{ZK} $I_Z = 0.5 \text{ mA}$ $\Omega \text{ Max}$	Z_{ZT} $I_Z = I_{ZT}$ @ 10% Mod $\Omega \text{ Max}$	Max I_R μA	@ V_R V	dv_Z/dt (mV/k) @ $I_{ZT1} = 5 \text{ mA}$		C pF Max @ $V_R = 0$ f = 1 MHz
								Min	Max	
MM3Z2V4T1	00	5	2.4	1000	100	50	1	-3.5	0	450
MM3Z3V9T1	07	5	3.9	1000	90	3	1	-3.5	-2.5	450
MM3Z4V3T1	08	5	4.3	1000	90	3	1	-3.5	0	450
MM3Z4V7T1	09	5	4.7	800	80	3	2	-3.5	0.2	260
MM3Z5V1T1	0A	5	5.1	500	60	2	2	-2.7	1.2	225
MM3Z5V6T1	0C	5	5.6	200	40	1	2	-2.0	2.5	200
MM3Z6V2T1	0E	5	6.2	100	10	3	4	0.4	3.7	185
MM3Z6V8T1	0F	5	6.8	60	15	2	4	1.2	4.5	155
MM3Z7V5T1	0G	5	7.5	60	15	1	5	2.5	5.3	140
MM3Z8V2T1	0H	5	8.2	60	15	0.7	5	3.2	6.2	135
MM3Z9V1T1	0K	5	9.1	60	15	0.5	6	3.8	7.0	130
MM3Z10VT1	0L	5	10	60	20	0.2	7	4.5	8.0	130
MM3Z11VT1	0M	5	11	60	20	0.1	8	5.4	9.0	130
MM3Z12VT1	0N	5	12	80	25	0.1	8	6.0	10.0	130
MM3Z13VT1	0P	5	13	80	30	0.1	8	7.0	11.0	120
MM3Z15VT1	0T	5	15	80	30	0.05	10.5	9.2	13.0	110
MM3Z16VT1	0U	5	16	80	40	0.05	11.2	10.4	14.0	105
MM3Z18VT1	0W	5	18	80	45	0.05	12.6	12.4	16.0	100
MM3Z20VT1	0Z	5	20	100	55	0.05	14	14.4	18.0	85
MM3Z22VT1	10	5	22	100	55	0.05	15.4	16.4	20.0	85
MM3Z24VT1	11	5	24	120	70	0.05	16.8	18.4	22.0	80
Device	Marking	Test Current I_{ZT} mA	Zener Voltage $V_Z (\pm 5\%)$ Nominal (Note 1)	Z_{ZK} $I_Z = 0.5 \text{ mA}$ $\Omega \text{ Max}$	Z_{ZT} $I_Z = I_{ZT}$ @ 10% Mod $\Omega \text{ Max}$	Max I_R μA	@ V_R V	dv_Z/dt (mV/k) Below @ $I_{ZT1} = 2 \text{ mA}$		C pF Max @ $V_R = 0$ f = 1 MHz
								Min	Max	
MM3Z27VT1	12	2	27	300	80	0.05	18.9	21.4	25.3	70
MM3Z75VT1	1G	2	75	500	255	0.05	52.5	73.4	88.6	35

NOTE 1. Zener voltage is measured with a pulse test current (I_{ZT}) applied at an ambient temperature of 25°C.

GENERAL DATA — 200 mW SOD323

TYPICAL CHARACTERISTICS

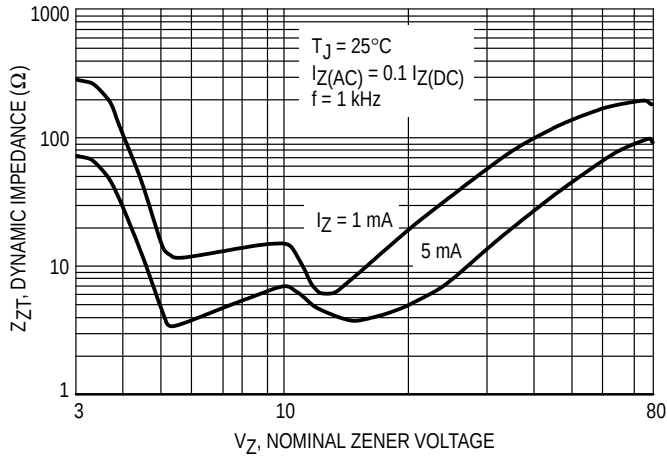


Figure 1. Effect of Zener Voltage on Zener Impedance

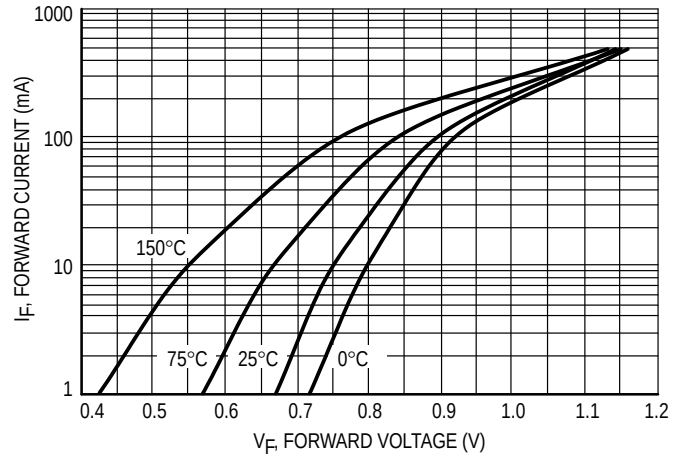


Figure 2. Typical Forward Voltage

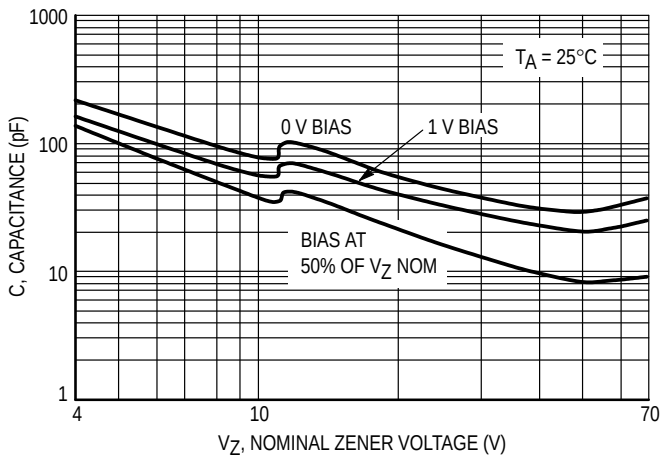


Figure 3. Typical Capacitance

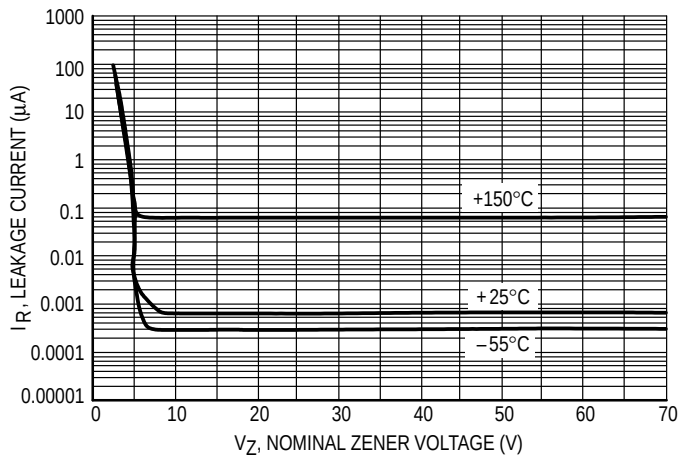


Figure 4. Typical Leakage Current

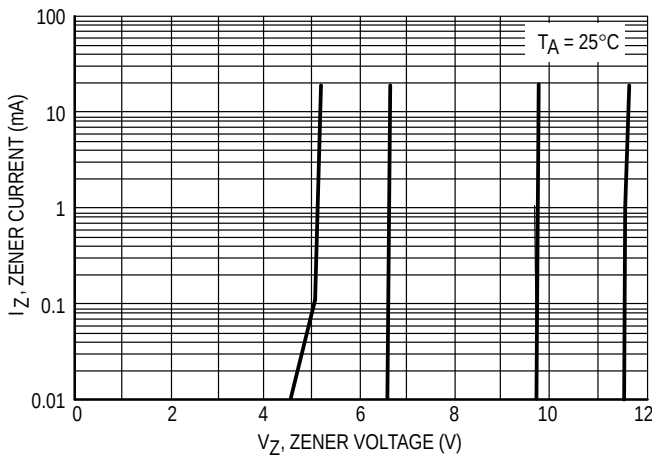


Figure 5. Zener Voltage versus Zener Current (V_Z Up to 12 V)


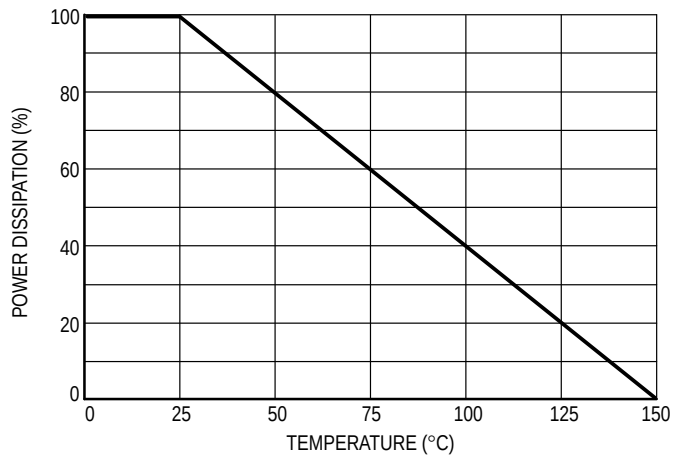


Figure 6. Steady State Power Derating

GENERAL DATA — 200 mW SOD323

OUTLINE DIMENSIONS

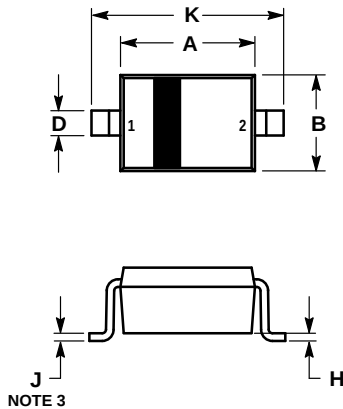

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. LEAD THICKNESS SPECIFIED PER L/F DRAWING WITH SOLDER PLATING.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.60	1.80	0.063	0.071
B	1.15	1.35	0.045	0.053
C	0.80	1.00	0.031	0.039
D	0.25	0.40	0.010	0.016
E	0.15 REF		0.006 REF	
H	0.00	0.10	0.000	0.004
J	0.089	0.177	0.0035	0.0070
K	2.30	2.70	0.091	0.106

STYLE 1:

- PIN 1: CATHODE
- ANODE

CASE 477-02 ISSUE A SOD323



SOD-323

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPD, Strategic Planning Office, 141,
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan. 81-3-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848
– http://sps.motorola.com/mfax/

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
2, Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.
852-26629298

HOME PAGE: <http://motorola.com/sps/>



MOTOROLA



MM322V4T1/D