

## Description


- Extremely low collector-to-emitter saturation voltage  
( $V_{CE(SAT)} = 0.2V$  Typ. @  $I_C/I_B = 3A/150\text{ mA}$ )
- Suitable for low voltage large current drivers
- Switching Application

## Ordering Information

Type NO.	Marking	Package Code
STD361	YA	SOT-89

## Outline Dimensions

unit : mm

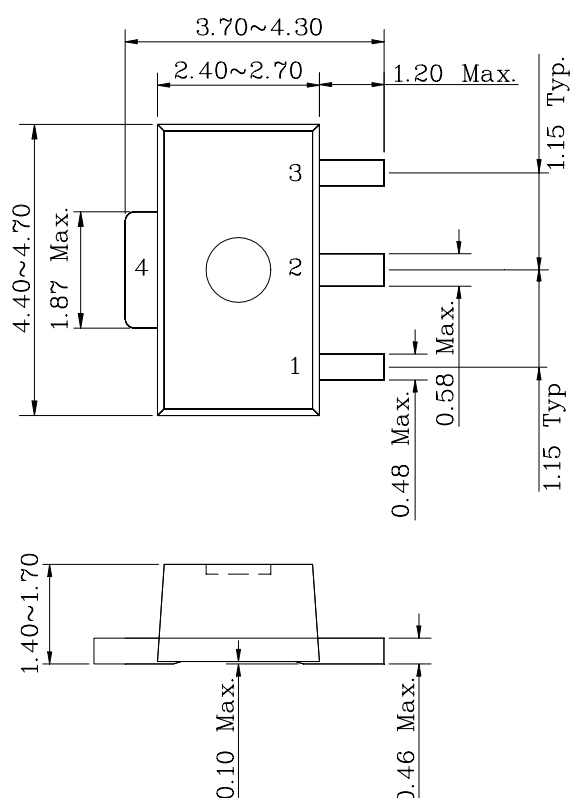

### PIN Connections

1. Base
2. Collector
3. Emitter

**Absolute maximum ratings**

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	$V_{CBO}$	40	V
Collector-Emitter voltage	$V_{CEO}$	15	V
Emitter-Base voltage	$V_{EBO}$	7	V
Collector current	$I_C$	5	A
Collector power dissipation	$P_C$	0.5	W
	$P_C^*$	2	
Junction temperature	$T_J$	150	°C
Storage temperature	$T_{stg}$	-55~150	°C

\* : When mounted on 40×40×0.8 mm ceramic substate

**Electrical Characteristics**

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	$BV_{CBO}$	$I_C=50\ \mu A, I_E=0$	40	-	-	V
Collector-Emitter breakdown voltage	$BV_{CEO}$	$I_C=1\ mA, I_B=0$	15	-	-	V
Emitter-Base breakdown voltage	$BV_{EBO}$	$I_E=50\ \mu A, I_C=0$	7	-	-	V
Collector cut-off current	$I_{CBO}$	$V_{CB}=30V, I_E=0$	-	-	0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	0.1	$\mu A$
DC current gain	$h_{FE1}$	$V_{CE}=2V, I_C=500\ mA$	160	-	320	-
	$h_{FE2}$	$V_{CE}=2V, I_C=3A$	40	-	-	-
Collector-Emitter saturation voltage	$V_{CE(sat)}$	$I_C=3A, I_B=150\ mA$	-	-	0.3	V
Transition frequency	$f_T$	$V_{CE}=6V, I_E=-50\ mA$	-	150	-	MHz
Collector output capacitance	$C_{ob}$	$V_{CB}=20V, I_E=0, f=1\ MHz$	-	-	50	pF

# Electrical Characteristic Curves

Fig. 1  $P_c - T_a$

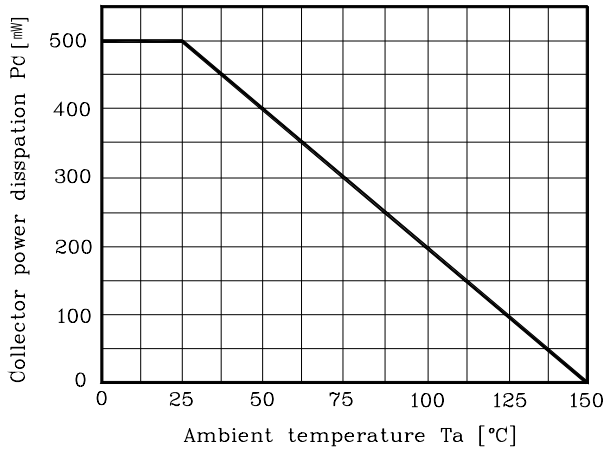


Fig. 2  $h_{FE} - I_C$

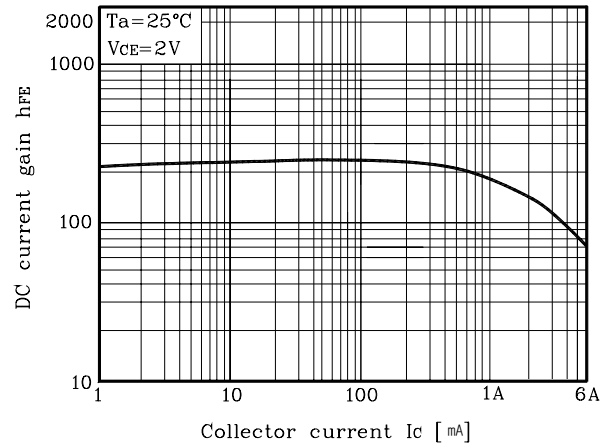


Fig. 3  $V_{CE(sat)} - I_C$

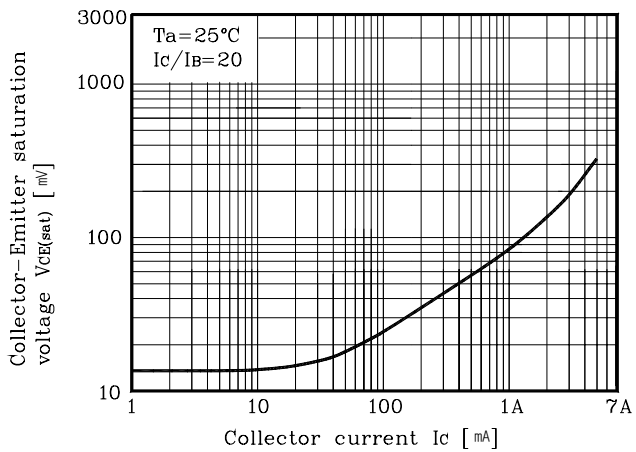


Fig. 4  $f_T - I_C$


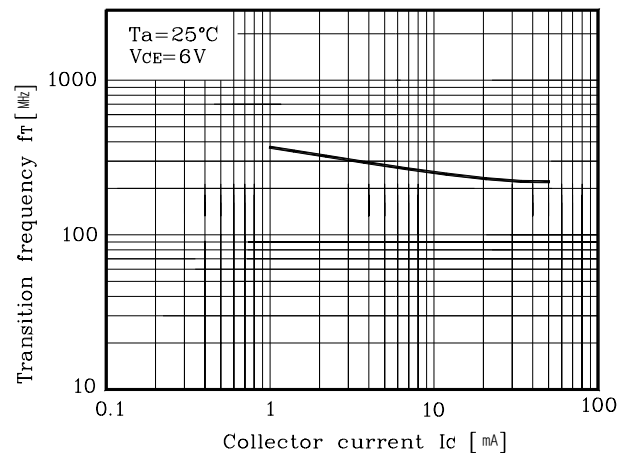


Fig. 5  $C_{ob} - V_{CB}$

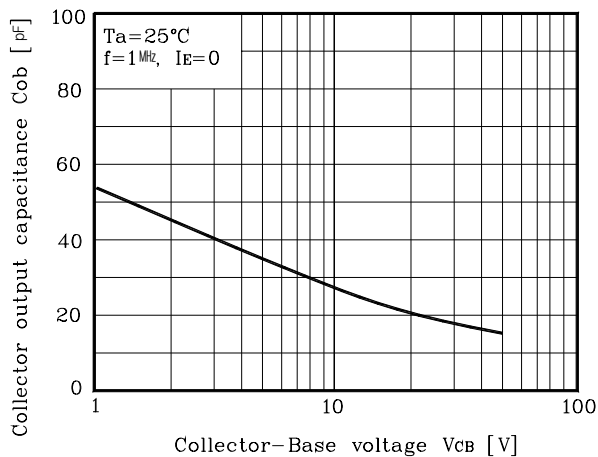

**These AUK products are intended for usage in general electronic equipments(Office and communication equipment, measuring equipment, domestic electrification, etc.).**

**Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).**

**AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.**