


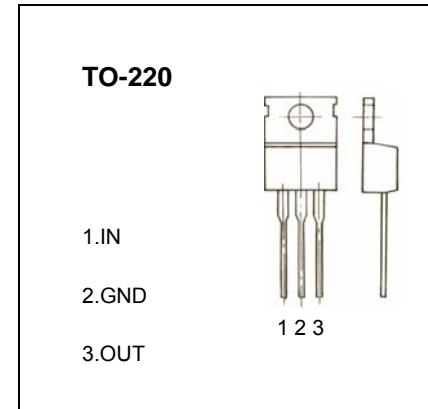

JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD


## TO-220 Plastic-Encapsulate Voltage Regulator

**CJ7812** Three-terminal positive voltage regulator**FEATURES****Maximum Output current  $I_{OM}$ : 1.5 A****Output voltage  $V_o$ : 12 V****Continuous total dissipation** **$P_D$ : 2 W ( $T_J = 25^\circ C$ )****15 W ( $T_C = 25^\circ C$ )****ABSOLUTE MAXIMUM RATINGS(Operating temperature range applies unless otherwise specified)**

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal resistance junction-air	$R \theta JA$	65	°C/W
Thermal resistance junction-cases	$R \theta JC$	5	°C/W
Operating Junction Temperature Range	$T_{OPR}$	0~150	°C
Storage Temperature Range	$T_{STG}$	-65~150	°C

**ELECTRICAL CHARACTERISTICS( $V_i=19V, I_o=500mA, 0^\circ C < T_J < 125^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	$T_J=25^\circ C$	11.5	12.0	12.5	V
		$I_o = 5.0mA - 1.0A, P < 15W$ $14.5V \leqslant V_i \leqslant 27V$	11.4	12	12.6	V
Load Regulation	$\Delta V_o$	$T_J=25^\circ C, 14.5V \leqslant V_i \leqslant 30V$		10	240	mV
		$T_J=25^\circ C, 16V \leqslant V_i \leqslant 22V$		3	120	mV
Line regulation	$\Delta V_o$	$T_J=25^\circ C, I_o = 5.0mA - 1.5A$		11	240	mV
		$T_J=25^\circ C, I_o = 250mA - 750mA$		5.0	120	mV
Quiescent Current	$I_q$	$T_J=25^\circ C$		5.1	8	mA
Quiescent Current Change	$\Delta I_q$	$5.0mA \leqslant I_o \leqslant 1.0A$			0.5	mA
		$14.5V \leqslant V_i \leqslant 30V$			1.0	mA
Output voltage drift	$\Delta V_o / \Delta T$	$I_o = 5mA$		-1		mV/°C
Output Noise Voltage	$V_N$	$f = 10Hz \text{ to } 100KHz, T_J = 25^\circ C$		76		μV
Ripple Rejection	$RR$	$f = 120Hz, 15V \leqslant V_i \leqslant 25V$	55	71		dB
Dropout Voltage	$V_d$	$I_o = 1.0A, T_J = 25^\circ C$		2		V
Output resistance	$R_o$	$f = 1KHz$		18		mΩ
Short Circuit Current	$I_{sc}$	$V_i = 35V, T_J = 25^\circ C$		230		mA
Peak Current	$I_{pk}$	$T_J = 25^\circ C$		2.2		A

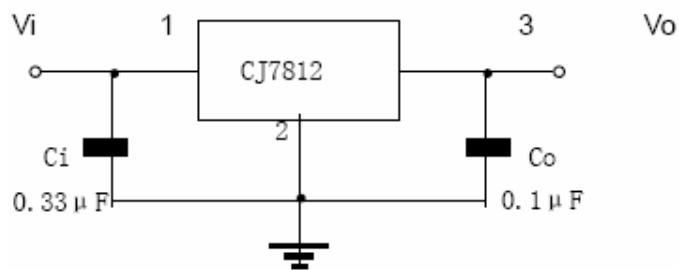**TYPICAL APPLICATION**

## Typical Characteristics

CJ7812

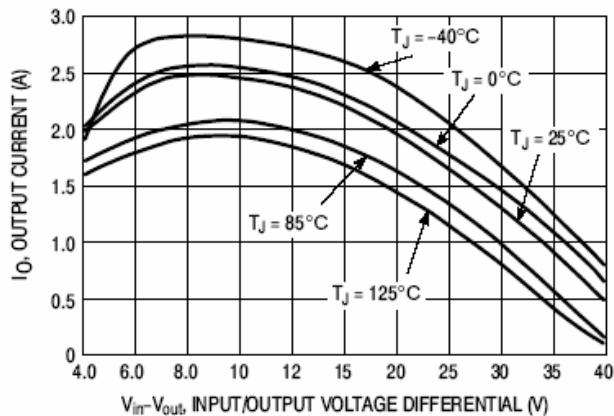


Figure 1. Peak Output Current as a Function of Input/Output Differential Voltage

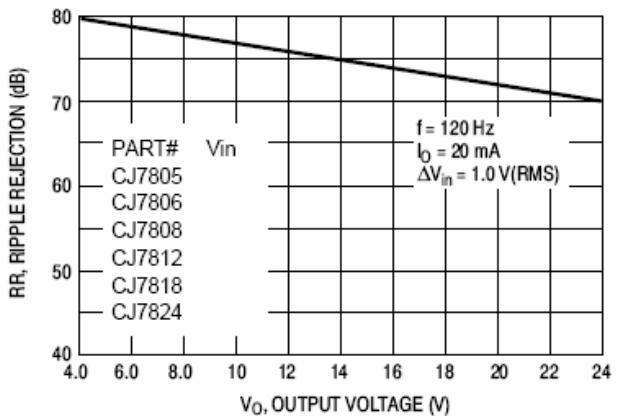


Figure 2. Ripple Rejection as a Function of Output Voltages

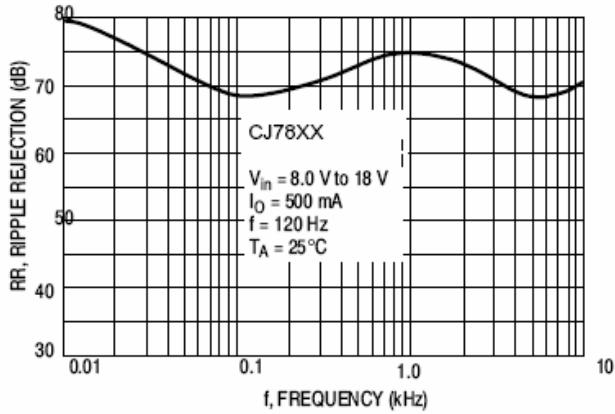


Figure 4. Ripple Rejection as a Function of Frequency

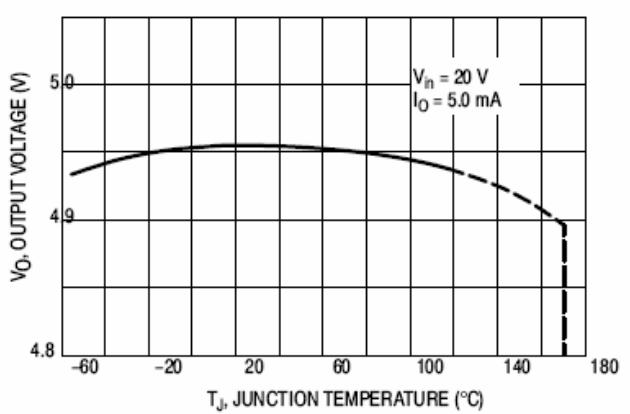


Figure 5. Output Voltage as a Function of Junction Temperature

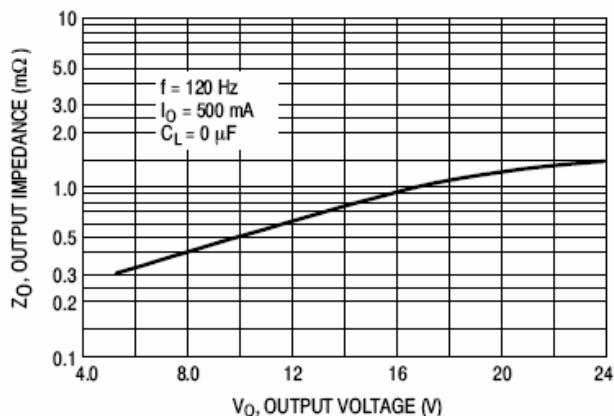


Figure 6. Output Impedance as a Function of Output Voltage

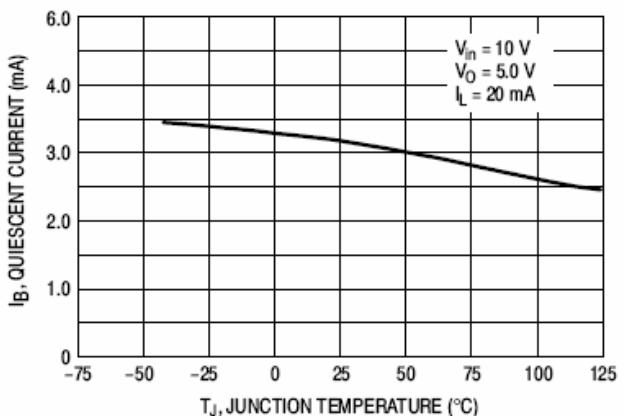


Figure 7. Quiescent Current as a Function of Temperature