

2012 Size

925/960 MHz  
Chip Multilayer Coupler


FSLC-S090T-P

All the technical data and information contained herein are subject to change without notice.




LC-FSLC-S090T-P-0409A

## Equivalent Circuits

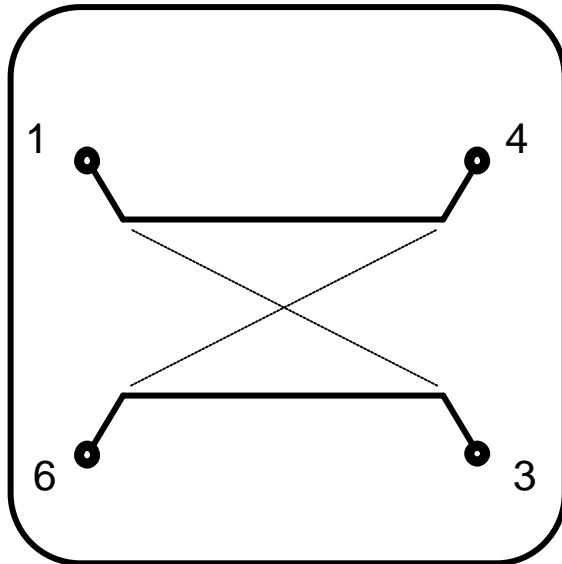

## Shape & Size

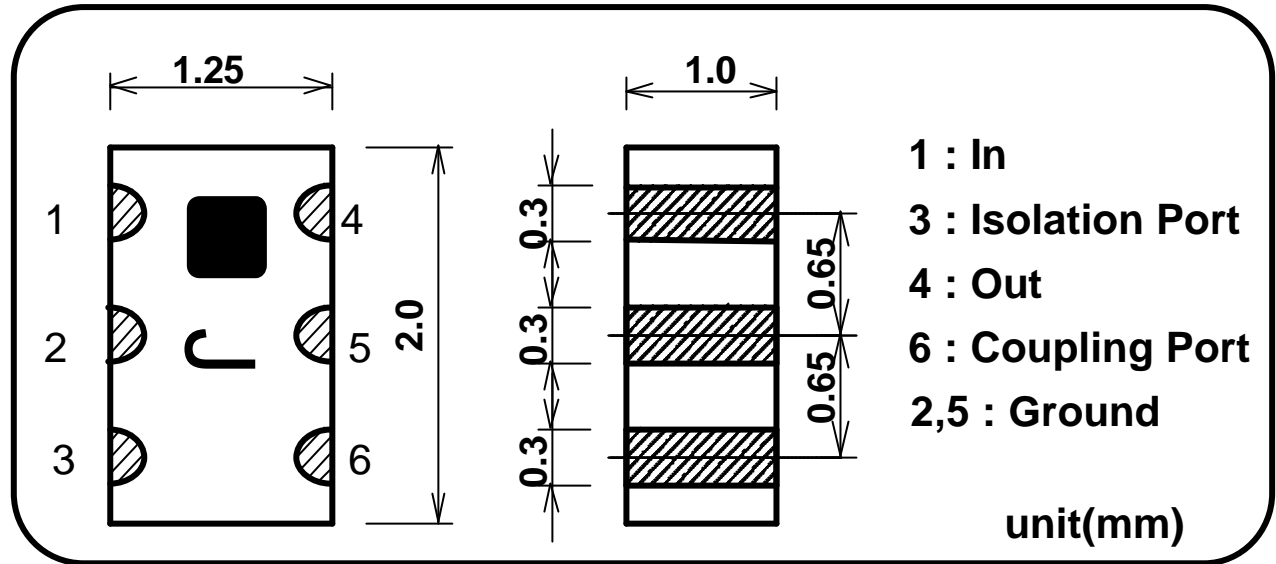

## Specifications


Part Name: FSLC-S090T-P

Frequency Range	Coupling	Insertion Loss	Isolation	Return Loss	Handling Power	Temperature Range
925-960MHz	10.0 +/- 1.5dB	1.0dB Max. (0.6dB Typ.)	23dB Typ.	17dB Min. (25dB Typ.)	1W Max. (CW)	-35 to +85 deg.C

All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S090T-P-0409A

# FOOT PATTERN


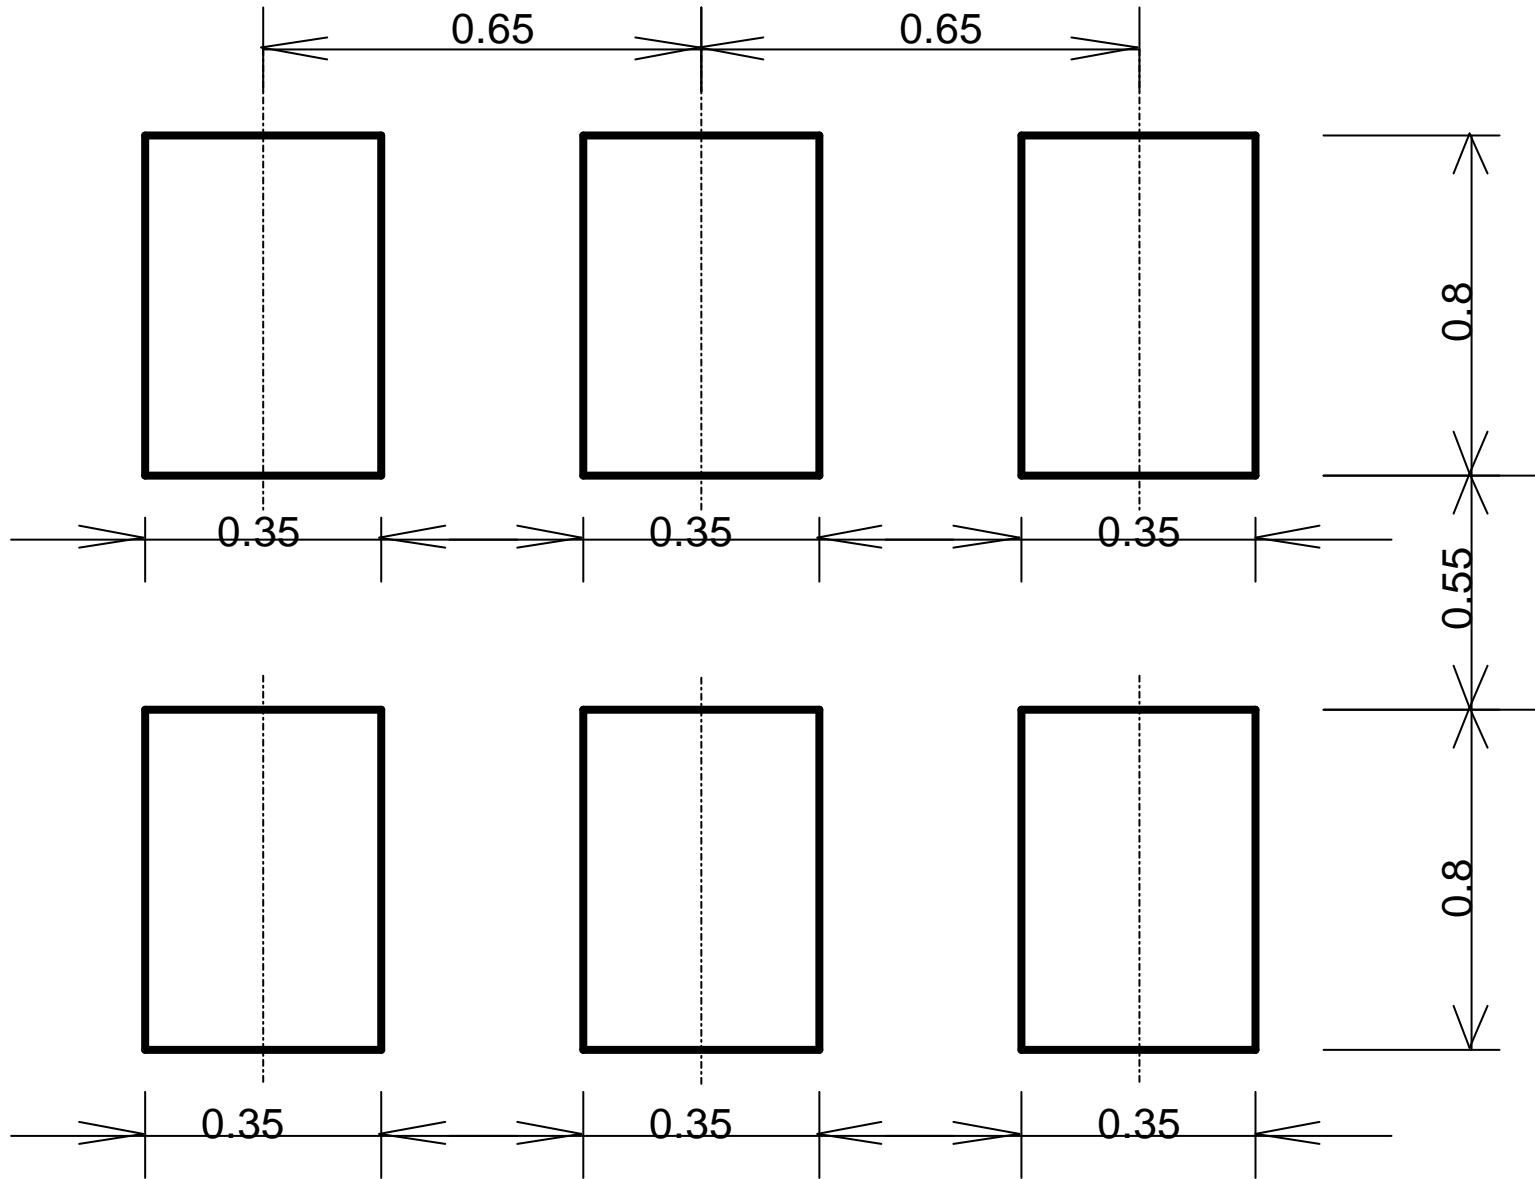


All the technical data and information contained herein are subject to change without notice.


**LC-FSLC-S090T-P-0409A**

# FSLC-S090T-P Sample Data


Return Loss [ dB ]  
Insertion Loss [ dB]

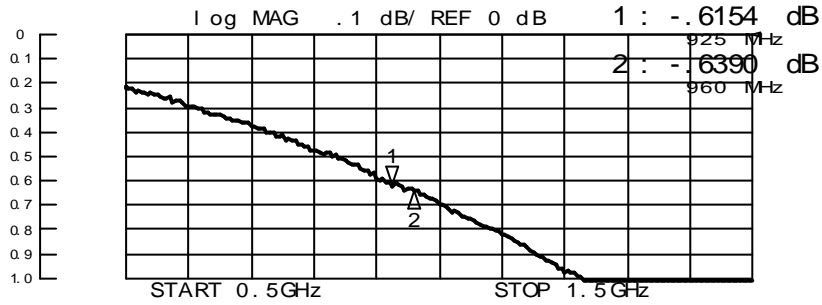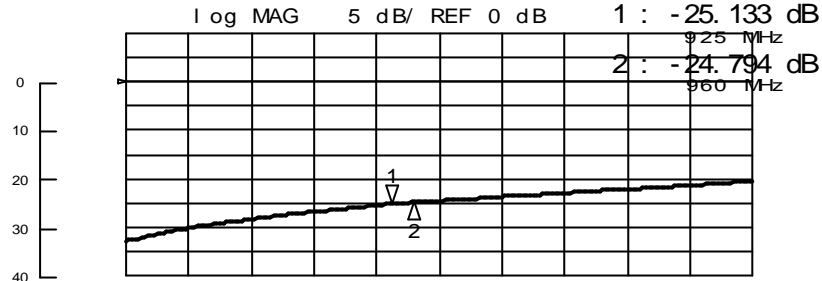


Isolation [ dB]

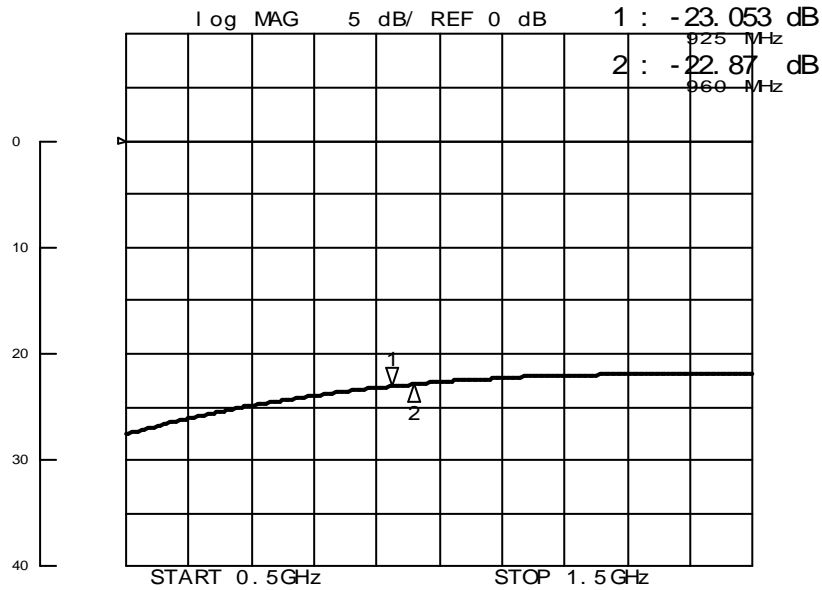

Coupling [ dB]

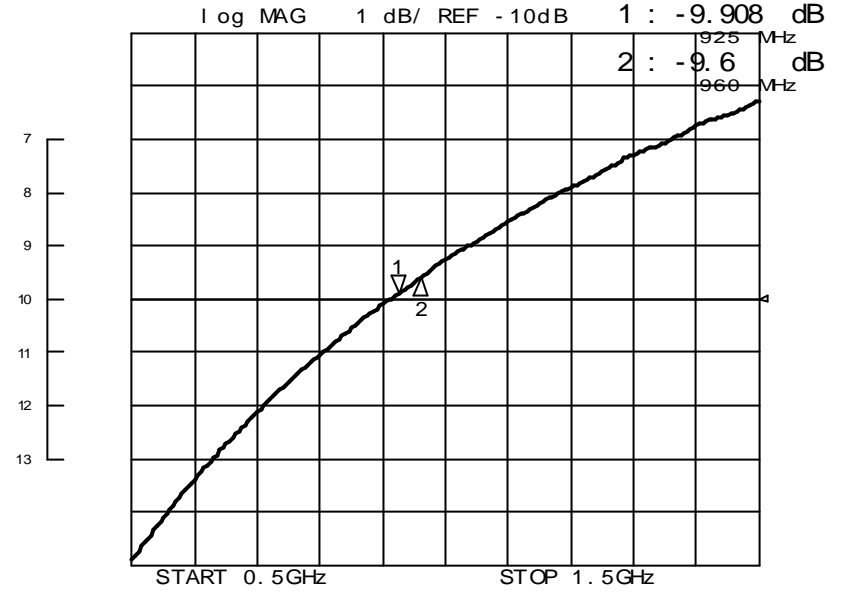

925/960 MHz Band  
Chip Multilayer Coupler FSLC-S090T-P

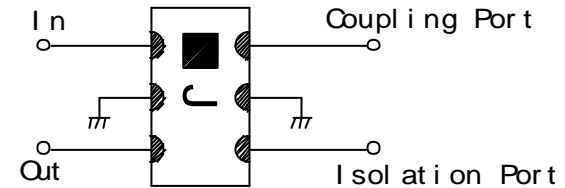

**LC-FSLC-S090T-P-0409A**