

□ MN101C73A , MN101C73D

Type	MN101C73A (under development)	MN101C73D (under planning)
ROM (×8-bit)	32 K	64 K
RAM (×8-bit)	1.5 K	2 K
Package	TQFP064-P-1010C *Lead-free, LQFP064-P-1414 *Lead-free (under planning)	
Minimum Instruction Execution Time	0.1 μs (at 3.0 V to 3.6 V, 10 MHz) 0.235 μs (at 1.8 V to 3.6 V, 4.25 MHz) 62.5 μs (at 1.8 V to 3.6 V, 32 kHz)	
	* The lower limit for operation guarantee for flash memory built-in type is 2.2 V.	
Interrupts	<ul style="list-style-type: none"> • RESET • Watchdog • External 0 • External 1 • External 2 • External 3 • External 4 • External 5 • External 6 (key interrupt dedicated) • Timer 0 • Timer 1 • Timer 2 • Timer 3 • Timer 6 • Time base • Timer 7 (2 systems) • Timer 8 (2 systems) • Serial 0 (2 systems) • Serial 1 (2 systems) • Serial 3 • A/D conversion finish 	
Timer Counter	<p>Timer counter 0 : 8-bit × 1 (square-wave/8-bit PWM output, event count, generation of remote control carrier, simple pulse width measurement, added pluse (2-bit) system PWM output) (square-wave/PWM output to large current terminal P50 possible)</p> <p>Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input</p> <p>Interrupt source coincidence with compare register 0</p> <p>Timer counter 1 : 8-bit × 1 (square-wave output, event count, synchronous output event)</p> <p>Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input; timer counter 8 output</p> <p>Interrupt source coincidence with compare register 1</p> <p>Timer counter 0, 1 can be cascade-connected.</p> <p>Timer counter 2 : 8-bit × 1 (square-wave output, added pluse (2-bit) system PWM output, PWM output, serial transfer clock output, event count, synchronous output event, simple pulse width measurement) (square-wave/PWM output to large current terminal P51 possible)</p> <p>Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input</p> <p>Interrupt source coincidence with compare register 2</p> <p>Timer counter 3 : 8-bit × 1 (square-wave output, event count, serial transfer clock)</p> <p>Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input</p> <p>Interrupt source coincidence with compare register 3</p> <p>Timer counter 2, 3 can be cascade-connected.</p> <p>Timer counter 6 : 8-bit freerun timer</p> <p>Clock source 1/1 of system clock frequency; 1/1, 1/128, 1/8192 of OSC oscillation clock frequency; 1/1, 1/128, 1/8192 of XI oscillation clock frequency</p> <p>Interrupt source coincidence with compare register 6</p>	

Timer Counter (Continue)	Timer counter 7 : 16-bit × 1	
	(square-wave output, 16-bit PWM output (cycle / duty continuous variable), event count, synchronous output event, pulse width measurement, input capture, real time output control, high performance IGBT output (Cycle/Duty can be changed constantly)) (square-wave/PWM output to large current terminal P52 possible)	
	Clock source	1/1, 1/2, 1/4, 1/16 of system clock frequency; 1/1, 1/2, 1/4, 1/16 of OSC oscillation clock frequency; 1/1, 1/2, 1/4, 1/16 of external clock input frequency
	Interrupt source	coincidence with compare register 7 (2 lines), input capture register
	Timer counter 8: 16 bit × 1	
	(square-wave/16-bit PWM output [duty continuous variable], event count, pulse width measurement, input capture) (square-wave/PWM output to large current terminal P53 possible)	
	Clock source	1/1, 1/2, 1/4, 1/16 of system clock frequency; 1/1, 1/2, 1/4, 1/16 of OSC oscillation clock frequency; 1/1, 1/2, 1/4, 1/16 of external clock input frequency
	Interrupt source	coincidence with compare register 8 (2 lines), input capture register
	Timer counters 7, 8 can be cascade-connected. (square-wave output, PWM is possible as a 32-bit timer.)	
	Time base timer (one-minute count setting)	
Clock source	1/1 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency	
Interrupt source	1/128, 1/256, 1/512, 1/1024, 1/4096, 1/8192, 1/16384, 1/32768, of clock source frequency	
Watchdog timer		
Interrupt source	1/65536, 1/262144, 1/1048576 of system clock frequency	
Serial Interface	Serial 0 : synchronous type/UART (full-duplex) × 1	
	Clock source	1/2, 1/4 of system clock frequency; pulse output of timer counter 1 or 2; 1/2, 1/4, 1/16, 1/64 of OSC oscillation clock frequency, external clock
	Serial 1 : synchronous type/UART (full-duplex) × 1	
	Clock source	1/2, 1/4 of system clock frequency; pulse output of timer counter 1 or 2; 1/2, 1/4, 1/16, 1/64 of OSC oscillation clock frequency, external clock
Serial 3 : synchronous type/single-master I ² C × 1		
Clock source	1/2, 1/4 of system clock frequency; pulse output of timer counter 2 or 3; 1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency, external clock	
I/O Pins	I/O	55 • Common use • Specified pull-up resistor available • Input/output selectable (bit unit)
A/D Inputs	10-bit × 12-ch. (with S/H)	
LCD	32 segments × 4 commons (static, 1/2, 1/3, or 1/4 duty) Usable if VLCD ≤ VDD LCD power shunt resistance contained	
Special Ports	Buzzer output, remote control carrier signal output, high-current drive port	
ROM Correction	Correcting address designation : up to 3 addresses possible	


See the next page for pin assignment and support tool.

Electrical Characteristics

Supply current

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDD1	$f_{osc} = 4 \text{ MHz}, V_{DD} = 3 \text{ V}$		1	1.8	mA
	IDD2	$f_x = 32 \text{ kHz}, V_{DD} = 3 \text{ V}$		4	15	μA
Supply current at HALT	IDD3	$f_x = 32 \text{ kHz}, V_{DD} = 3 \text{ V}, T_a = 25^\circ\text{C}$		2	5	μA
	IDD4	$f_x = 32 \text{ kHz}, V_{DD} = 3 \text{ V}, T_a = -40^\circ\text{C to } +85^\circ\text{C}$			10	μA
Supply current at STOP	IDD5	$V_{DD} = 3 \text{ V}, T_a = 25^\circ\text{C}$			2	μA
	IDD6	$V_{DD} = 3 \text{ V}, T_a = -40^\circ\text{C to } +85^\circ\text{C}$			8	μA

Pin Assignment

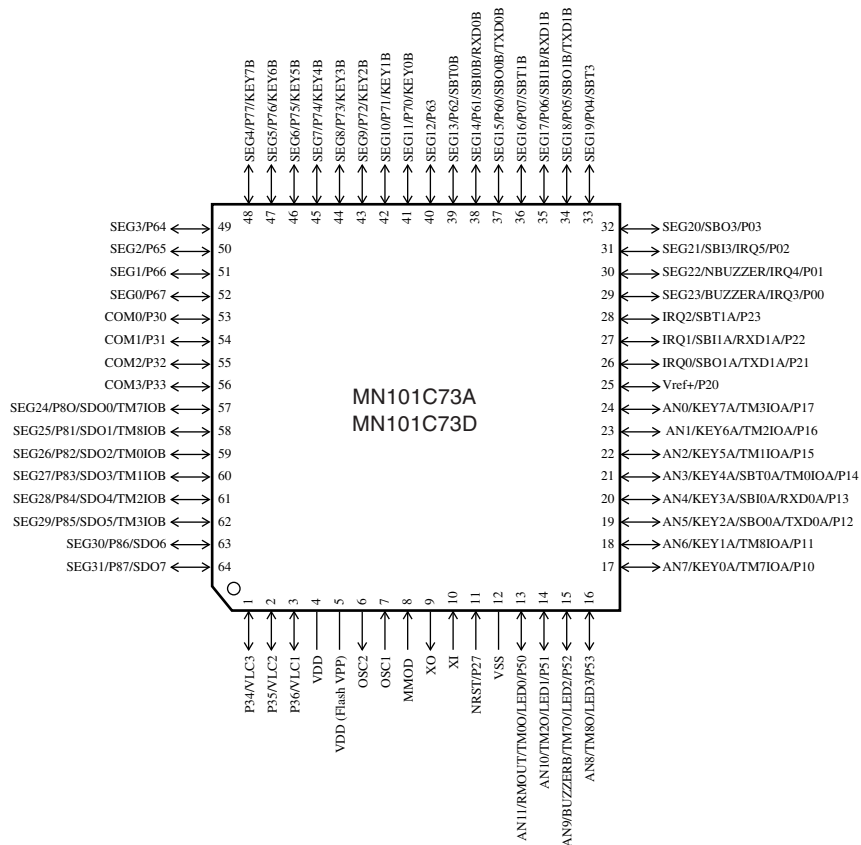

TQFP064-P-1010C *Lead-free

LQFP064-P-1414 *Lead-free (under planning)

Support Tool

■ In-circuit Emulator	PX-ICE101C / D + PX-PRB101C73-TQFP064-P-1010C-M (under development)	
	PX-ICE101C / D + PX-PRB101C73-LQFP064-P-1414-M (under development)	
■ Flash Memory Built-in Type	Type	MN101CF73A (under development), MN101CF73D (under planning)
	ROM (× 8-bit)	32 K, 64K
	RAM (× 8-bit)	2.0 K
	Minimum instruction execution time	0.1 μs (at 3.0 V to 3.6 V, 10 MHz)
		0.235 μs (at 2.2 V to 3.6 V, 4.25 MHz)
		62.5 μs (at 2.2 V to 3.6 V, 32 kHz)
Package	TQFP064-P-1010C *Lead-free, LQFP064-P-1414 *Lead-free (under planning)	

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technical information described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the technical information as described in this material.
- (4) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this material are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This material may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.