

# SHINDENGEN

## Power Switching Regulators


MA2000 Series

**MA2420**

### OUTLINE DIMENSIONS

Case : MA7

Unit : mm

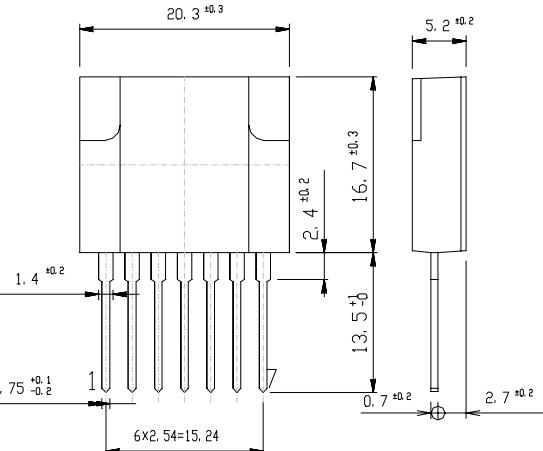

### RATINGS

#### ● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Storage Temperature	Tstg		-30~125	-30~125	°C
Operating Temperature	Top	Case Temperature	-20~125	-20~125	°C
Junction Temperature	Tj		150	150	°C
Peak Input Voltage	Vin	(②+,④-,Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I <sub>CEX</sub> )	500	500	V
Input Current	Iin	Pulse Pulse Width 150 μs MAX, Duty1/2, Sawtooth Wave, Peak Value, (②+,④-)	6	6	A
Maximum Operating Frequency	f(max)		200	200	kH <sub>Z</sub>
Maximum Power Dissipation	P <sub>D</sub>	Ta=25°C	3	3	W
	P <sub>D</sub>	Heatsink Tc=100°C	12	12	W
Dielectric Strength	Vdis	Terminals To Case AC 1 min	2	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	100	MΩ
Fold Back Control Voltage	V <sub>CONT(max)</sub>	Fold Control Resistance=0 Ω Duty 1/2, (④,⑦)	±8	±8	V
Fold Back Control Current	I <sub>CONT(max)</sub>	(④-,⑥+)	100	100	mA

#### ● Electrical Characteristics (Tc=25°C)

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Q1	Collector Cutoff Current	I <sub>CEX</sub> V <sub>CE</sub> =500V, Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I <sub>CEX</sub> , (②+,④-)	MAX 0.1	MAX 0.1	mA
	DC Current Gain	h <sub>FE</sub> V <sub>CE</sub> = 5V, I <sub>C</sub> = 1.5A, (②+,④-,⑤)I <sub>B</sub>	15~30	10~20	
	Collector to Emitter Saturation Voltage	V <sub>CE(sat)</sub> I <sub>C</sub> =1.5A, I <sub>B</sub> =0.3A, (②+,④-,⑤)I <sub>B</sub>	MAX 1.0	MAX 1.0	V
D1	Thermal Resistance	θ <sub>jc</sub> Junction to Case	MAX 4.17	MAX 4.17	°C/W
	Reverse Current	I <sub>R</sub> V <sub>R</sub> =450V, (①+,②-)	MAX 10	MAX 10	μA
	Forward Voltage	V <sub>F</sub> I <sub>F</sub> =0.6A, (①-,②+)	MAX 1.7	MAX 1.7	V
Driving Saturation Voltage	V <sub>D(sat)</sub>	I <sub>C</sub> =1.5A, I <sub>B</sub> =0.3A, (⑤) +, (④) -	MIN 1.7	MIN 1.7	
			MAX 2.3	MAX 2.3	V

● Standard Operating Condition•Design Standard For Application Circuit

Item	Conditions	Ratings		Unit
		P Class	N Class	
Input Rated Voltage	AC90~132	AC90~132		V
Output Nominal Wattage	24	24		W
Output Nominal Voltage	12	12		V
Output Nominal Current	2	2		A

● Standard Operating Condition•Standard Operating Characteristics ( $T_a=25^\circ C$ )

Item	Conditions	Ratings		Unit	
		P Class	N Class		
Minimum Input Full Load Output Voltage	$V_{in}=90V, I_O=2A$	$12.0 \pm 0.6$	$12.0 \pm 0.6$	V	Fig 2, ① Refer
Maximum Input Light Load Output Voltage	$V_{in}=132V, I_O=0.2A$	$12.0 \pm 0.6$	$12.0 \pm 0.6$	V	Fig 2, ② Refer
AC Input Voltage	$I_O=2A$	MAX 85	MAX 85	V	
Over Current Protection	Foldback Current	$I_O=2A$	$I_O=0.2A$	A	Fig 2, ③ Refer
	Short Circuit	$V_{in}=132V, R_O=0.5 \Omega$	Nodata To Any Device, Automatic Recovery.	-	Fig 2, ④ Refer
Output Ripple Noise	$V_{in}=90\sim 132V, I_O=0.2\sim 2A$	MAX 150	MAX 150	mV P-P	

Figure in ○=Terminal Sign

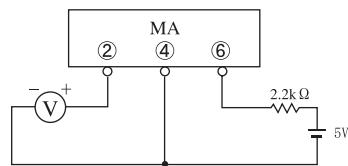


Fig1. Measurement Circuit


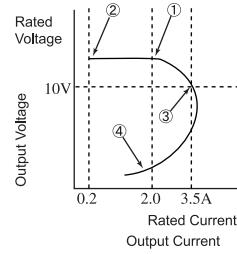



Fig2. Output Voltage/Current


## MA2420 Transient Thermal Impedance

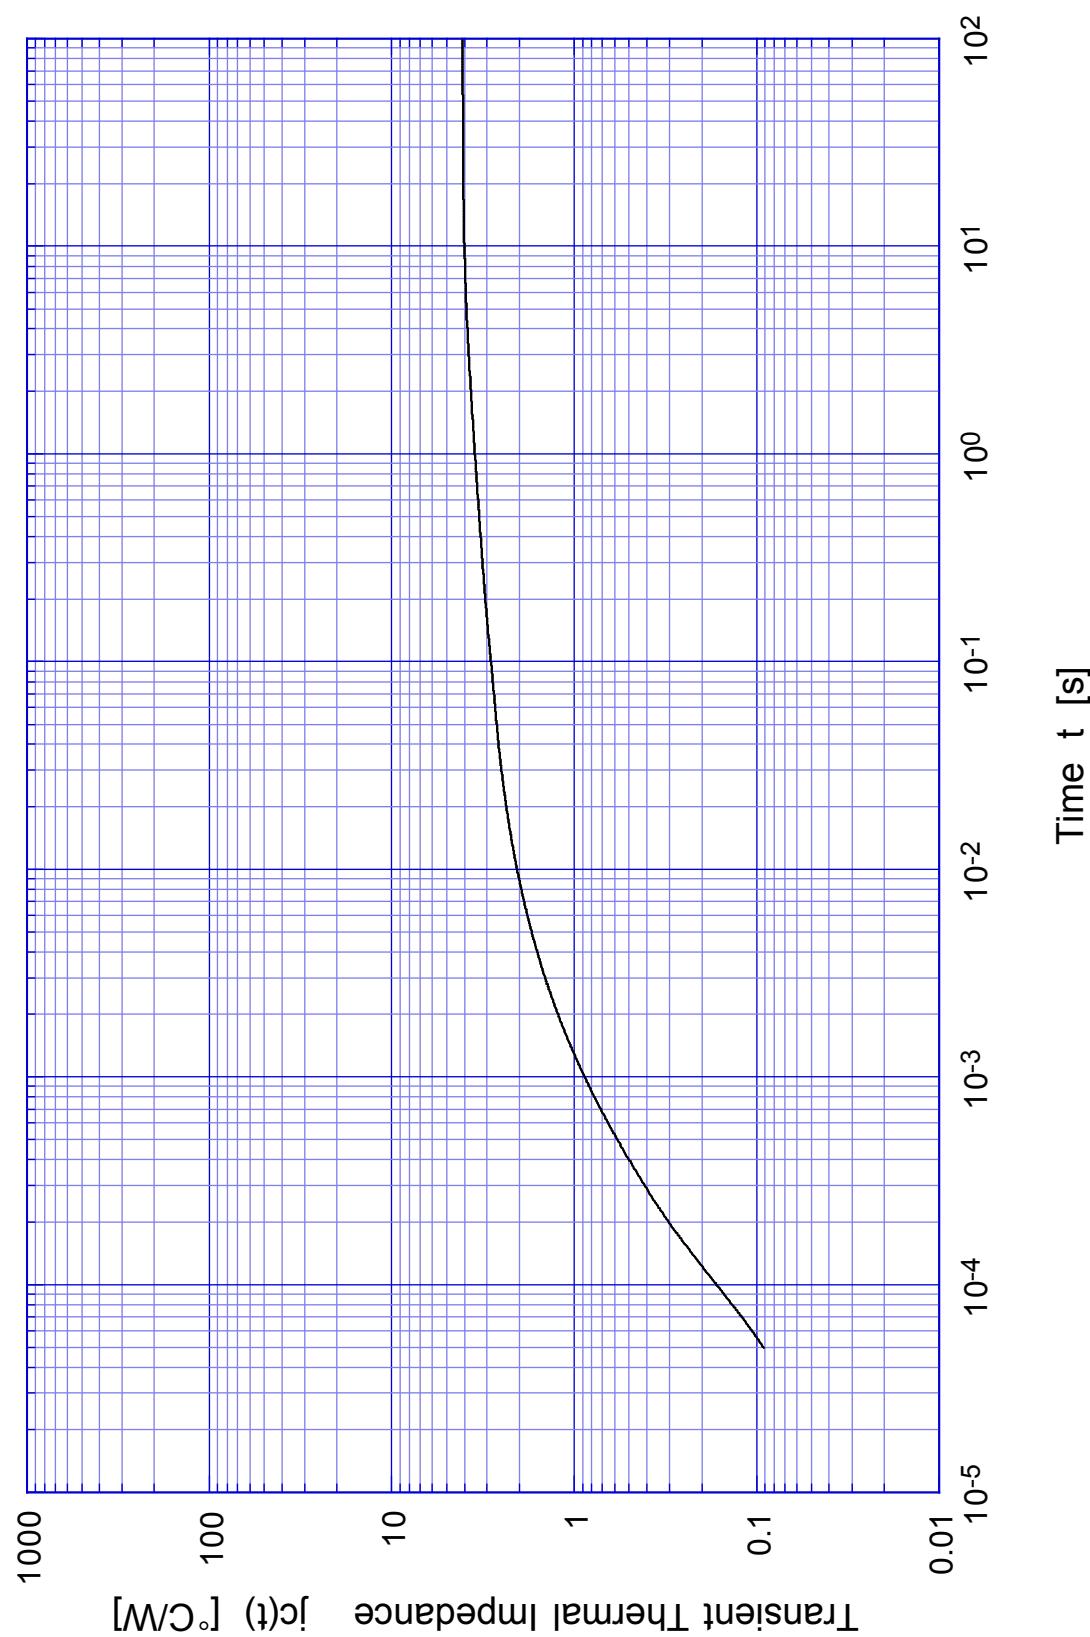

# MA2420

Forward Bias SOA

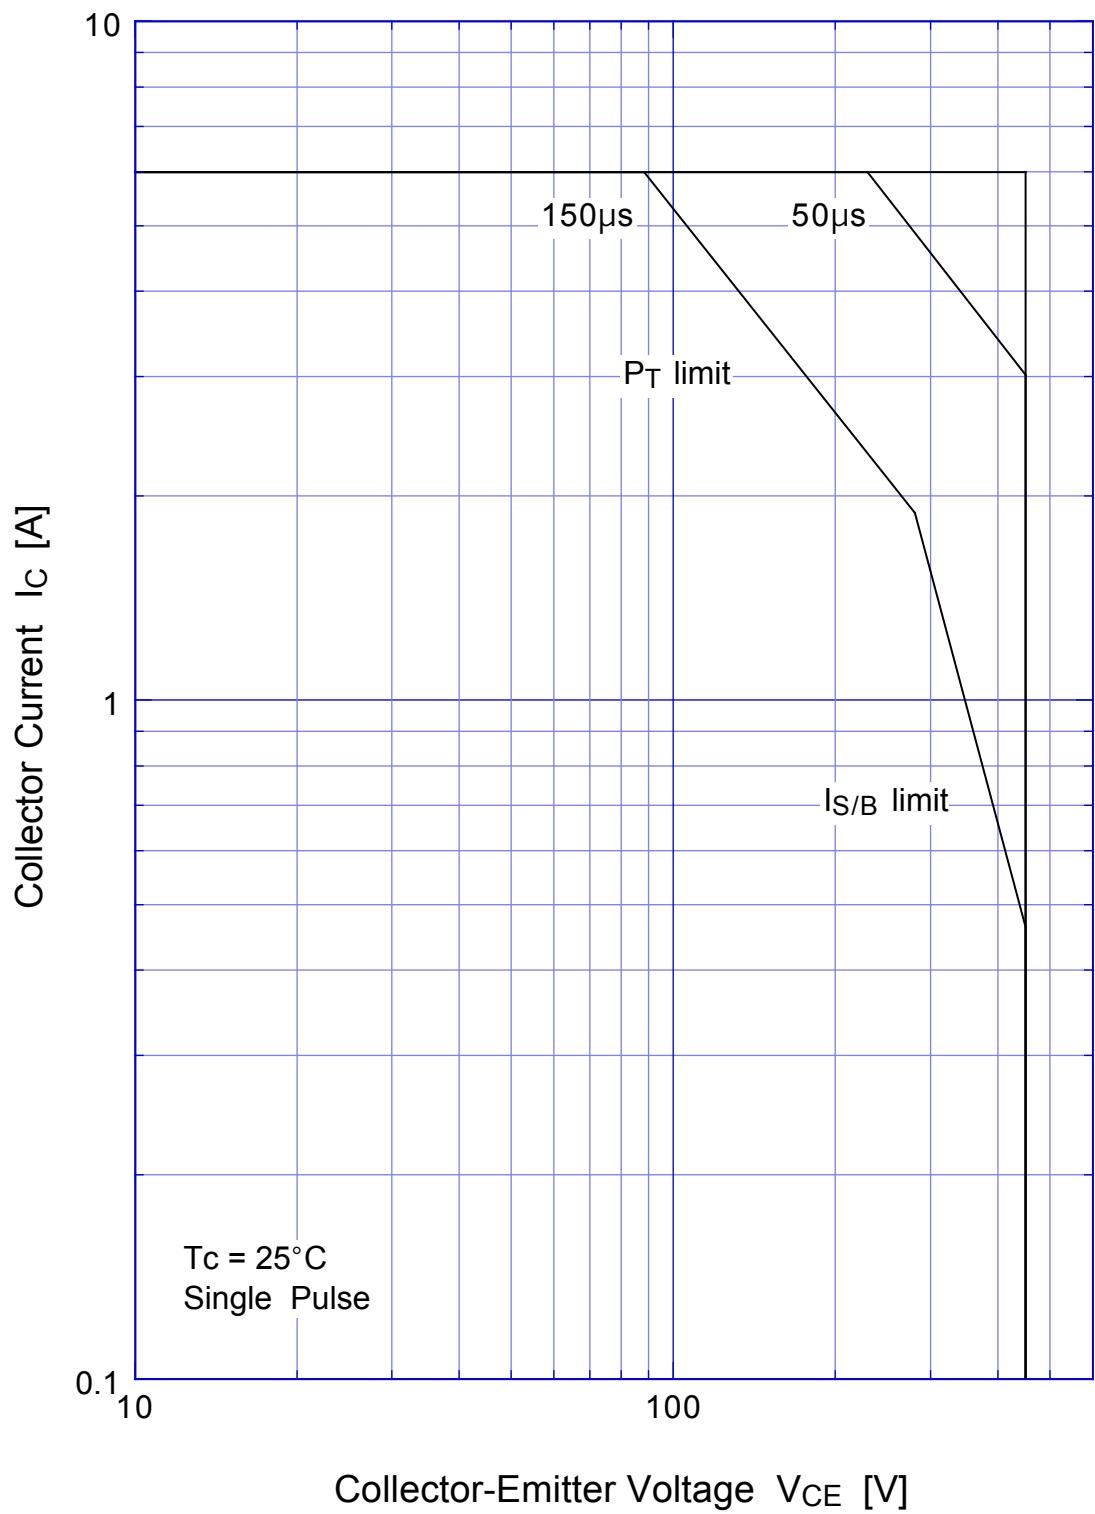

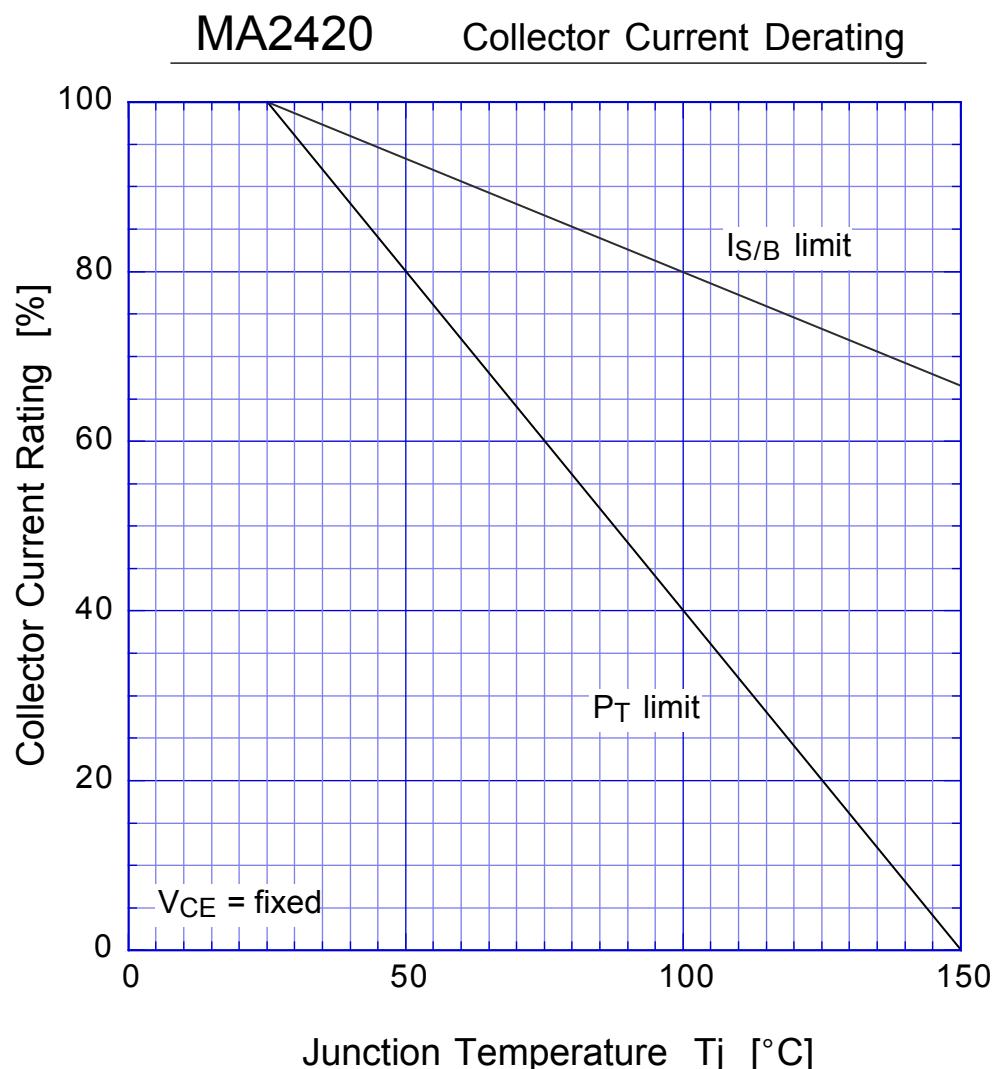

# MA2420

## Reverse Bias SOA

