

# E-Series I/Q Modulator 1805 - 1880 MHz

MAMDES0003




## Features

- High 3I and 5I Suppression
- Surface Mount



## SM-92 Package

Note: Non Hermetic Package

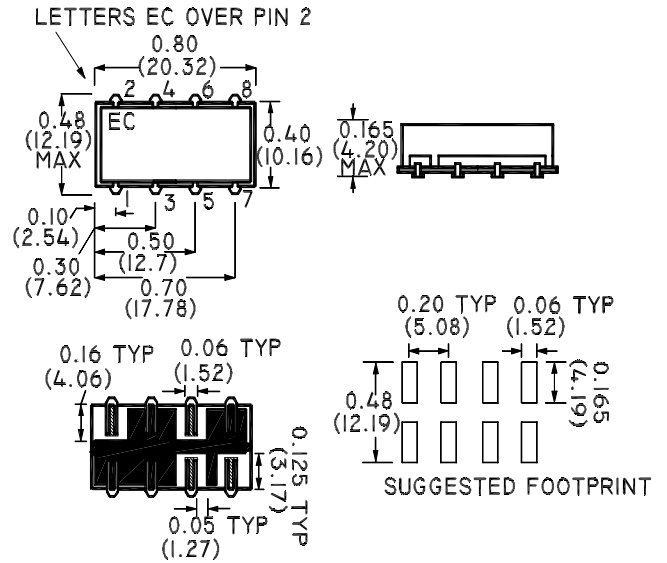

## Description

M/A-COM's MAMDES0003 is a discrete surface mount I/Q Modulator.

## Electrical Specifications @25°C

Parameter	Units	Typical	Minimum	Maximum
Frequency Range				
(LO) Carrier	MHz	—	—	—
I/Q	KHz	—	—	—
LO Carrier Suppression *	dBc	25	20	—
SSB Rejection *	dBc	23	18	—
Harmonic Suppression *				
3 x I/Q	dBc	45	35	—
5 x I/Q	dBc	55	45	—
Conversion Loss	dB	9.5	—	10.5
(LO) Carrier Power	dBm	+10 ± 1	—	—
I/Q Drive Level	dBm	-10.0	—	—
(LO) Port Return Loss	dBm	—	15	—

- Additional specifications: Tested under maximum adjustable rating DC offset = ±20mV, Q Power level: ±0.5dB

S 1552 B



M/A-COM ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel.+85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

www.macom.com

Specifications subject to change without notice.

**Operating Characteristics**

Impedance	50 Ohms Nominal
Parameter	Absolute Maximum
Operating Temperature	-10°C to +85°C
Storage Temperature	-55°C to +100°C
Pin Temperature (10 Sec)	260°C

**Functional Configuration**

Function	Pin No.
LO	1
RF	8
I	5
Q	6
External 50 Ohms	—
Case Ground	2,3,4,7
Not Connected	—