


## Double-Balanced Mixer

Rev. V2

### Features

- LO and RF: 300 to 2000 MHz
- IF: DC to 1000 MHz
- LO Drive +7 dBm (nominal)
- High Isolation 50 dB (Typ.)

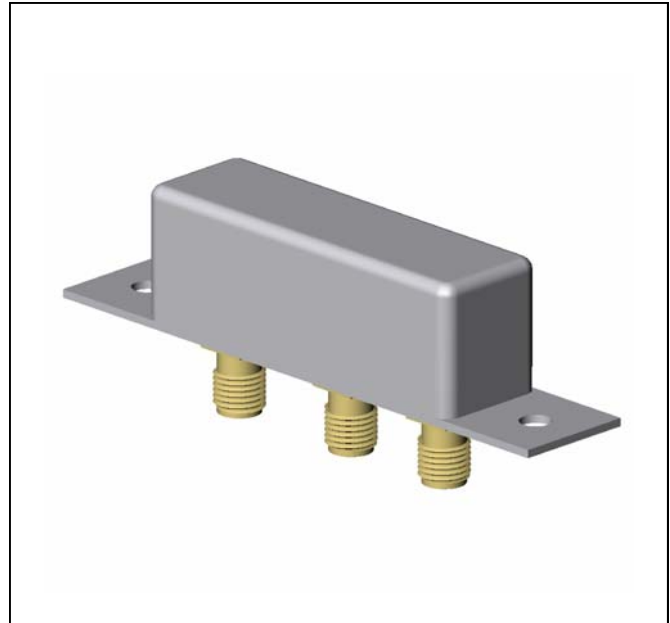

### Guaranteed Specifications<sup>1</sup>

Characteristics	Min	Typ.	Max.	Test Conditions
SSB Conversion Loss And SSB Noise Figure		6.0 dB 6.5 dB  8.0 dB  8.0 dB 9.5 dB	7.5 dB 8.0 dB  9.0 dB  9.0 dB 10.0 dB	fL & fR = 1000 to 1700 MHz fI = 10 to 500 MHz fI = 500 to 1000 MHz fL & fR = 600 to 2000 MHz fI = 10 to 1000 MHz fL & fR = 300 to 2000 MHz fI = 10 to 450 MHz fI = 450 to 1000 MHz
Isolation L at R L at I L at R L at I	40 dB 25 dB 30 dB 20 dB	45 dB 35 dB 40 dB 30 dB		fL 300 to 1000 MHz   fL 1000 to 2000 MHz
Conversion Compression		1.0 dB		fR level = 0 dBm
Desensitization		1.0 dB		fR2 level = -2 dBm

#### Notes:

1. Measure in a 50-Ohm system with nominal LO drive and downconverter application only, unless otherwise specified. The I-Port frequency range extends to DC for phase detection, pulse modulation, or attenuator applications, I-Port VSWR degrades from a 50-Ohm system at low IF frequencies.

### Absolute Maximum Ratings

Storage Temperature	-65°C to +100°C
Operating Temperature	-54°C to +100°C
Peak RF Input Power	+26 dBm at +25°C, derate to +17 dB, at +100°C
Peak Input Current at 25°C	50 mA DC

Weight 31 gram (1.1 oz) max.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## Double-Balanced Mixer

Rev. V2



### Typical Performance Curves at 25°C

#### Conversion Loss




**Conversion Loss vs. LO Drive Level:** The minimum recommended drive level is +5 dBm. A lower drive level will degrade the conversion loss and noise figure over the full temperature and frequency range. Operation at +5 dBm is recommended to reduce the level of the intermodulation products in the last two rows of the intermodulation chart. It will also minimize the output noise below 2 kHz.

The maximum recommended drive level is +13 dBm. A higher drive level will significantly increase the noise figure and also degrade isolation. Operation at +13 dBm is recommended to achieve best two-tone performance and suppression of the intermodulation products in the rows above the second row in the intermodulation chart.

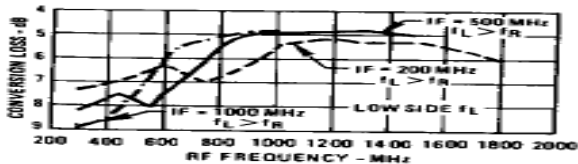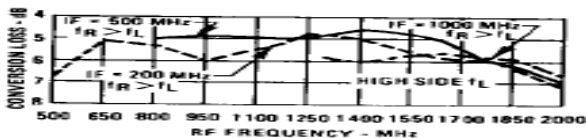


**Conversion Loss vs. Input Frequency:** Conversion loss of the mixer when used in an SSB system. The frequency ordinate refers to the R-port ( $f_R$ ) with  $f_I$  at 200, 500, and 1000 MHz. Data plotted with an  $f_L$  level of +7 dBm.

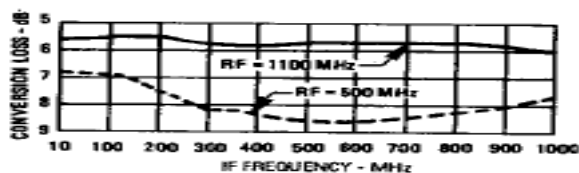

**Conversion Loss vs.  $f_I$  Frequency:** Conversion loss of the mixer when used in an SSB system. The frequency ordinate refers to the I-port when  $f_I$  is swept from 510 to 1500 MHz with  $f_R$  at 500 MHz and  $f_L$  swept from 1110 to 2100 MHz with  $f_R$  at 1100 MHz.

#### VSWR

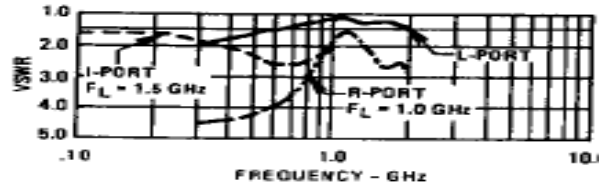


**VSWR vs. Frequency:** VSWR of the L-, I-, and R-ports in a 50-ohm system with  $f_L$  at +7 dBm. Some variation in the R-port VSWR will occur as a function of the L-port frequency.

#### Harmonic Intermodulation

5f <sub>R</sub>	>71	>71	>71	>71	>71	>71
4f <sub>R</sub>	>71	>71	>71	>71	>71	>71
3f <sub>R</sub>	>71	53	68	56	71	51
2f <sub>R</sub>	>71	63	67	61	>71	69
f <sub>R</sub>	61	50	65	50	67	68
	63	55	64	64	70	66
	28	0	40	12	41	26
	29	0	41	10	42	19
		7	43	29	54	30
		3	36	27	54	29
	0	f <sub>L</sub>	2f <sub>L</sub>	3f <sub>L</sub>	4f <sub>L</sub>	5f <sub>L</sub>

**Harmonic Intermodulation Products:** Intermodulation signals which result from the mixing of input signals are shown above. Mixing product suppression is indicated by the number of dB below the desired output level,  $f_R - f_L$ . Products are for the difference frequency  $nf_L - mf_R$  and  $mf_R - nf_L$ . The performance was measured with  $f_R$  at 300 MHz, -10 dBm, and  $f_L = 299$  MHz, +7 dBm for light area, +13 dBm for shaded area.

#### Isolation

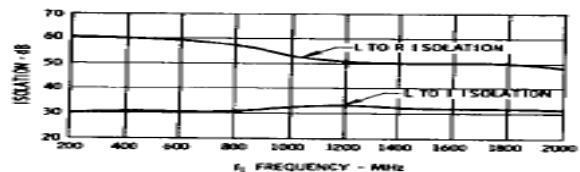

**Isolation vs. Frequency:** Level of the  $f_L$  signal fed through to the R- and I-ports with respect to the level of the  $f_L$  signal at the L-port.

### Outline Drawing: M1J

