

AN5437K


Color TV Deflection Signal Processing IC

Overview


The AN5437K is an integrated circuit designed for color TV deflection signal processing circuit. It can operate with 12V power supply and is suitable for various types of color TV sets.

Features

- Built-in high voltage protector circuit by hold-down (X-ray protection)
- Built-in high performance noise canceler circuit with Lock Out prevention.
- Built-in vertical and horizontal oscillator circuit which are highly stable operation against changes in supply voltage and temperature
- 12V supply voltage operation

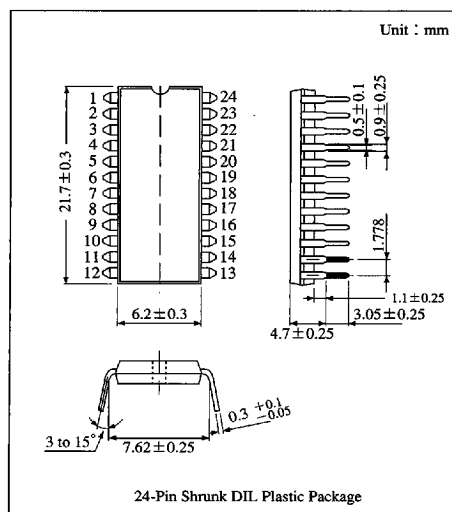

Block Diagram

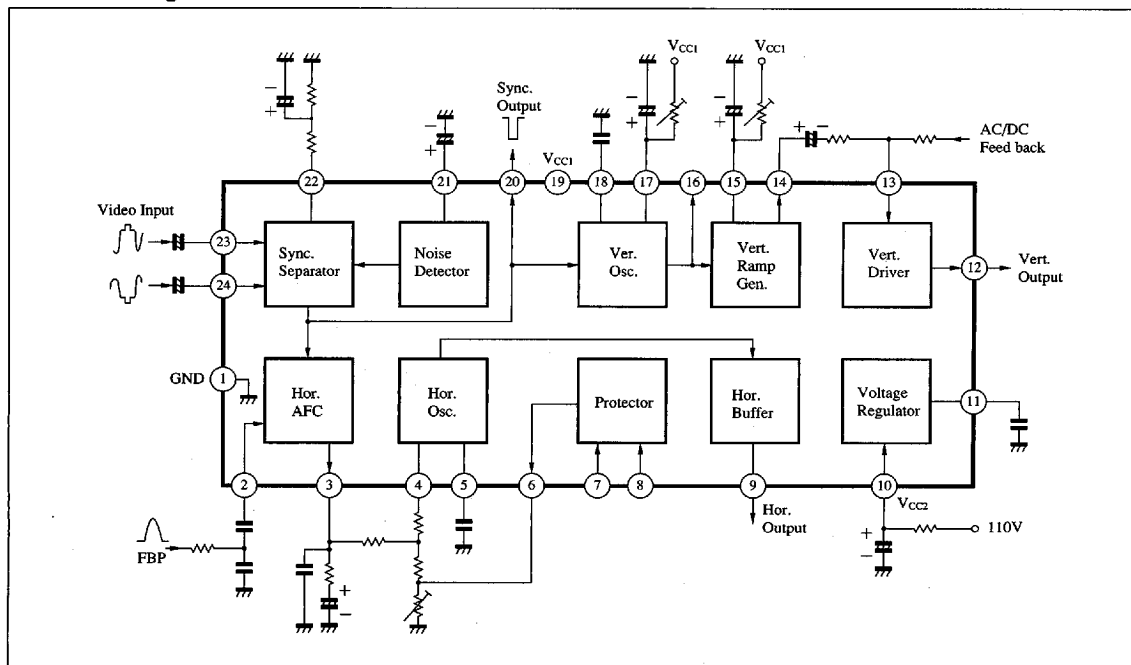

6932852 0014331 80T

Panasonic

■ Pin Descriptions

Pin No.	Pin name	Pin No.	Pin name
1	GND	13	Vert. saw-tooth input
2	Hor. AFC Ref. signal input	14	Vert. saw-tooth output
3	Hor. AFC output	15	Vert. saw-tooth capacitor
4	Hor. Hold volume	16	Vert. pulse output
5	Hor. Osc. capacitor	17	Vert. hold volume
6	X-Ray protector output	18	Vert. integral capacitor
7	X-Ray protector bias input	19	V _{CC1}
8	X-Ray protector input	20	Sync. sep. output
9	Hor. output	21	Noise detecting capacitor
10	V _{CC2}	22	Sync. sep. CR
11	Filter capacitor	23	Video signal input (1)
12	Vert. output	24	Video signal input (2)

■ Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Rating		Unit
Voltage	Supply voltage	V ₁₀₋₁	10.5		V
		V ₁₉₋₁	14.4		V
	Circuit voltage	V ₂₋₁	0	10	V
		V ₅₋₁	0	9	V
		V ₇₋₁	0	V ₁₀₋₁	V
		V ₈₋₁	0	8	V
		V ₁₂₋₁	0	V ₁₉₋₁	V
		V ₁₃₋₁	0	V ₁₉₋₁	V
		V ₁₆₋₁	0	10	V
		V ₁₇₋₁	0	V ₁₉₋₁	V
		V ₁₈₋₁	0	V ₁₉₋₁	V
		V ₂₃₋₁	0	10	V
		V ₂₄₋₁	0	V ₁₉₋₁	V
Current	Supply current	I ₁₀	16		mA
		I ₁₉	23		mA
	Circuit current	I ₃	-3	3	mA
		I ₄	-5	0	mA
		I ₅	-3	3	mA
		I ₆	0	5	mA
		I ₇	-5	5	mA
		I ₈	0	5	mA
		I ₉	-30	0	mA
		I ₁₂	-15	0	mA
		I ₁₃	-1	0	mA
		I ₁₄	-2	2	mA
		I ₁₅	-1	150	mA
		I ₁₆	-2	5	mA
		I ₁₇	0	40	mA
		I ₂₀	-1	1	mA
		I ₂₁	-1	1	mA
		I ₂₂	-1	0	mA

ICs for TV

■ Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Circuit current	I_{10}	Apply 12V with 200 Ω to Pin⑩	7.5	12.0	15.5	mA
	I_{19}	$V_{19-1}=12V$	8.0	14.0	20.0	mA
Terminal current	V_{10-1}	Apply 12V with 200 Ω to Pin⑩	9.0	9.6	10.2	V
Protector input voltage	V_{8-1}		6.8	—	9.0	V
Vertical oscillation starting voltage	$V_{OSC-S(V)}$ $V_{f_{VO,S}}$	V_{CC1} when f_{VO} is 40 to 60Hz and output becomes 0.7 V_{P-P} or more	—	3.9	6.2	V
Vertical oscillation frequency	f_{VO}	$V_{CC1}=12V$	53	55	58	Hz
Vertical oscillation pulse width	τ_{VO}	$f_{VO}=55Hz$ $V_{CC1}=12V$	390	600	820	μs
Vertical oscillation frequency change with supply voltage	$ \Delta f_{VO} /V_{CC}$	Oscillation frequency difference when $V_{CC1}=14.4V$ and 9.6V	0	0.93	1.3	Hz
Vertical pull-in range	f_{PV}	Video input 1.4 V_{P-P} $V_{CC1}=12V$	—	40	50	Hz
Vertical oscillation saw-tooth wave amplification	$v_{(saw)}$	Video input 1.4 V_{P-P} $V_{CC1}=12V$	1.8	2.0	2.2	V_{P-P}
Horizontal oscillation starting voltage	$V_{OSC-S(H)}$	Pin⑩ when f_{HO} is 10 to 20kHz and output becomes 1 V_{P-P} or more	—	5.2	6	V
Horizontal oscillation frequency	f_{HO}	$V_{CC2}=12V$	15.0	15.75	16.25	kHz
Horizontal oscillation pulse width	τ_{HO}	Oscillation pulse width ratio when $f_{HO}=15.75kHz$ $V_{CC2}=12V$	31.5	35.4	38.9	%
Horizontal oscillation frequency change with supply voltage	$ \Delta f_{HO} /V_{CC}$	Oscillation frequency difference when $V_{CC2}=14.4V$ and 9.6V	0	71	200	Hz
Protector operating horizontal oscillation frequency	f_{HHS}	When the protector circuit operates	17.0	18.0	20.0	kHz
Horizontal oscillation control sensitivity	β	Change rate of oscillation frequency at the flow-in/out of $I_o=100\mu A$	18	20	22	Hz/ μA
Separable sync input *	$V_{in(min)}$	Min. amplification of separable sync input signal	—	—	1.0	V_{P-P}
Horizontal pull-in range *	f_{HP}	$f_{HO}=15.7kHz$	—	± 600	—	Hz
f_{HO} change with ambient temperature *	$ \Delta f_{HO} /Ta$	$Ta=-20^{\circ}C$ to $+70^{\circ}C$	-1.67	—	1.67	Hz/ $^{\circ}C$
Dc loop gain *	f_{CD}	$\mu \times \beta$	3.5	5.5	7.5	kHz/rad
Temperature change of vertical oscillation frequency *	$ \Delta f_{VO} /Ta$	$Ta=-20^{\circ}C$ to $+70^{\circ}C$	—	0.3	—	Hz
Temperature change of vertical saw-tooth wave amplification *	$ V_{saw} /Ta$	$Ta=-20^{\circ}C$ to $+70^{\circ}C$	—	—	30	m V_{P-P}

* Reference value for design.

6932852 0014333 682

Panasonic

Pin^{②4} is used when Video input signal is positive polarity ()

Ⓣ : Tantalum Capacitor

6932852 0014334 519

Panasonic