





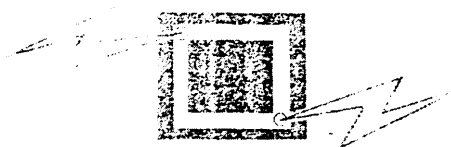

653-925 .




Product Information

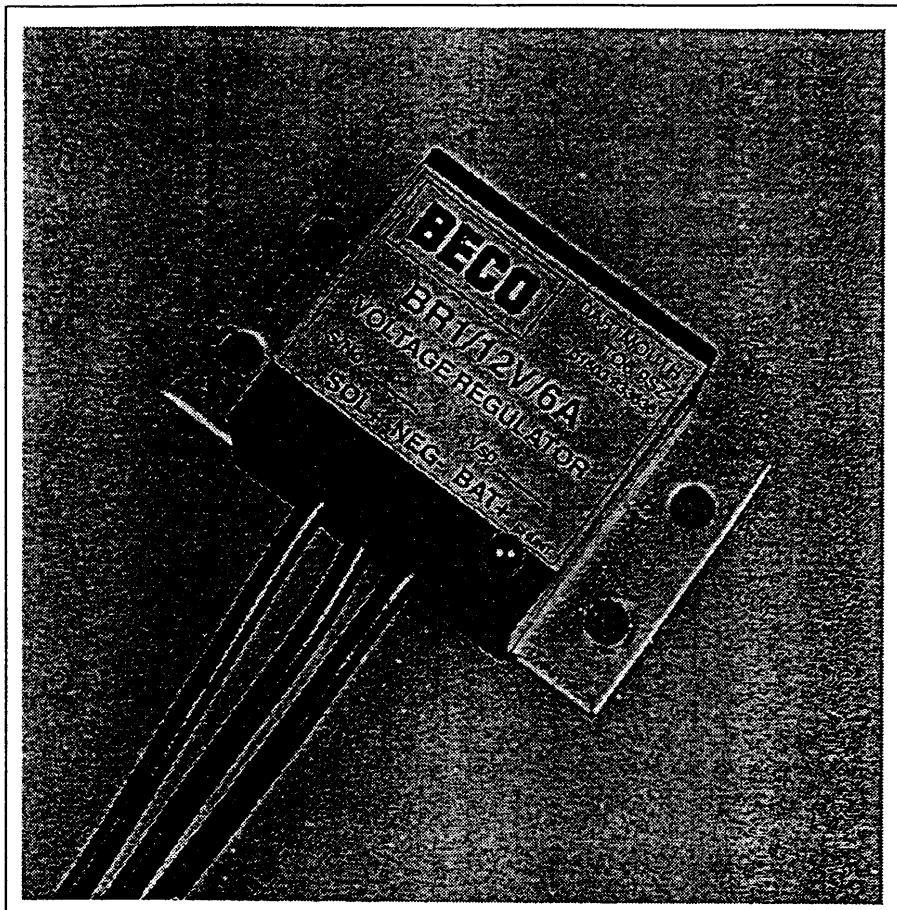

Solar Shunt Regulators

BR1/6/6 & BR1/12/6

- Low power consumption
- Fully encapsulated
- Stainless steel heatsink / mounting plate
- Rated to 6A
- 6V & 12V versions
- Temperature compensated
- Status indication (*shunt*)
- Solid state
- Small & simple to fit
- Low cost
- Safely paralleled
- Blocking diode included



Functional Description

The BR1 (6V & 12V versions) is a shunt regulator designed to limit the maximum voltage to which a lead acid battery can be driven when on charge from a photovoltaic (solar) module or array. It is a simple, low cost, solid state device for use with photovoltaic modules having a peak current not exceeding 6A. The unit has very low power consumption and features a single green, status indicating LED, which is illuminated when the battery voltage has reached the set-point and the module output is being shunted.

The circuit for the regulator (shown in the diagram opposite) comprise three main elements, a voltage comparator, a semiconductor switch and a blocking diode. The purpose of these elements is as follows:

Voltage Comparator


The battery voltage is constantly compared with an internal reference level and when it reaches the set-point the semiconductor switch is triggered. The reference set-point voltage is automatically adjusted upwards at lower temperatures and downwards at higher ones.

Semiconductor Switch

When triggered the switch shunts the solar module/array, diverting its output away from the battery. When the battery voltage has decayed by 1.5V the module/array output is reconnected to the battery.


Blocking Diode

This is an electronic non-return valve and serves two purposes. Firstly it ensures the battery cannot discharge through the module/array at night and secondly that the battery is not shorted when the regulator shunts the module/array.

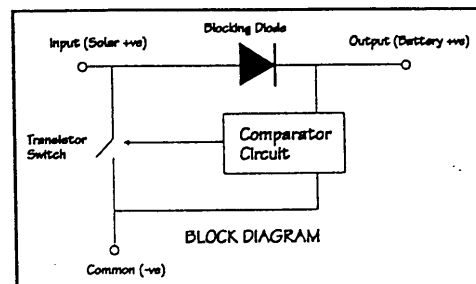

Detailed Description

- 1) The regulator's PCB is encapsulated in polyurethane within a black ABS box measuring 40(L) x 40 (W) x 20 (H). This assembly is fastened to a 2mm thick stainless steel heatsink measuring 65 (L) x 37 (W).
- 2) The heat sink also enables the unit to be easily mounted via four 4.5mm DIA holes.
- 3) The unit is rated at 6A and will easily handle the output from one MSX-83 module.
- 4) The shunt set-point is fixed at 7.3V (*nominal 6V*) with reconnection at 6.5V or 14.6V (*nominal 12V*) with reconnection at 13.0V. Batches of 10 or more units may be set to customer requirements during manufacture. (Please state requirements when ordering).
- 5) The ends of the three 220mm leads (SOLAR + BATTERY + and COMMON NEGATIVE) are terminated with M4 spade terminals for ease of connection.

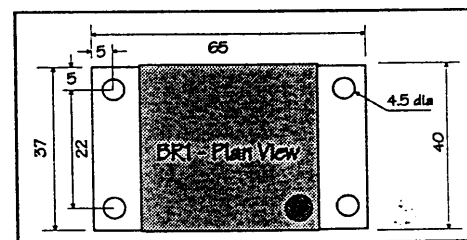

Dimensions (mm)	65(L) x 40(W) x 22(H)
Weight (g)	95
Lead Length (mm) / CSA (mm ²)	220
Colour Code - SOLAR +ve	RED
COMMON -ve	BLACK
BATTERY +ve	YELLOW
Nominal Voltage (V)	6.0 or 12.0
Shunt Set-Point (V) *	7.3 or 14.6
Reconnect Voltage (V)	6.5 or 13.0
Diode Voltage Drop (V)	0.4
Temperature Coeff. of Voltage (mV/°C)	20
Input Current (max) (A)	6
Typical Consumption (mA)	<1

* The set-point may be adjusted during manufacture to suit customer requirements - MOQ 10 off



BECO BATTERIES LTD

9 & 10 Speedwell Units, Nelson Road Industrial Estate, Dartmouth, Devon TQ6 9SZ. United Kingdom.
Telephone: +44 (0) 1803 833636 Fax: +44 (0) 1803 835379



Cert. No: 5183