

# LINEAR INTEGRATED CIRCUITS

## GENERAL PURPOSE TRANSISTOR ARRAY

The TBA 331 is an array of 5 monolithic NPN transistors in a 14-lead dual in-line plastic package. Two transistors are internally connected to form a differential amplifier. The transistors of the TBA 331 are well suited to low noise general purpose and to a wide variety of applications in low power systems in the DC through VHF range. They may be used as discrete components in conventional circuits; in addition, they provide the very significant inherent integrated circuit advantages of close electrical and thermal matching.

## ABSOLUTE MAXIMUM RATINGS


		Each transistor	Total package
$V_{CBO}$	Collector-base voltage ( $I_E = 0$ )	20	- V
$V_{CEO}$	Collector-emitter voltage ( $I_B = 0$ )	15	- V
$V_{CSS}$ *	Collector-substrate voltage	20	- V
$V_{EBO}$	Emitter-base voltage ( $I_C = 0$ )	5	- V
$I_C$	Collector current	50	- mA
$P_{tot}$	Total power dissipation at $T_{amb} \leq 55^\circ C$	300	750 mW
$T_{stg}, T_j$	Storage and junction temperature	-40 to 150	$^\circ C$
$T_{op}$	Operating temperature	0 to 85	$^\circ C$


\* The collector of each transistor of the TBA 331 is isolated from the substrate by an integrated diode. The substrate (pin 13) must be connected to the most negative point in the external circuit to maintain isolation between transistors and to provide for normal transistor action.

ORDERING NUMBER: TBA 331


## MECHANICAL DATA

Dimensions in mm

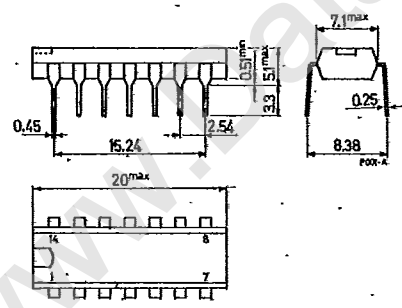

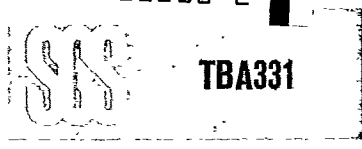

**SCHEMATIC DIAGRAM**

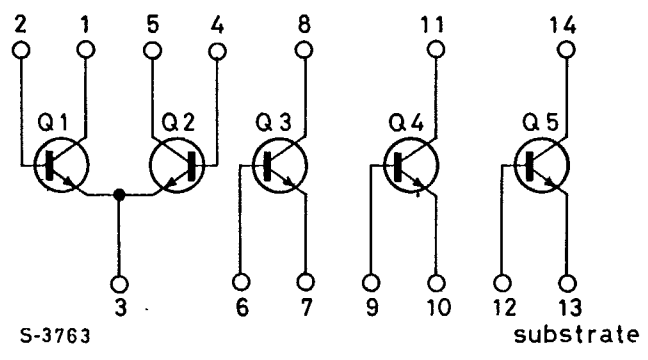

**THERMAL DATA**

		each	Total
$R_{th J-amb}$	Thermal resistance junction-ambient	max	315° C/W
			126° C/W

**ELECTRICAL CHARACTERISTICS** ( $T_{amb} = 25^{\circ}C$  unless otherwise specified)

Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_{CBO}$ Collector cutoff current ( $I_E = 0$ )	$V_{CB} = 10 V$		0.002	40	nA
$I_{CEO}$ Collector cutoff current ( $I_B = 0$ )	$V_{CE} = 10 V$		see curve	0.5	$\mu A$
$ I_{B1} - I_{B2} $ Input offset current	$I_C = 1 mA$ $V_{CE} = 3 V$		0.3	2	$\mu A$



TBA331


## ELECTRICAL CHARACTERISTICS (continued)

Parameter	Test conditions	Min.	Typ.	Max.	Unit	
$V_{CBO}$	Collector-base voltage ( $I_E = 0$ )		20	60	V	
$V_{CEO}$	Collector-emitter voltage ( $I_E = 0$ )		15	24	V	
$V_{CSS}$	collector-substrate voltage ( $I_{CSS} = 0$ )		20	60	V	
$V_{CE(sat)}$	Collector-emitter saturation voltage			0.23	V	
$V_{EBO}$	Emitter-base voltage ( $I_C = 0$ )		5	7	V	
$V_{BE}$	Base-emitter voltage			0.715	V	
				0.8	V	
$ V_{BE1} - V_{BE2} $	Input offset voltage			0.45	5	mV
$ V_{BE3} - V_{BE4} $	Input offset voltage			0.45	5	mV
$ V_{BE4} - V_{BE5} $	Input offset voltage			0.45	5	mV
$ V_{BE5} - V_{BE4} $	Input offset voltage			0.45	5	mV
$\frac{\Delta V_{BE}}{\Delta T}$	Base-emitter voltage temperature coefficient			-1.9		mV/°C
$\frac{ V_{BE1} - V_{BE2} }{\Delta T}$	Input offset voltage temperature coefficient			1.1		$\mu V/^\circ C$



## ELECTRICAL CHARACTERISTICS (continued)

Parameter	Test conditions	Min.	Typ.	Max.	Unit.
$h_{FE}$ DC current gain	$I_C = 10 \text{ mA}$ $V_{CE} = 3 \text{ V}$		100		—
	$I_C = 1 \text{ mA}$ $V_{CE} = 3 \text{ V}$	40	100		—
	$I_C = 10 \mu\text{A}$ $V_{CE} = 3 \text{ V}$		54		—
$f_T$ Transition frequency	$I_C = 3 \text{ mA}$ $V_{CE} = 3 \text{ V}$	300	550		MHz
NF Noise figure	$I_C = 100 \mu\text{A}$ $V_{CE} = 3 \text{ V}$ $f = 1 \text{ KHz}$ $R_g = 1 \text{ k}\Omega$		3.25		dB
$H_{ie}$ Input impedance	$I_C = 1 \text{ mA}$ $V_{CE} = 3 \text{ V}$ $f = 1 \text{ kHz}$		3.5		$\text{k}\Omega$
$h_{fe}$ Forward current transfer ratio	$I_C = 1 \text{ mA}$ $V_{CE} = 3 \text{ V}$ $f = 1 \text{ kHz}$		110		—
$h_{re}$ Reverse voltage transfer ratio	$I_C = 1 \text{ mA}$ $V_{CE} = 3 \text{ V}$ $f = 1 \text{ kHz}$		$1.8 \times 10^{-4}$		—
$h_{oe}$ Output admittance	$I_C = 1 \text{ mA}$ $V_{CE} = 3 \text{ V}$ $f = 1 \text{ kHz}$		15.6		$\mu\text{S}$
$Y_{ie}$ Input admittance	$I_C = 1 \text{ mA}$ $V_{CE} = 3 \text{ V}$ $f = 1 \text{ MHz}$		$0.3 + j0.04$		mS
$Y_{fe}$ Forward transadmittance	$I_C = 1 \text{ mA}$ $V_{CE} = 3 \text{ V}$ $f = 1 \text{ MHz}$		$31 - j1.5$		mS
$Y_{re}$ Reverse transadmittance	$I_C = 1 \text{ mA}$ $V_{CE} = 3 \text{ V}$ $f = 1 \text{ MHz}$		see curve		mS



**ELECTRICAL CHARACTERISTICS** (continued)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit.
$V_{ce}$ Output admittance	$I_C = 1 \text{ mA}$ $V_{CE} = 3 \text{ V}$ $f = 1 \text{ MHz}$		0.001+j0.03		mS
$C_{EBO}$ Emitter-base capacitance	$I_C = 0$ $V_{EB} = 3 \text{ V}$		0.6		pF
$C_{CBo}$ Collector-base capacitance	$I_E = 0$ $V_{CB} = 3 \text{ V}$		0.58		pF
$C_{CSS}$ Collector-substrate capacitance	$I_C = 0$ $V_{CSS} = 3 \text{ V}$		2.8		pF

Fig. 1 - Collector cutoff current vs ambient temperature




Fig. 2 - DC current gain vs. emitter current.




Fig. 3 - Input voltage and input offset voltage vs. emitter current




Fig. 4 - Input characteristic for each transistor




Fig. 5 - Input offset voltage vs. ambient temperature




Fig. 6 - Input offset current for matched transistor pair

