


VICOR

CONFIDENTIAL

	REV.	DESCRIPTION		DATE	APPROVED	
l	#1	RELEASED FOR DEVELOPMENT	DPK	2/27/97	SWN	
	#2	M3X.5 WAS #4-40	DPK	3/3/97	SWN	
l	#3	REVISED DRAWING	JMR	3/6/97 SWN		
1	#4	#4-40 TAP WAS M3X.5	DPK	4/28/97	SWN	
l	#5	REVISED PROFILE AND NO. OF FINS	DPK	11/19/97	SWN	
1	#6	ADDED ±.010 TO TO DIM	DPK	OPK 12/8/97 :		
I	#7	.49 WAS .490: REMOVED P/N STAMPING	DPK	8/24/98	SWN	
	#8	2.22 WAS 2.220	DPK	9/2/98	SWN	
1	#9	.40 WAS .400: ADDED *()* TO .100 & .190	DPK	9/2/98	SWN	
	#A	ADDED NOTE 4, CRITICAL CHA. "O"	AK	10/6/99	SWN	

†€<u>:</u>=-

--| (.410) |---|

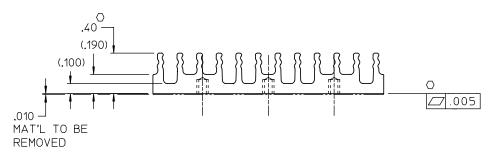

NOTES

- 1. MAKE FROM VICOR EXTRUSION P/N 16296.
- 2. REMOVE ALL BURRS AND SHARP EDGES.
- 3. FINISH. CLEAR CHROMATE.
- 4. "O" DENOTES CRITICAL CHARACTERISTICS FOR LOT INSPECTION.

DRAWN BY DATE			A		1/1/)		
D.P. KELLY	VICUR							
UNLESS OTHERWISE DIMENSIONS ARE IN	Y I Pro-							
TOLERANCES ARE: FRACTIONS DECIMAL ±1/64 XX= ± (XXX=± (HTSNK, "B" X-FLOW, .4H LOW FLOW, THREADED							
THIRD ANGLE PR	OJECTION	SIZE	FSCM NO.		DWG NO			REV
⊕∈		C	6713	1	1	6297		# A
DO NOT SCALE D	RAWING	SCALE	2=1			SHEET 1	OF	1