
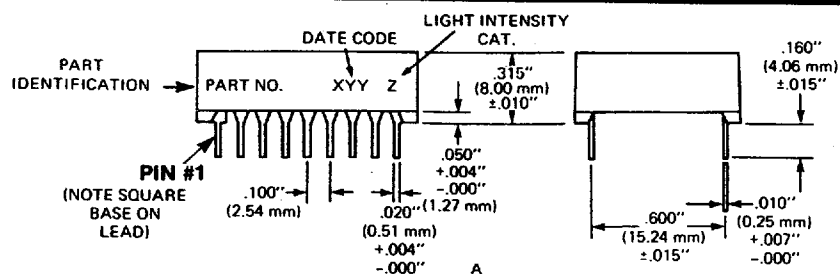


Displays

T-41-33




PACKAGE	DEVICE NO.	COLOR	DESCRIPTION	BRIGHTNESS OR LUMINOUS INTENSITY (PER SEG. MIN.)	PKG. KEY SEE PG. NO.
	MAN6160	High Eff. Red	0.56-Inch; Common Anode; RHDP	200 μ cd @ 2 mA	9 - A
	MAN6180		0.56-Inch; Common Cathode; RHDP		
	MAN6460	High Eff. Green	0.56-Inch; Common Anode; RHDP	510 μ cd @ 10 mA	
	MAN6480		0.56-Inch; Common Cathode; RHDP		
	MAN6660	Orange	0.56-Inch; Common Anode; RHDP		
	MAN6680		0.56-Inch; Common Cathode; RHDP		
	MAN6760	Red	0.56-Inch; Common Anode; RHDP	125 μ cd @ 10 mA	
	MAN6780		0.56-Inch; Common Cathode; RHDP		
	MAN6860	Yellow	0.56-Inch; Common Anode; RHDP	510 μ cd @ 10 mA	
	MAN6880		0.56-Inch; Common Cathode; RHDP		
	MAN6960	High Eff. Red	0.56-Inch; Common Anode; RHDP	320 μ cd @ 10 mA	
	MAN6980		0.56-Inch; Common Cathode; RHDP		
	MAN6110	High Eff. Red	0.56-Inch; Common Anode; RHDP; 2-Digit	200 μ cd @ 2 mA	8 - B
	MAN6140		0.56-Inch; Common Cathode; RHDP; 2-Digit		
	MAN6410	High Eff. Green	0.56-Inch; Common Anode; RHDP; 2-Digit	510 μ cd @ 10 mA	
	MAN6440		0.56-Inch; Common Cathode; RHDP; 2-Digit		
	MAN6610	Orange	0.56-Inch; Common Anode; RHDP; 2-Digit		
	MAN6640		0.56-Inch; Common Cathode; RHDP; 2-Digit		
	MAN6710	Red	0.56-Inch; Common Anode; RHDP; 2-Digit	125 μ cd @ 10 mA	
	MAN6740		0.56-Inch; Common Cathode; RHDP; 2-Digit		
	MAN6810	Yellow	0.56-Inch; Common Anode; RHDP; 2-Digit	510 μ cd @ 10 mA	
	MAN6840		0.56-Inch; Common Cathode; RHDP; 2-Digit		
	MAN6910	High Eff. Red	0.56-Inch; Common Anode; RHDP; 2-Digit	320 μ cd @ 10 mA	
	MAN6940		0.56-Inch; Common Cathode; RHDP; 2-Digit		

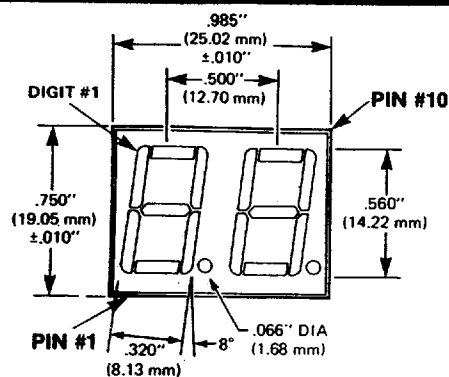

T-41-33

PIN CONNECTIONS (See note)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	APPLICATIONS
Ec	Dc	ca	Cc	DPc	Bc	Ac	ca	Fc	Gc	—	—	—	—	—	—	—	—	POS Terminals Computers Instruments Test Equipment Clocks/Radios TV Channel Indicators
Ea	Da	cc	Ca	DPa	Ba	Aa	cc	Fa	Ga	—	—	—	—	—	—	—	—	
Ec	Dc	ca	Cc	DPc	Bc	Ac	ca	Fc	Gc	—	—	—	—	—	—	—	—	
Ea	Da	cc	Ca	DPa	Ba	Aa	cc	Fa	Ga	—	—	—	—	—	—	—	—	
Ec	Dc	ca	Cc	DPc	Bc	Ac	ca	Fc	Gc	—	—	—	—	—	—	—	—	
Ea	Da	cc	Ca	DPa	Ba	Aa	cc	Fa	Ga	—	—	—	—	—	—	—	—	
Ec	Dc	ca	Cc	DPc	Bc	Ac	ca	Fc	Gc	—	—	—	—	—	—	—	—	POS Terminals Computers Instruments Test Equipment Clocks/Radios TV Channel Indicators
Ea	Da	cc	Ca	DPa	Ba	Aa	cc	Fa	Ga	—	—	—	—	—	—	—	—	
Ec	Dc	ca	Cc	DPc	Bc	Ac	ca	Fc	Gc	—	—	—	—	—	—	—	—	
Ea	Da	cc	Ca	DPa	Ba	Aa	cc	Fa	Ga	—	—	—	—	—	—	—	—	
Ec	Dc	ca	Cc	DPc	Bc	Ac	ca	Fc	Gc	—	—	—	—	—	—	—	—	
Ea	Da	cc	Ca	DPa	Ba	Aa	cc	Fa	Ga	—	—	—	—	—	—	—	—	
Ec	Dc	ca	Cc	DPc	Bc	Ac	ca	Fc	Gc	—	—	—	—	—	—	—	—	
Ea	Da	cc	Ca	DPa	Ba	Aa	cc	Fa	Ga	—	—	—	—	—	—	—	—	
Ec	Dc	ca	Cc	DPc	Bc	Ac	ca	Fc	Gc	—	—	—	—	—	—	—	—	
Ea	Da	cc	Ca	DPa	Ba	Aa	cc	Fa	Ga	—	—	—	—	—	—	—	—	
Ec1	Dc1	Cc1	DPc1	Ec2	Dc2	Gc2	Cc2	DPc2	Bc2	Ac2	Fc2	ca2	ca1	Bc1	Ac1	Gc1	Fc1	POS Terminals Computers Instruments Test Equipment Clocks/Radios TV Channel Indicators
Ea1	Da1	Ca1	DPa1	Ea2	Da2	Ga2	Ca2	DPa2	Ba2	Aa2	Fa2	cc2	cc1	Ba1	Aa1	Ga1	Fa1	
Ec1	Dc1	Cc1	DPc1	Ec2	Dc2	Gc2	Cc2	DPc2	Bc2	Ac2	Fc2	ca2	ca1	Bc1	Ac1	Gc1	Fc1	
Ea1	Da1	Ca1	DPa1	Ea2	Da2	Ga2	Ca2	DPa2	Ba2	Aa2	Fa2	cc2	cc1	Ba1	Aa1	Ga1	Fa1	
Ec1	Dc1	Cc1	DPc1	Ec2	Dc2	Gc2	Cc2	DPc2	Bc2	Ac2	Fc2	ca2	ca1	Bc1	Ac1	Gc1	Fc1	
Ea1	Da1	Ca1	DPa1	Ea2	Da2	Ga2	Ca2	DPa2	Ba2	Aa2	Fa2	cc2	cc1	Ba1	Aa1	Ga1	Fa1	
Ec1	Dc1	Cc1	DPc1	Ec2	Dc2	Gc2	Cc2	DPc2	Bc2	Ac2	Fc2	ca2	ca1	Bc1	Ac1	Gc1	Fc1	
Ea1	Da1	Ca1	DPa1	Ea2	Da2	Ga2	Ca2	DPa2	Ba2	Aa2	Fa2	cc2	cc1	Ba1	Aa1	Ga1	Fa1	
Ec1	Dc1	Cc1	DPc1	Ec2	Dc2	Gc2	Cc2	DPc2	Bc2	Ac2	Fc2	ca2	ca1	Bc1	Ac1	Gc1	Fc1	
Ea1	Da1	Ca1	DPa1	Ea2	Da2	Ga2	Ca2	DPa2	Ba2	Aa2	Fa2	cc2	cc1	Ba1	Aa1	Ga1	Fa1	

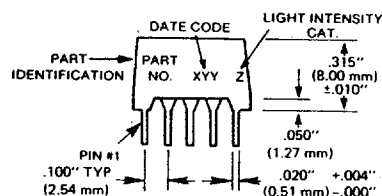

ca = common anode
cc = common cathode
DP = decimal point
NC = no connection
NP = no pin