


HITACHI Mini-Portable Dual-Trace Oscilloscope

V-209 DC-20MHz

Battery Operated

Designed-In Ease of Operation

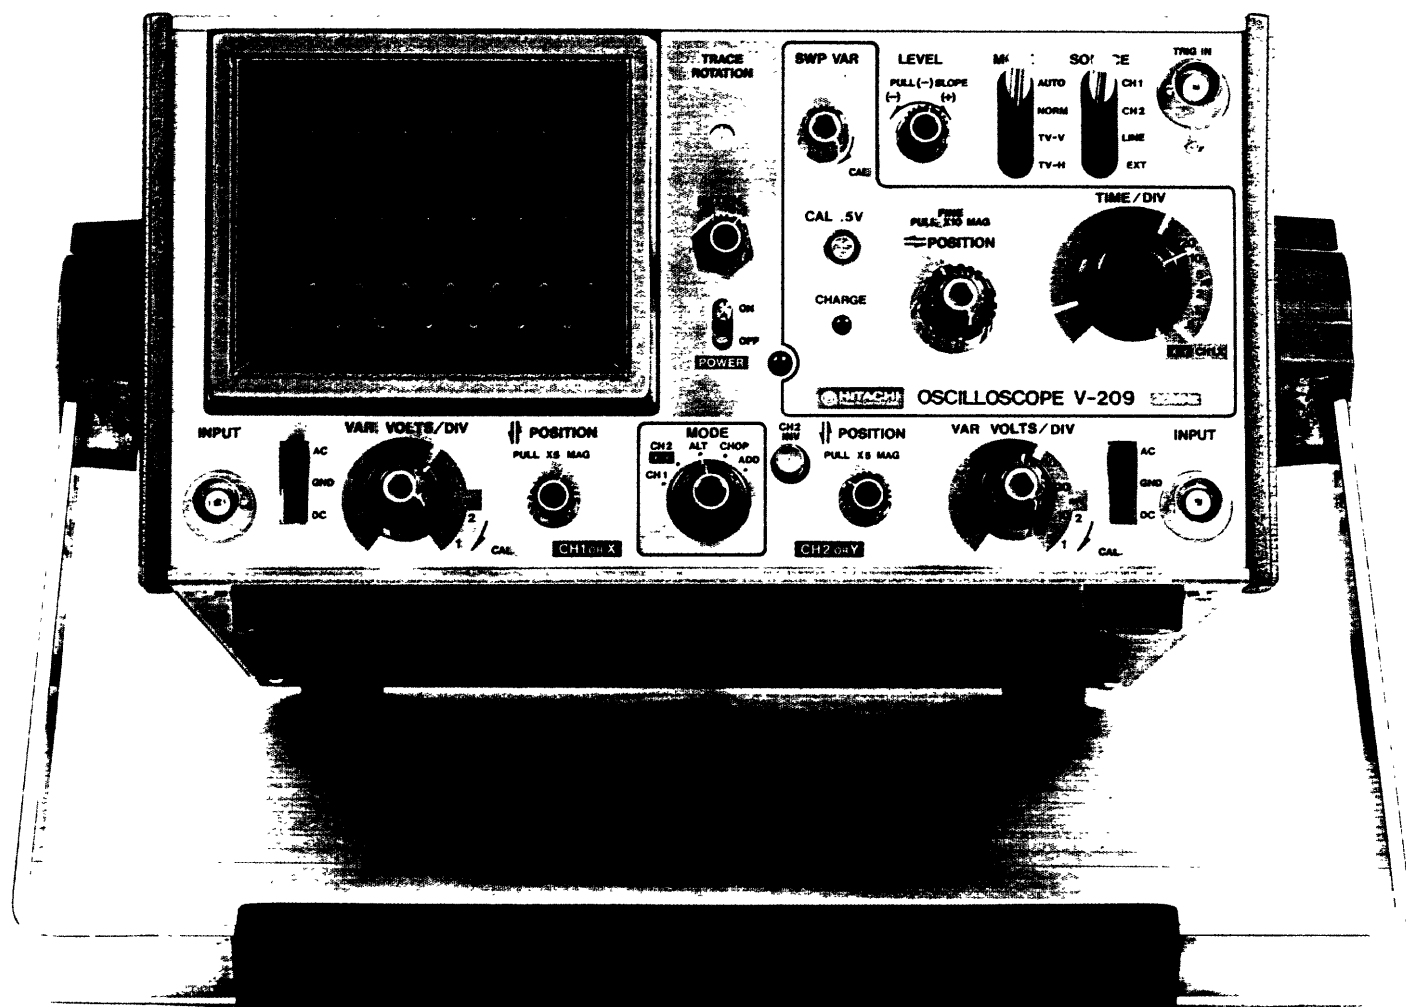

Hitachi Mini-Portable Oscilloscope V-209

FEATURES

- 1 A three-way power supply takes the V-209 anywhere, anytime for speedy field measurements.
- 2 High sensitivity (1mV/div at 10MHz) and fast sweep times (50ns/div) make the V-209 a valuable tool in R&D as well as servicing in a wide variety of applications including computers and video equipment.
- 3 A built-in TV sync separation circuit with easily selectable TV-V and TV-H modes ensures stable observation of both vertical and horizontal TV signal waveforms.
- 4 An auto focus feature maintains constant trace focus without the necessity of troublesome manual focus adjustments.
- 5 The human-engineered front panel layout groups controls into function related clusters for ease-of-use.
- 6 The V-209 is just what it claims to be—a powerful field service tool in a compact, lightweight package.

SPECIFICATIONS

C.R.T

Type Hitachi 95MB31 rectangular tube with 1.5kV acceleration potential.
Screen type P31 (GH) phosphor standard
Useful screen area

8 x 10 div (1 div = 6.35mm)

Graticule

Internal graticule
Z-axis input DC-coupled positive-going signal decreases intensity: 5Vp-p signal causes noticeable modulation at normal intensity: DC to 1MHz.

VERTICAL DEFLECTION (2 identical Channels)

Bandwidth and Rise time

DC to at least 20MHz and rise time 17.5ns or less. DC to at least 5MHz and rise time 70ns or less at magnifier extends. Lower -3dB point, AC coupling 10Hz or less. 10x probe: 1Hz or less.

Deflection Factor

5mV/div to 5V/div in 10 calibrated steps, 1-2-5 sequence.
Uncalibrated continuous control between steps 1: <2.5.
x5 magnifier extends min. deflection rate to 1mV/div.

Accuracy

±3% (+10 to +35°C)

Display modes

Additional error for magnifier ±2%
CH1, CH2 (normal or invert) Alternate, chopped (250kHz rate), Added.

Input Impedance

1M ohm ±2% in parallel with 30pF approx.

Maximum Input Voltage

250V (DC + peak AC).

HORIZONTAL DEFLECTION

Time Base

0.5µs/div to 0.2s/div in 18 calibrated steps, 1-2-5 sequence.
Uncalibrated continuous control between steps 1: <2.5
x10 magnifier extends fastest sweep rate to 50ns/div.

Accuracy

±3% (+10 to +35°C)
Additional error for magnifier ±2%.

TRIGGERING

Trigger Modes

Automatic, Normal, TV-V, TV-H.

Trigger Source

Internal (Ch1, Ch2), Line, External.

Trigger Slope

+ or -

Trigger Sensitivity

	DC to 5MHz	5 to 20 MHz
Internal	0.5div	1.5div
External	150mV	500mV

Trigger Coupling

AC: 30Hz to full bandwidth

External Trigger

Input Impedance 1M ohm ±20% in parallel with 30pF approx.

Maximum Input Voltage

250V (DC + peak AC)

X-Y OPERATION (CH1; Horiz, CH2; Vert)

Deflection Factor

Same as vertical deflection

Accuracy

Y: ±3% (+10 to +35°C)
X: ±5% (+10 to +35°C)
Additional error for CH1 and CH2 magnifier ±2%
DC to at least 200kHz
3° or less from DC to 100kHz

Bandwidth

Phase Error

CALIBRATOR

0.5V ±1% Frequency 1kHz ±30% square wave

POWER

Line Voltage

100V (90~130V)
200V (180~260V), 50/60/400Hz
External DC: 11~14V, 0.8A
Battery operation: Approx. 2 hours continuous use with the AD-209

POWER CONSUMPTION

18W Approx. at normal line voltage

DIMENSION AND WEIGHT

215(W) x 110(H) x 350(D)mm
(8.5 x 4.3 x 13.8 in)
5.3 kg (11.7 lb)

AMBIENT TEMPERATURES

Rated range of use: +10 to +35°C
Limits of operation: 0 to +50°C
Storage and transport: -20 to +70°C

M.T.B.F.


20,000 hours for target value

ACCESSORIES SUPPLIED

Two AT-10AK 1.5 Probes (10:1, 1:1 switchable), Fuse, Power cable, DC power cable, Operation manual, AD-209 Battery Pack.

OPTIONS

B-354 Viewing Hood, No. 8101 Shoulder Belt, No. 6702 Accessory Pouch, No. 6804 Front Cover.

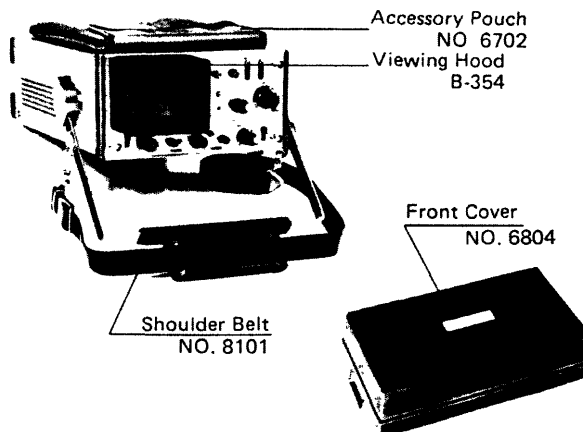

Hitachi Denshi, Ltd.

23-2, Kanda-Sude-cho 1-chome, Chiyoda-ku, Tokyo 101, Japan
Telephone (03)255-8411, Fax (03)257-1433, Telex J24178

Hitachi Denshi America, Ltd.

Head Office: 175 Crossways Park West, Woodbury, New York 11797, U.S.A.
Telephone (516) 921-7200, Fax: 516-498-3718, Telex: 510-221-1899
New York Office: 250 East Devon Ave., Suite 115 Itasca, Illinois 60143, U.S.A.
Chicago Office: Telephone (312) 250-8050, Fax: 312-250-8054
Los Angeles Office: 18005 South Adna Maru Lane, Carson, California 90746, U.S.A.
Telephone (213)538-4880, Fax: 213-515-1029
Dallas Office: 14169 Proton Road, Dallas, Texas 75234, U.S.A.
Telephone (214) 233-7823, Fax: 214-458-9284
Atlanta Office: 3610 Clearview Parkway, Doraville, Georgia 30340, U.S.A.
Telephone: (404)451-9453, Fax: 404-458-8356
Toll Free Telephone (800) 426-3620

Hitachi Denshi Ltd. (Canada)

Head Office: 65 Melford Drive, Scarborough, Ontario M1B 2G6, Canada
Telephone (416) 299-5900, Fax (416) 299-0450, Telex: 652-5324
Eastern Office: 8096 Trans-Canada Drive, St-Laurent, Quebec H4S 1M5, Canada
Telephone (514)332-6687, Fax: (514) 335-1664, Telex: 582-4768
Western Office: 3433-12th St North-East, Calgary, Alberta T2E 6S6, Canada
Telephone (403) 291-4388, Fax: (403) 250-1834, Telex: 382-5861
Ottawa Office: 159 Colonnade Road, Unit #3, Nepean, Ontario, K2E 7J4, Canada
Telephone (613)727-3930, Fax: (613) 727-3955, Telex: 053-4533

Hitachi Denshi (Europe) GmbH

Head Office: Westlicher Straße 68, D-6054 Rodgau 1 (Jügesheim), West Germany
Telephone (06106) 13027, Fax: (06106) 16906, Telex: 417-849

Hitachi Denshi (U.K.) Ltd.

Head Office: Gamck Industrial Centre, Gamck Road, Hendon, London NW9 9AP, United Kingdom
Telephone (01) 202-4311, Fax: 01-202-2451, Telex: 27449
Leeds Office: Video House, 55 Manor Road, Leeds, LS11 5PZ, United Kingdom
Telephone 0532-430294, Fax: 0532-459263

Specifications are subject to change without notice.