

SINGLE TONE MELODY C-MOS

■ GENERAL DESCRIPTION

The NJU501 series is a single tone melody C-MOS IC incorporated with 64 notes ROM.

It plays the melody using a piezo buzzer and single battery only.

The NJU501 has 3 kinds of playing modes and these modes can be selected by either bonding or soldering option.

After melody playing, the LSI shifts mode to the power saving mode with oscillation stop to realize the long battery life.

The NJU501 series is suitable for melody greeting cards, toys, telephone rests and so on.

■ PACKAGE OUTLINE



NJU501CXX

NJU501DXX




NJU501MXX


■ FEATURES

- Operating Voltage --- 1.2 ~ 3.6V
- Low Current Consumption
- 3 kinds of Playing Modes
 - Bonding or Soldering Option
- CR Oscillation Circuits On-chip
- Piezo Buzzer Direct Drive
- Minimum External Components
- Power Saving Function
 - Oscillation Stop After Replay
 - Value Shifted Pull-down Resistance
- Package Outline : DIP / DMP / CHIP 8
- C-MOS Technology

■ PIN CONFIGURATION



■ PAD LOCATION



■ COORDINATES


UNIT: μm

| No. | PAD Name | X | Y |
|-----|-----------------|------|------|
| 1 | TSM(NC) | 1830 | 1780 |
| 2 | V _{SS} | 1540 | 1870 |
| 3 | P ₁ | 870 | 1870 |
| 4 | P ₂ | 460 | 1870 |
| 5 | V _{SS} | 130 | 1840 |
| 6 | OUT | 460 | 130 |
| 7 | OUT | 870 | 130 |
| 8 | TCL(NC) | 1320 | 130 |
| 9 | V _{DD} | 1830 | 130 |


CHIP SIZE: 1.96X2.00mm

CHIP THICKNESS: 400 $\mu\text{m} \pm 30 \mu\text{m}$

■ APPLICATION CIRCUITS (CHIP FORM)

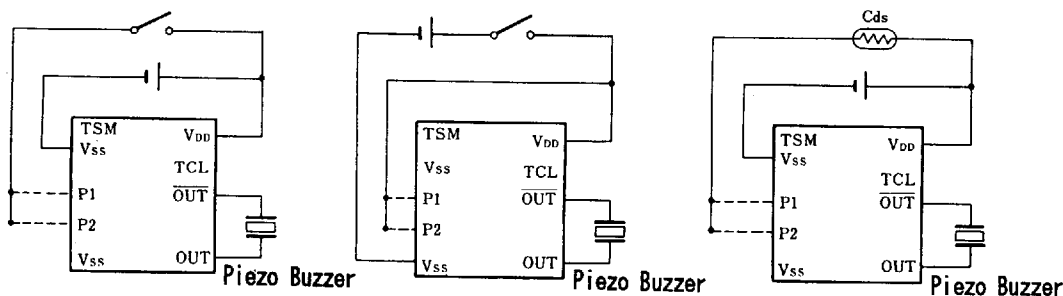

■ APPLICATION CIRCUITS (PACKAGE FORM)

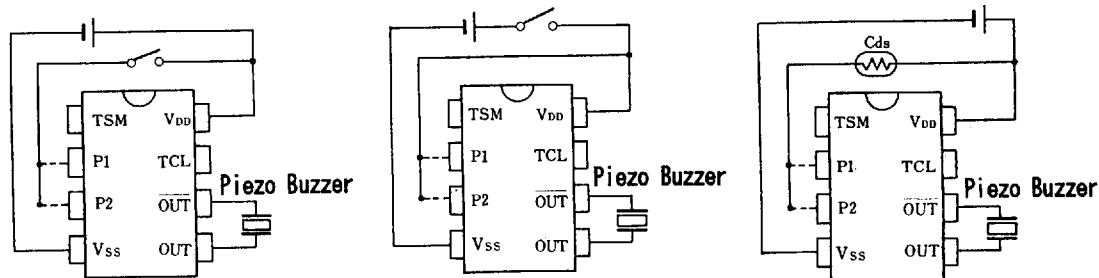

■ PLAYING MODE


The NJU501 series have following 3 kinds of playing mode selected by P1 and/or P2 terminal.

| P1 | P2 | Playing Mode |
|----|----|---------------------------------|
| ○ | | One-Shot 1 (Edge trigger type) |
| | ○ | One-Shot 2 (Level control type) |
| ○ | ○ | Level Hold |

(1) One-shot 1

Melody is playing once when the P1 input turns on, then automatically stops at its end.


The P1 input is disregard during the play.

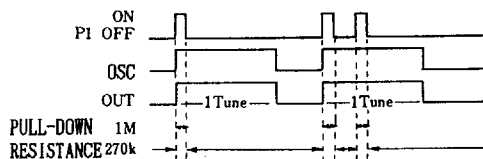

(2) One-shot 2

When the P2 input is remaining on over the one play cycle, melody is played once then automatically stops at its end.


When the P2 input is turned off before the melody end, the melody stops halfway.

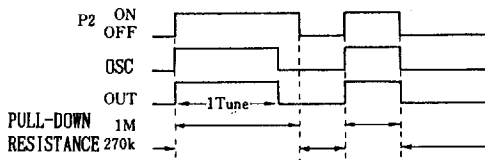

(3) Level hold

Melody is repeated while the both inputs of P1 and P2 remaining on.

It stops when both inputs of P1 and P2 are turned off.

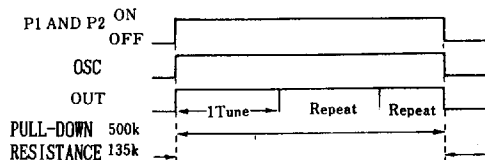

Note 1) Turn on level of P1 and P2 is V_{DD} .

Note 2) Minimum pulse width of all inputs are required over then 64msec as chatter free time.

■ POWER SAVE FUNCTION

- (1) Oscillation Stop Function.....Oscillation stops automatically when melody stops.
The current consumption is less then $0.3\mu A$ while no playing.
- (2) Input Current on P1 and P2.....Variable Pull-down resistance of P1 and P2 is controlled by switch conditions is as follows:
 During making (V_{DD})..... $1M\Omega/1$ Input
 During breaking (V_{SS})..... $270K\Omega/1$ Input
 This function is especially effective for Cds using application.

■ ABSOLUTE MAXIMUM RATINGS

| P A R A M E T E R | S Y M B O L | R A T I N G S | U N I T |
|-----------------------|-----------------|------------------------------|---------|
| Supply Voltage | $V_{DD}-V_{SS}$ | - 0.3 ~ + 5.0 | V |
| Input Voltage | V_{IN} | $V_{SS}-0.2 \sim V_{DD}+0.2$ | V |
| Operating Temperature | T_{opr} | - 30 ~ + 85 | °C |
| Storage Temperature | T_{stg} | - 65 ~ + 125 | °C |

■ ELECTRICAL CHARACTERISTICS

($T_a=25^{\circ}C$, $V_{DD}=1.5V$)

| P A R A M E T E R | S Y M B O L | C O N D I T I O N S | M I N | T Y P | M A X | U N I T |
|-----------------------|-------------|-------------------------------------|----------------|-------|-------|---------|
| Operating Voltage | V_{DD} | | 1.2 | 1.5 | 3.6 | V |
| Stand-by Current | I_{DD1} | No Play, P1, P2 Open | | 0.01 | 0.3 | μA |
| Operating Current | I_{DD2} | Playing, OUT, \overline{OUT} Open | | 40 | 70 | μA |
| Input Current | I_{IL} | P1, P2 | $V_{IL}=0.4V$ | 0.7 | 1.5 | μA |
| | I_{IH} | | $V_{IH}=1.1V$ | 0.7 | 1.5 | |
| Output Current | I_{OL} | OUT, \overline{OUT} | $V_{OL}=0.75V$ | 2.0 | | mA |
| | I_{OH} | | $V_{OH}=0.75V$ | 2.0 | | |
| Oscillation Frequency | f_o | | 80 | 100 | 120 | kHz |
| Osc. Stop Voltage | V_{DS} | | | | 1.2 | V |

■ MUSICAL SPECIFICATION

(1) TEMPO

NJU501 series can take from any one of following 15 different tempos.

| $J =$ | Tempo |
|-------|------------|
| 43.5 | LARGO |
| 46.4 | |
| 49.7 | |
| 53.5 | ADAGIO |
| 58 | |
| 63.3 | |
| 69.6 | ANDANTE |
| 77.3 | |
| 87 | |
| 99.4 | MODERATO |
| 116 | |
| 139 | ALLEGRETTO |
| 174 | |
| 232 | PREST |
| 348 | |

(2) NOTE/REST

The following 8 different notes and rest are provided.

Other kinds of note and rests may also be played by using TIE function.

| 音 符 | 休 符 |
|-----|-----|
| | |
| | |
| | |
| | |
| | |
| | |
| | |

(3) JUMP FUNCTION


Jump function saves the number of notes programmed by repeating the same part.
Maximum 7 jumps are available.

(4) COMPASS & SCALE

NJU501 series can play 15 kinds of scales over $3\frac{1}{2}$ octave of G3 to D7 or G4 to D8.

■ ORDERING INFORMATION

The NJU501 series is named by following rules:

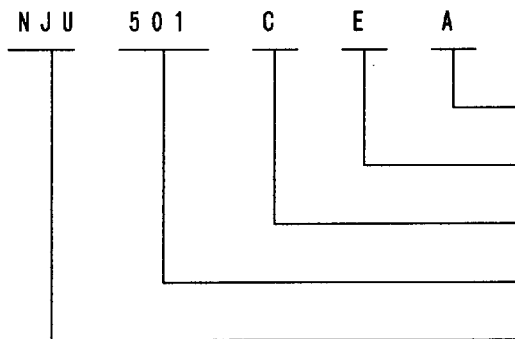

Music title

Music field

Package outline (C: Chip, D: DIP, M: DMP)

Device name

The mark of NJRC C-MOS products