


DFB/EA Laser Module for 2.5 Gb/s Applications

Key Features

- 1550 nm DFB CW source monolithically integrated with an Electro Absorption-modulator (EA)
- Hermetic, 14 pin butterfly package
- Single-mode fiber pigtail
- 4 GHz typical bandwidth
- -3 dBm output power
- Multisourced footprint

Applications

- 2.5 Gb/s
- DWDM systems

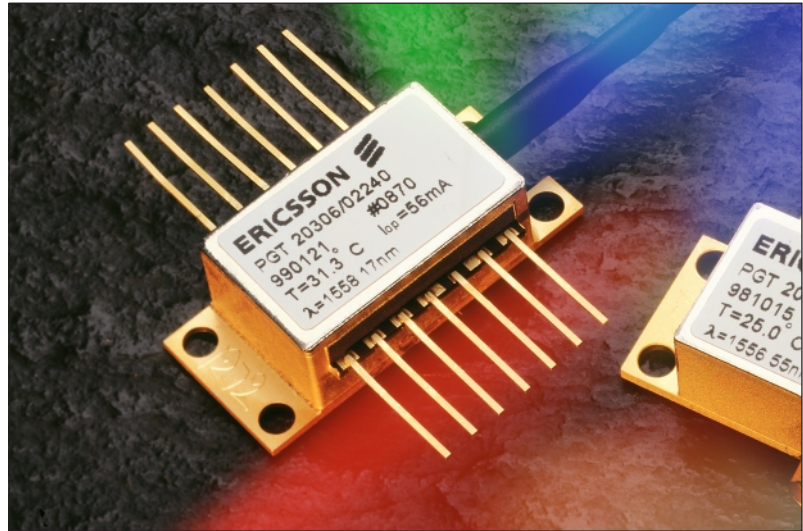

Description

The laser module, intended for DWDM applications at OC-48/STM-16, consists of a DFB laser with integrated absorption modulator mounted in a high speed package including isolator. Laser wavelengths are available according to the ITU-T grid.

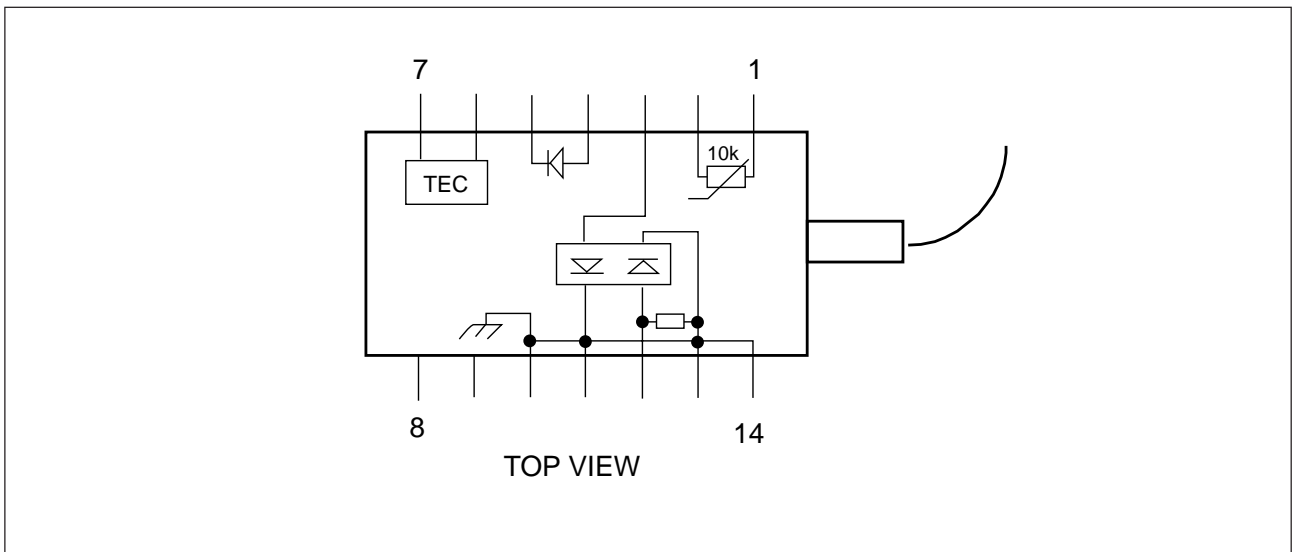


Figure 1. Block diagram

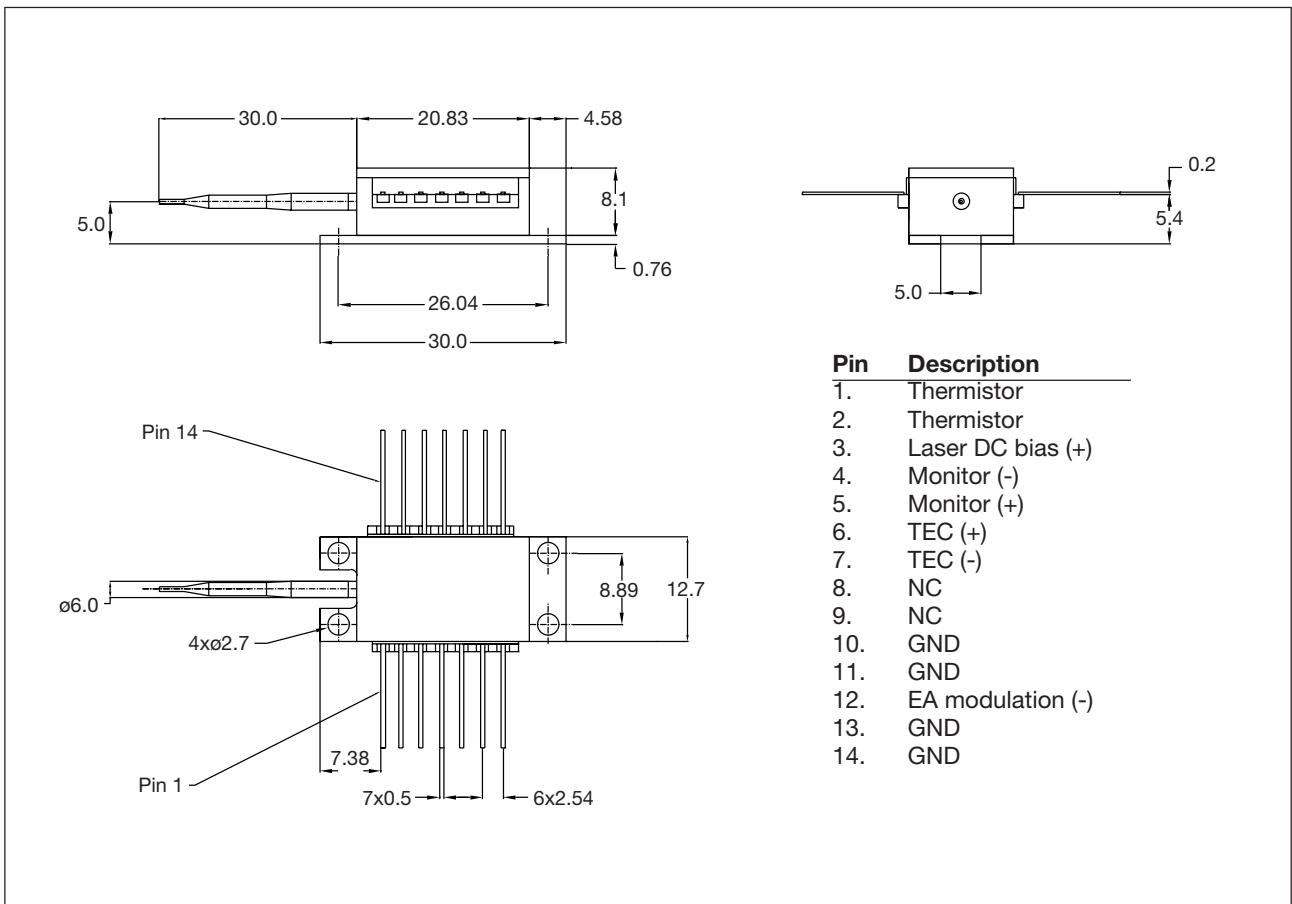


Figure 2. Mechanical outline and pin description

Optical Characteristics

Electrical and optical characteristics at recommended operating conditions, unless otherwise noted.

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Wavelength	ITU-T grid	λ	1530		1564	nm
Output power	BOL	P_{out}	-3			dBm
Extinction ratio	$2.5 V_{pp}$	ER	10			dB
Dispersion penalty	@ 9000 ps/nm disp.				1.5	dB
Side mode suppr.ratio		SMSR	35			dB
Optical isolation			30			dB

Electrical Characteristics

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Operating Current		I_{op}	50		100	mA
Threshold Current		I_{th}			25	mA
Forward Voltage		V_f			2	V
Reflection E/E	0-3 GHz	S_{11}			-10	dB
Small signal modulation bandwidth	-3 dB _e	f_c	3			GHz
Rise/Fall time	20/80%	t_r/t_f			125	ps
Monitor current			0.1		1	mA
Monitor dark current	-5 V			5	100	nA
Thermistor resistance	@ 25 °C		9.5		10.5	k Ω
TEC Voltage			-2.5		2.5	V
Current			-1.2		1.2	A
Power					3	W

Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T_{Case}	0		70	°C
Operating Chip Temperature	T_{op}	20		35	°C

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature, maximum duration 12 months	T_{Stg}	-40	85	°C
Laser forward current	I_{LD}		150	mA
Modulator voltage	V_{mod}	-4	1	V

CAUTION: Stresses outside those listed in "Absolute Maximum Ratings" may cause permanent damage to the device.

Handling Precautions

This device may be damaged as a result of electrostatic discharge (ESD). Take proper precautions during both handling and testing. This typically includes grounded wrist wraps, workbenches and floor mats in ESD controlled areas. Semiconductor devices may be damaged by current surges, use appropriate transient protection.

Quality Assurance

Ericsson Microelectronics commitment to quality has been proven through a decade of semiconductor device production and has been confirmed to ISO 9001. Opto product qualification is made according to the intention of applicable Telcordia standards.

Connector Options

FC/PC

SC

(Other connectors available on request)



Information given in this data sheet is believed to be accurate and reliable. However no responsibility is assumed for the consequences of its use nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Ericsson Microelectronics. These products are sold only according to Ericsson Microelectronics' general conditions of sale, unless otherwise confirmed in writing.

Product specifications subject to change without notice.

Ericsson Microelectronics AB

SE-164 81 Kista, Sweden

Telephone: +46 8 757 50 00

www.ericsson.com/microelectronics

For local sales contacts, please refer to our website
or call: Int + 46 8 757 47 00, Fax: +46 8 757 47 76

1522-PGT 203 06 Rev. E

© Ericsson Microelectronics AB, October 2000