
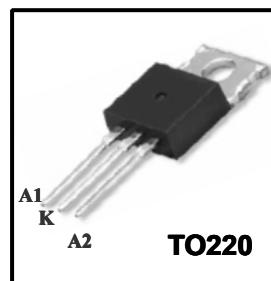


Power Schottky Rectifier

Features

- 20A(1×10A),65V
- $V_F(\text{max})=0.68\text{V}(@T_J=125^\circ\text{C})$
- Low power loss, high efficiency
- Common cathode structure
- Guard ring for over voltage protection, High reliability
- Maximum Junction Temperature Range(175°C)

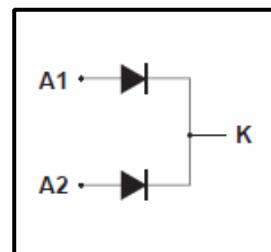

General Description

Dual center tap Schottky rectifiers suited for High frequency switch power supply and Free wheeling diodes, polarity protection applications.

Absolute Maximum Ratings

Symbol	Parameter		Value	Units
V_{DRM}	Repetitive peak reverse voltage		65	V
V_{DC}	Maximum DC blocking voltage		65	V
$I_{F(\text{RMS})}$	RMS forward current		30	A
$I_{F(\text{AV})}$	Average forward current		10	A
	per device	20		
I_{FSM}	Surge non repetitive forward current		150	A
P_{ARM}	Repetitive peak avalanche power		5800	W
I_{RRM}	Repetitive peak reverse current		1	A
dv/dt	Critical rate of rise of reverse voltage		10000	V/ns
T_J	Junction Temperature		175	$^\circ\text{C}$
T_{stg}	Storage Temperature		-40~150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Value			Units
		Min	Typ	Max	
R_{QJC}	Thermal Resistance, Junction-to-Case	-	-	1.9	$^\circ\text{C}/\text{W}$
R_{QCS}	Thermal Resistance, Case-to-Sink	0.1	-	-	$^\circ\text{C}/\text{W}$

Electrical Characteristics (per diode)

Characteristics	Symbol	Test Condition		Min	Typ.	Max	Unit
Reverse leakage current	I_R	VR = VRRM	T _j = 25°C	-	-	30	µA
			T _j = 125°C		-	30	mA
Forward voltage drop	V_F	IF= 10A	T _j = 25°C	-	0.67	0.76	V
			T _j = 125°C	-	0.63	0.68	
		IF= 20A	T _j = 25°C	-	-	0.74	
			T _j = 125°C	-	0.62	0.7	

Note :tp = 380 µs, δ < 2%

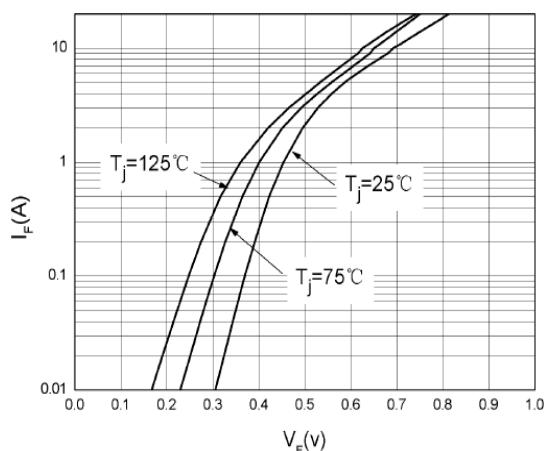


Fig.1 Forward voltage drop versus forward current (maximum values, per diode).

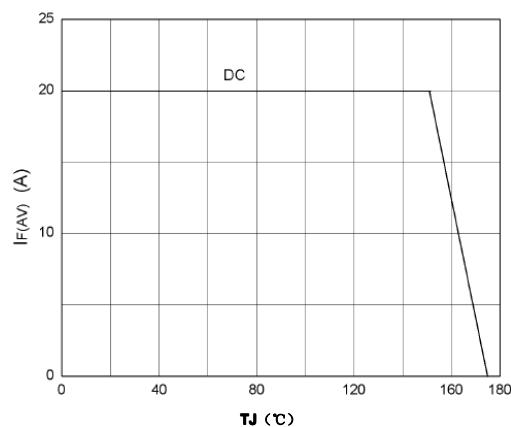


Fig.2 Average current versus ambient temperature ($d=0.5$) (per diode)

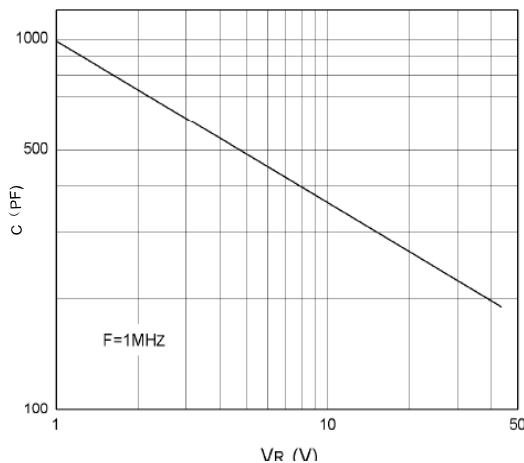


Fig.3 Junction capacitance versus reverse voltage applied (typical values, per diode).

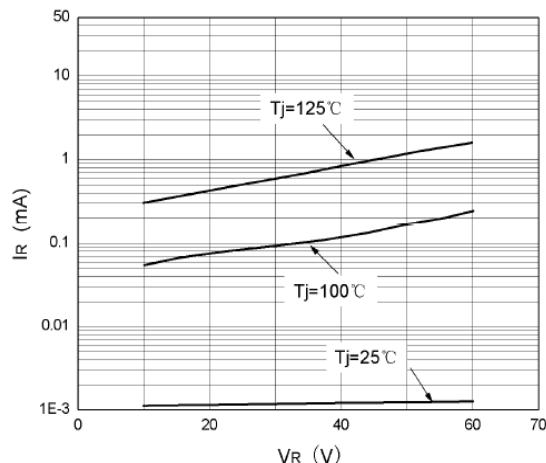


Fig.4 Reverse leakage current versus reverse voltage applied (typical values, per diode)..

TO-220 Package Dimension