

**LG214L**


The LG214L photointerrupter combine high output GaAs IRED with Photo IC. The sensor makes possible easy development of object detecting systems with high performance, high reliability and small equipment size.

**FEATURES**

- PWB direct mount type
- GAP : 3.6mm
- Double-side screw-mount  
(adjustable mounting position)

**DIMENSIONS**

(Unit : mm)

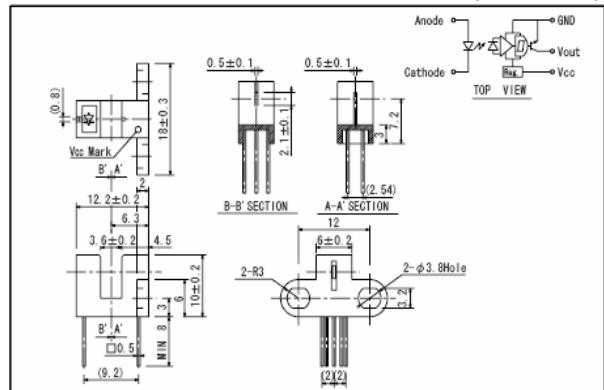**APPLICATIONS**

- Plotters
- Facsimiles
- Auto stampers
- Ticket vending machines

**MAXIMUM RATINGS**

(Ta=25°C)

Item	Symbol	Rating	Unit
Input	P <sub>D</sub>	100	mW
	I <sub>F</sub>	60	mA
	V <sub>R</sub>	5	V
	I <sub>FP</sub>	1	A
Output	V <sub>CC</sub>	17	V
	I <sub>OL</sub>	30	mA
	P <sub>O</sub>	200	mW
	Operating temp. <sup>*2</sup>	Topr.	-20 ~ +85 °C
Storage temp. <sup>*2</sup>	Tstg.	-30 ~ +85	°C
	Tsol.	260	°C

\*1. Pulse width : tw≤100us. period T=10ms

\*2. No icebound or dew      \*3. For MAX. 5 seconds at the position of 1mm from the resin edge.

**ELECTRO-OPTICAL CHARACTERISTICS**


(Ta=25°C)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	V <sub>F</sub>	I <sub>F</sub> =20mA	-	1.2	1.4	V
	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	µA
	λ <sub>p</sub>	I <sub>F</sub> =20mA	-	940	-	nm
Output	V <sub>CC</sub>	-	4.5	-	16.5	V
	V <sub>OL</sub>	V <sub>CC</sub> =5V, I <sub>F</sub> =20mA, I <sub>OL</sub> =16mA	-	0.2	0.4	V
	V <sub>OH</sub>	V <sub>CC</sub> =5V, I <sub>F</sub> =0mA, R <sub>L</sub> =10kΩ	4.5	-	-	V
	I <sub>CCL</sub>	V <sub>CC</sub> =5V, I <sub>F</sub> =20mA, R <sub>L</sub> =10kΩ	-	3	10	mA
	I <sub>CCH</sub>	V <sub>CC</sub> =5V, I <sub>F</sub> =0mA, R <sub>L</sub> =10kΩ	-	3	10	mA
Trans-mission	I <sub>FHL</sub>	V <sub>CC</sub> =5V, R <sub>L</sub> =10kΩ	-	-	12	mA
	I <sub>FLH</sub> / I <sub>FHL</sub>	V <sub>CC</sub> =5V, R <sub>L</sub> =10kΩ	0.50	0.80	0.95	-
	t <sub>PHL</sub>	V <sub>CC</sub> =5V, I <sub>F</sub> =18mA, R <sub>L</sub> =3.3kΩ	-	3	-	µs
	t <sub>PLH</sub>		-	1	-	µs
	Rise time		-	0.6	-	µs
	Fall time		-	0.02	-	µs


\*4. I<sub>FHL</sub> represents forward current when output changes from high to low.

\*5. I<sub>FLH</sub> represents forward current when output changes from low to high.


**Collector power dissipation Vs.  
Ambient temperature**

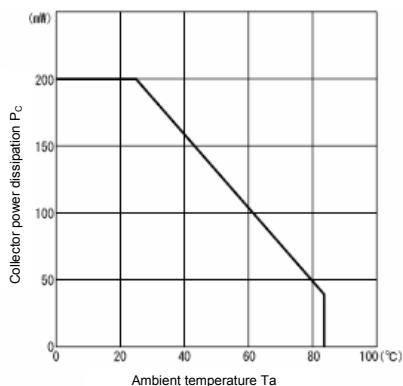


**Forward current Vs.  
Forward voltage**

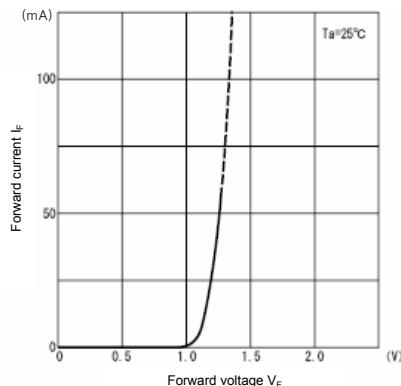


**Low level output voltage Vs.  
Low level output current**

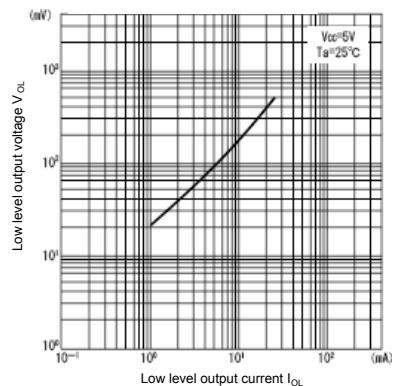


**Relative threshold input current  
Vs. Supply voltage**

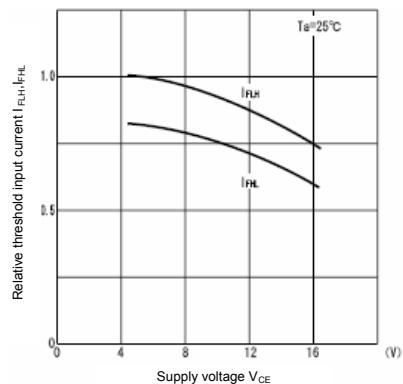

**Relative threshold input current  
Vs. Ambient temperature**

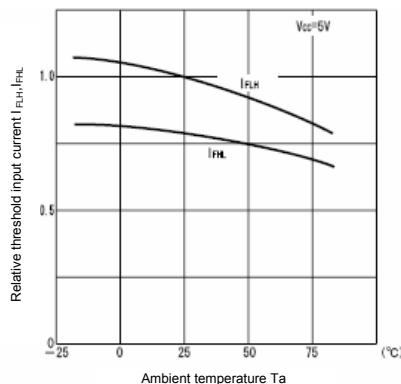

Measurement of high level output voltage

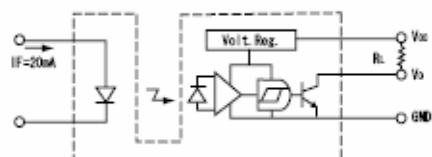

Measurement of propagation time

