

**Microsemi Corp.**  
*The diode experts*

SANTA ANA, CA  
 For more information call:  
 (714) 979-8220

SCOTTSDALE, AZ  
 For more information call:  
 (602) 941-6300

**1.5KCD6.8 thru  
 1.5KCD200A,  
 CD5908 and CD6267  
 thru CD6303A  
 Transient Suppressor  
 CELLULAR DIE PACKAGE**

**APPLICATION**

This TAZ\* series has a peak pulse power rating of 1500 watts for one millisecond. It can protect integrated circuits, hybrids, CMOS, MOS and other voltage sensitive components that are used in a broad range of applications including: telecommunications, power supplies, computers, automotive, industrial and medical equipment. TAZ\* devices have become very important as a consequence of their high surge capability, extremely fast response time and low clamping voltage.

The cellular die (CD) package is ideal for use in hybrid applications and for solder mounting. The cellular design in hybrids assures ample bonding with immediate heat sinking to provide the required transient peak pulse power of 1500 watts.

**FEATURES**

- ☑ Economical
- ☑ 1500 Watts peak pulse power dissipation
- ☑ Stand-Off voltages from 5.0V to 171V
- ☑ Uses thermally passivated die design
- ☑ Additional silicone protective coating over die for rugged environments
- ☑ Stringent process norm screening
- ☑ Low leakage current at rated stand-off voltage
- ☑ Exposed metal surfaces are readily solderable
- ☑ 100% lot traceability
- ☑ Manufactured in the U.S.A.
- ☑ Meets JEDEC IN6267 - IN6303A electrically equivalent specifications
- ☑ Available in bipolar configuration
- ☑ Additional transient suppressor ratings and sizes are available as well as zener, rectifier and reference diode configurations. Consult factory for special requirements.

**MAXIMUM RATINGS**

1500 Watts of Peak Pulse Power Dissipation at 25°C\*\*


- clamping (0 Volts to BV Min.):
- unidirectional <math>1 \times 10^{-12}</math> seconds;
- bidirectional <math>5 \times 10^{-9}</math> seconds;

Operating and Storage Temperature: -65°C to +175°C  
 Forward Surge Rating: 200 Amps, 1/120 second at 25°C  
 Steady State Power Dissipation is heat sink dependent.

\*Transient Absorption Zener

\*\*Wire contact or tab geometry for interconnects should be selected with adequate cross-sectional size to prevent fusing relative to peak pulse current rating (Ipp).

**PACKAGE DIMENSIONS**

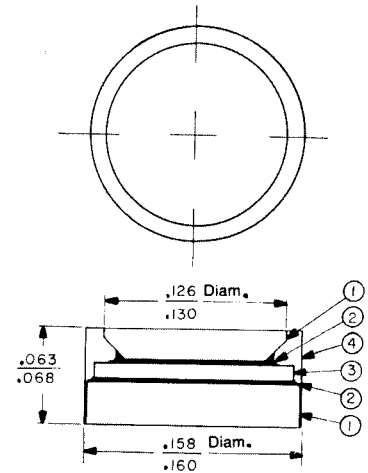

Item Number	Description
1	Nickel and Silver Plated Copper Discs
2	Solder Bond
3	Silicon Die
4	Conformal coating

*Illustration Represents Unipolar Only*

**MECHANICAL CHARACTERISTICS**

**Case:** Nickel and Silver plated copper discs with conformal coating.

**Finish:** Both external surfaces are corrosion resistant, readily solderable.

**Polarity:** Large contact side is cathode

**Mounting Position:** Any

# 1.5KCD6.8 thru 1.5KCD20A, CD5908 and CD6267 thru CD630A CELLULAR DIE PACKAGE

## ELECTRICAL CHARACTERISTICS @ 25°C

Industry Type Number	JEDEC Type Number Elect. Equiv.	Rated Stand-Off Voltage		Breakdown Voltage V(BR) VOLTS		Maximum Clamping Voltage @ I <sub>pp</sub> (1 mSEC)	Maximum Reverse Leakage @ V <sub>WM</sub>	Rated Maximum Peak Pulse Current	Maximum Temperature Coefficient α VZ
		V <sub>WM</sub> VOLTS	V <sub>Z</sub> VOLTS	MIN	MAX				
1.5KCD10	CD6206	5.00	6.00	—	—	7.6	300	30.0	0.57
1.5KCD10A	CD6206A	5.00	6.00	—	—	7.6	300	30.0	0.57
1.5KCD15	CD6215	5.80	6.85	7.14	10.0	10.5	1000	143.0	0.57
1.5KCD15A	CD6215A	5.80	6.85	7.14	10.0	10.5	500	130.0	0.61
1.5KCD20	CD6220	6.40	7.13	7.88	10.0	11.3	500	132.0	0.61
1.5KCD20A	CD6220A	6.40	7.13	7.88	10.0	11.3	200	120.0	0.65
1.5KCD25	CD6225	6.63	7.38	8.02	10.0	12.5	200	120.0	0.65
1.5KCD25A	CD6225A	7.02	7.78	8.61	10.0	13.8	50	109.0	0.68
1.5KCD30	CD6230	7.37	8.13	8.90	10.0	15.2	200	124.0	0.73
1.5KCD30A	CD6230A	7.78	8.65	9.55	10.0	13.4	50	112.0	0.78
1.5KCD35	CD6235	8.10	9.00	11.00	10.0	15.0	10	100.0	0.73
1.5KCD35A	CD6235A	8.55	9.50	10.50	10.0	14.5	10	103.0	0.73
1.5KCD40	CD6240	8.92	9.90	12.10	10.0	16.2	5	93.0	0.71
1.5KCD40A	CD6240A	9.40	10.50	13.00	10.0	15.8	5	96.0	0.75
1.5KCD45	CD6245	9.72	10.80	13.20	10.0	17.3	5	87.0	0.78
1.5KCD45A	CD6245A	10.20	11.40	12.90	10.0	16.7	5	90.0	0.78
1.5KCD50	CD6250	10.50	11.80	13.00	10.0	18.0	5	79.0	0.81
1.5KCD50A	CD6250A	11.10	12.40	13.70	10.0	18.2	5	87.5	0.81
1.5KCD55	CD6255	12.10	13.50	16.50	10.0	22.0	5	68.0	0.84
1.5KCD55A	CD6255A	12.90	14.40	17.80	10.0	23.5	5	64.0	0.86
1.5KCD60	CD6260	13.90	15.20	18.60	10.0	25.0	5	67.0	0.86
1.5KCD65	CD6265	14.50	16.00	19.00	10.0	26.5	5	58.5	0.88
1.5KCD65A	CD6265A	15.30	17.10	20.00	10.0	25.2	5	59.5	0.88
1.5KCD70	CD6270	16.10	18.00	21.00	10.0	27.7	5	54.0	0.90
1.5KCD70A	CD6270A	17.00	19.00	24.00	10.0	31.9	5	47.0	0.92
1.5KCD75	CD6275	18.00	20.50	23.10	10.0	34.0	5	49.0	0.93
1.5KCD75A	CD6275A	19.40	21.90	26.40	10.0	34.7	5	43.0	0.94
1.5KCD80	CD6280	20.50	22.80	25.20	10.0	33.2	5	45.0	0.94
1.5KCD85	CD6285	21.80	24.30	29.70	10.0	39.1	5	38.5	0.96
1.5KCD85A	CD6285A	23.10	25.70	31.40	10.0	37.5	5	40.0	0.96
1.5KCD90	CD6290	24.30	27.00	33.00	10.0	43.5	5	34.5	0.97
1.5KCD90A	CD6290A	25.60	28.40	34.50	10.0	41.4	5	36.0	0.97
1.5KCD95	CD6295	26.80	29.70	36.00	10.0	47.7	5	31.5	0.98
1.5KCD95A	CD6295A	28.20	31.40	34.70	10.0	45.7	5	33.0	0.98
1.5KCD100	CD6300	29.10	32.40	37.00	10.0	50.0	5	29.0	0.99
1.5KCD100A	CD6300A	30.60	34.20	37.80	10.0	49.9	5	30.0	0.99
1.5KCD105	CD6305	31.50	35.20	39.00	10.0	56.5	5	26.5	1.00
1.5KCD105A	CD6305A	33.30	37.10	41.00	10.0	53.9	5	28.0	1.00
1.5KCD110	CD6310	34.40	38.30	42.30	10.0	61.9	5	24.0	1.01
1.5KCD110A	CD6310A	36.80	40.90	45.20	10.0	59.3	5	25.3	1.01
1.5KCD115	CD6315	36.10	42.30	51.70	10.0	67.8	5	22.2	1.01
1.5KCD115A	CD6315A	40.20	44.70	49.40	10.0	64.3	5	23.2	1.01
1.5KCD120	CD6320	41.30	45.70	58.10	10.0	73.5	5	20.4	1.02
1.5KCD120A	CD6320A	43.80	48.50	53.80	10.0	70.1	5	21.4	1.02
1.5KCD125	CD6325	45.40	50.40	61.80	10.0	80.5	5	18.8	1.03
1.5KCD125A	CD6325A	47.80	53.20	58.80	10.0	77.0	5	19.5	1.03
1.5KCD130	CD6330	50.20	55.80	69.20	10.0	89.0	5	15.9	1.04
1.5KCD130A	CD6330A	53.10	58.90	65.10	10.0	85.1	5	16.4	1.04
1.5KCD135	CD6335	55.10	61.20	74.80	10.0	98.0	5	15.3	1.04
1.5KCD135A	CD6335A	58.10	64.60	71.40	10.0	92.0	5	16.3	1.04
1.5KCD140	CD6340	60.70	67.50	80.00	10.0	108.0	5	13.9	1.05
1.5KCD140A	CD6340A	64.10	71.30	78.80	10.0	103.0	5	14.6	1.05
1.5KCD145	CD6345	66.40	73.80	90.20	10.0	118.0	5	12.7	1.05
1.5KCD145A	CD6345A	70.10	77.80	86.10	10.0	113.0	5	13.3	1.05
1.5KCD150	CD6350	73.70	81.90	100.00	10.0	131.0	5	11.4	1.06
1.5KCD150A	CD6350A	77.80	86.50	95.50	10.0	125.0	5	12.0	1.06
1.5KCD155	CD6355	81.00	90.10	110.00	10.0	144.0	5	10.4	1.06
1.5KCD155A	CD6355A	85.50	95.10	105.00	10.0	137.0	5	11.0	1.06
1.5KCD160	CD6360	85.20	94.50	121.00	10.0	165.0	5	9.5	1.07
1.5KCD160A	CD6360A	94.00	105.00	118.00	10.0	152.0	5	9.9	1.07
1.5KCD165	CD6365	87.20	108.00	132.00	10.0	173.0	5	8.7	1.07
1.5KCD165A	CD6365A	102.00	114.00	128.00	10.0	169.0	5	9.1	1.07
1.5KCD170	CD6370	105.00	117.00	143.00	10.0	197.0	5	8.0	1.07
1.5KCD170A	CD6370A	111.00	124.00	137.00	10.0	179.0	5	8.4	1.07
1.5KCD175	CD6375	121.00	135.00	165.00	10.0	215.0	5	7.0	1.08
1.5KCD175A	CD6375A	128.00	143.00	158.00	10.0	207.0	5	7.2	1.08
1.5KCD180	CD6380	130.00	144.00	178.00	10.0	230.0	5	6.5	1.08
1.5KCD180A	CD6380A	136.00	152.00	169.00	10.0	219.0	5	6.8	1.08
1.5KCD185	CD6385	136.00	157.00	187.00	10.0	244.0	5	6.2	1.08
1.5KCD185A	CD6385A	145.00	162.00	179.00	10.0	234.0	5	6.4	1.08
1.5KCD190	CD6390	142.00	162.00	198.00	10.0	268.0	5	5.8	1.08
1.5KCD190A	CD6390A	154.00	171.00	189.00	10.0	248.0	5	6.1	1.08
1.5KCD200	CD6303	162.00	180.00	220.00	10.0	287.0	5	5.2	1.08
1.5KCD200A	CD6303A	171.00	190.00	210.00	10.0	274.0	5	5.5	1.08

V<sub>f</sub> at 100 amps peak. 8.3 ms sine wave equals 3.5 volts maximum. For bidirectional part number add C or CA as suffix (ie: 1.5KCD33C or 1.5KCD33CA; or CD6283C or CD6283CA). Note that for bidirectional types having V<sub>WM</sub> of 8 volts and under, the I<sub>D</sub> leakage current is doubled.

### SYMBOLS AND ABBREVIATIONS

- V<sub>WM</sub> = RATED STAND-OFF VOLTAGE
- I<sub>PP</sub> = PEAK PULSE CURRENT
- V<sub>C</sub> (MAX) = MAXIMUM CLAMPING VOLTAGE
- V(BR) = BREAKDOWN VOLTAGE
- I<sub>T</sub> = TEST CURRENT
- I<sub>D</sub> = REVERSE LEAKAGE

NOTE 1 Normal selection criteria for TAZ\* devices is by rated stand-off voltage (V<sub>WM</sub>) and should be equal or greater than DC or continuous peak operating voltage.

NOTE 2 TAZ\* devices are tested to maximum peak pulse current (I<sub>PP</sub>) with clamping voltage monitored. This surge capability is one of the most significant electrical characteristics of the device and should be considered as part of customer quality inspections.

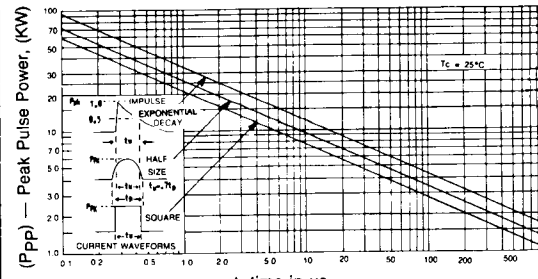


FIGURE 1  
Peak Pulse Power vs Pulse Time

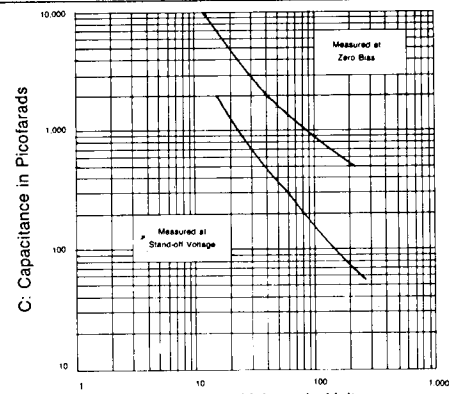


FIGURE 2  
Typical Capacitance vs Breakdown Voltage

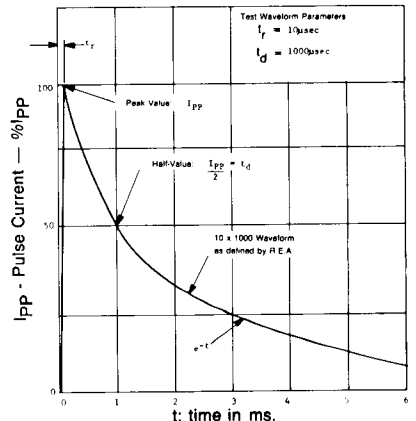


FIGURE 3  
Pulse Wave Form




FIGURE 4  
Derating Curve

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.