

MAXIM

CMOS 8 Bit Multiplying D/A Converter

T-51-09-08

General Description

The AD7523 is high performance multiplying 8 bit digital-to-analog converter (DAC). Low power CMOS technology and low cost make it suitable for a wide range of analog data acquisition and control applications.

Thin-film resistors assure 8 bit resolution with up to 10 bit linearity (L grade) over the full operating temperature range. In addition, all digital inputs are compatible with CMOS logic levels.

Maxim's AD7523 is electrically and pin compatible with the Analog Devices AD7523 and is available in a standard width 16-lead DIP as well as small outline package.

Features

- ◆ 8, 9 and 10 Bit Linearity
- ◆ $\pm 1.5\%$ Untrimmed Gain Accuracy
- ◆ Guaranteed Monotonic
- ◆ Low Feedthrough 1/2LSB at 200kHz
- ◆ Low Power Consumption
- ◆ CMOS Compatible Logic Inputs
- ◆ Widely Second Sourced

AD7523

Applications

Automatic Test Equipment
Digital Calibration Systems
Battery Powered Instruments
Audio Gain Control
Digitally Controlled Filters
Programmable Power Supplies
Motion Control Systems


Ordering Information

PART	TEMP. RANGE	PACKAGE*	ERROR
AD7523JN	0°C to +70°C	Plastic DIP	1/2LSB
AD7523KN	0°C to +70°C	Plastic DIP	1/2LSB
AD7523LN	0°C to +70°C	Plastic DIP	1/2LSB
AD7523JCWE	0°C to +70°C	Small Outline	1/2LSB
AD7523KCWE	0°C to +70°C	Small Outline	1/2LSB
AD7523LCWE	0°C to +70°C	Small Outline	1/2LSB


* All devices — 16 lead packages

2

Pin Configuration

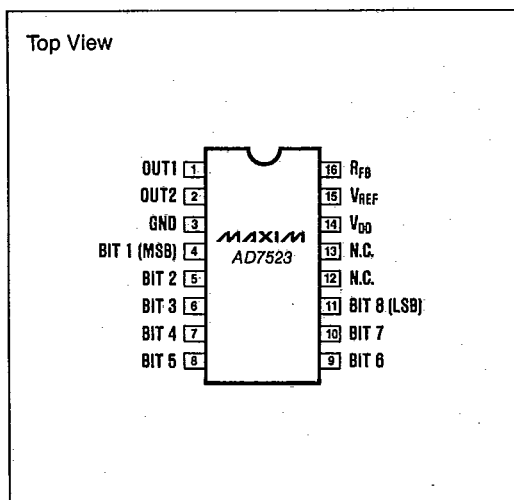

Typical Operating Circuit

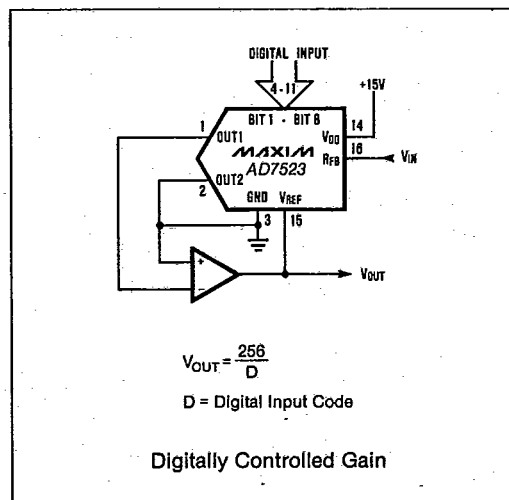

MAXIM

MAXIM is a registered trademark of Maxim Integrated Products

Maxim Integrated Products 2-37

T-51-09-08

CMOS 8 Bit Multiplying D/A Converter

AD7523

ABSOLUTE MAXIMUM RATINGS

V_{DD} to GND	-0.3V, +17V
V_{REF} to GND	±25V
R_{FB} to GND	±25V
Digital Input Voltage to GND	-0.3V, V_{DD}
Output Voltage (OUT1, OUT2) (Note 1)	-0.3V, V_{DD}
Operating Temperature	0°C to +70°C

Storage Temperature	-65°C to +150°C
Lead Temperature (Soldering 10 secs)	+300°C
Power Dissipation to +70°C	
Plastic DIP	670mW
Small Outline	450mW

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($T_A = T_{MIN}$ to T_{MAX} , $V_{DD} = +15V$, $V_{REF} = +10V$, $V_{OUT1} = V_{OUT2} = GND$, unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS		MIN.	TYP.	MAX.	UNITS
DC ACCURACY							
Resolution				8			Bits
Nonlinearity (Note 2)		0.2% FSR = ½LSB 0.1% FSR = ¼LSB 0.05% FSR = ⅛LSB	J K L			±½ ±¼ ±⅛	LSB
Monotonicity				Guaranteed			
Gain Error (Note 2, 3)		Digital Inputs = V _{INH}	T _A = +25°C T _{MIN} to T _{MAX}			±1.5 ±1.8	% FSR
Power Supply Rejection (Note 2)	PSRR	V _{DD} = +14V to +15V	T _A = +25°C T _{MIN} to T _{MAX}			0.02 0.03	%/%V _{DD}
Output Leakage Current		OUT1, Digital Inputs = V _{INL}	T _A = +25°C T _{MIN} to T _{MAX}			±50 ±200	nA
		OUT2, Digital Inputs = V _{INH}	T _A = 25°C T _{MIN} to T _{MAX}			±50 ±200	
V _{REF} Input Resistance	R _{REF}	T _A = +25°C		5	10	20	kΩ
V _{REF} Resistance Tempco		(Note 4)				-500	ppm/°C
AC PERFORMANCE (Note 4)							
Output Current Settling Time to 0.2% of FSR		R _L = 100Ω, Digital Inputs = V _{INH} to V _{INL} and V _{INL} to V _{INH}	T _A = +25°C T _{MIN} to T _{MAX}			150 200	ns
Feedthrough Error		Digital Inputs = V _{INL} , V _{REF} = 20V _{p-p} , 200 KHz	T _A = +25°C T _{MIN} to T _{MAX}			±½ ±1	LSB
Output Capacitance	C _{OUT}	Digital Inputs = V _{INH}	OUT1 OUT2			100 30	pF
		Digital Inputs = V _{INL}	OUT1 OUT2			30 100	
DIGITAL INPUTS							
Logic HIGH Threshold	V _{INH}			+14.5			V
Logic LOW Threshold	V _{INL}						V
Input Leakage Current		Digital Inputs = 0V or +15V				±1	μA
Input Capacitance, (Note 4)						4	pF
Input Coding		Unipolar Operation (Table 1) Bipolar Operation (Table 2)		Binary Offset Binary			
POWER REQUIREMENTS							
Power Supply Range	V _{DD}	Accuracy not guaranteed over this range.		+5			+16 V
Power Supply Current	I _{DD}	Digital inputs = V _{INH} or V _{INL}					100 μA


Note 1: $V_{OUT1, 2}$ may exceed the Absolute Maximum voltage rating if the current is limited to 30mA or less.

Note 2: Using internal feedback resistor (R_{FB}). Full scale range (FSR) = $-(V_{REF} - 1LSB)$ in unipolar mode.

Note 3: Maximum gain change from +25°C to T_{MIN} or T_{MAX} is ±0.3% FSR.

Note 4: Guaranteed by design but not 100% tested.

AD7523



Note: $1\text{LSB} = (2^{-8})(V_{\text{REF}}) = \left(\frac{1}{256}\right)(V_{\text{REF}})$.

Note: 1LSB = $(2^{-7})(V_{REF}) = \left(\frac{1}{128}\right) \cdot (V_{REF})$

Figure 1 is a detailed die layout of the 16K16M16. It shows a rectangular die with various pins and internal structures. The width is labeled as 0.097" (2.484mm) and the height as 0.086" (2.184mm). The pins are labeled as follows: GND, BIT 1, BIT 2, BIT 3, BIT 4, BIT 5, BIT 6, BIT 7, BIT 8, OUT2, OUT1, RFB, VREF, and VDD. The internal structure shows a central core with various peripheral blocks and connections.

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.