

KR Electronics, Inc.

General Description


KR Electronics part number 3094-1 is a 124 MHz highpass filter. The filter has a sharp transition to the stopband and attains over 70 dB by 110 MHz. Other bandwidths are available. Please consult the factory.

Features

- 124 MHz Highpass Filter
- Sharp Transition to the Stopband
- 70 dB min at 110 MHz
- High Stopband Attenuation
- 50 Ω Source and Load
- SMA Connectors
- Also available in surface mount

Typical Performance

Overall Response (10 dB/div)

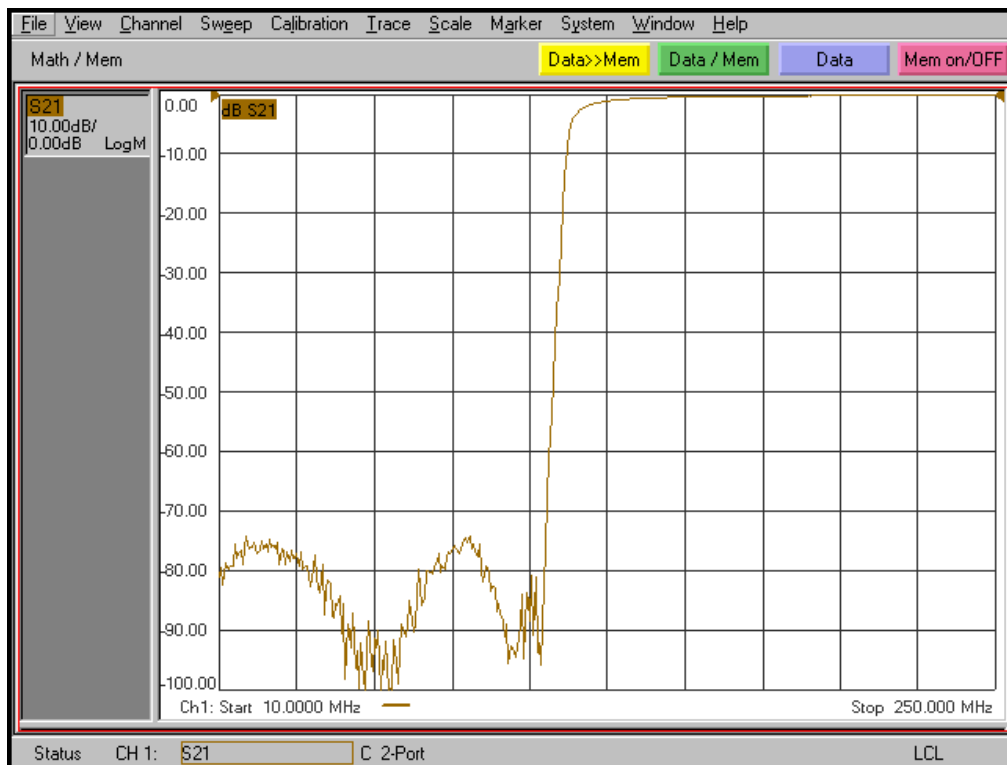


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

Typical Performance

Passband Amplitude & Group Delay (1 dB/div & 10 nsec/div)

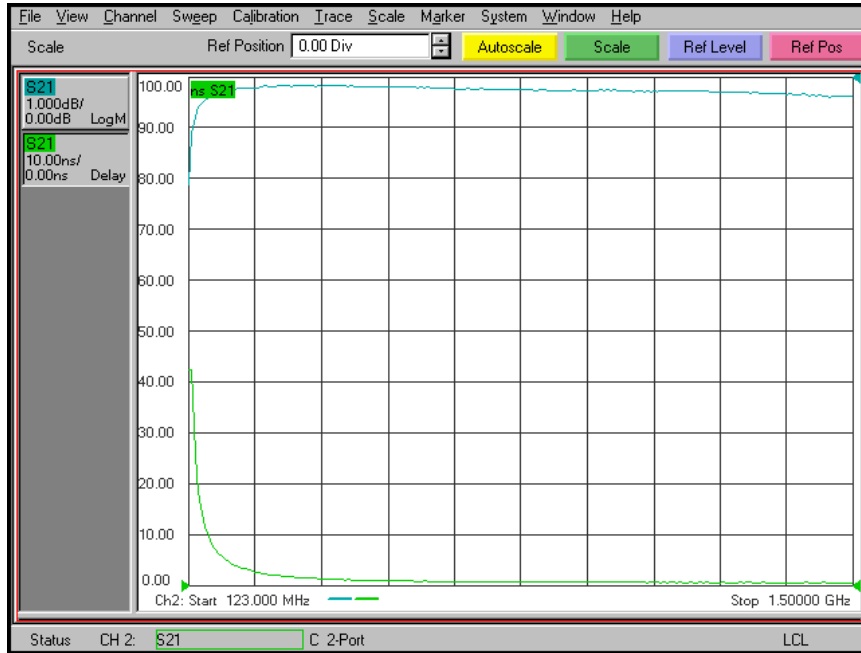

Overall Response (10 dB/div)



KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3094-1

Specifications

Parameter	Specification	Notes
Filter type	Highpass	
Start of Passband <3 dB	124 MHz	
Passband	124 MHz to 1500 MHz	
Stopband Rejection dc to 110 MHz	70 dB min	
Source and Load	50 Ω	

Physical Dimensions

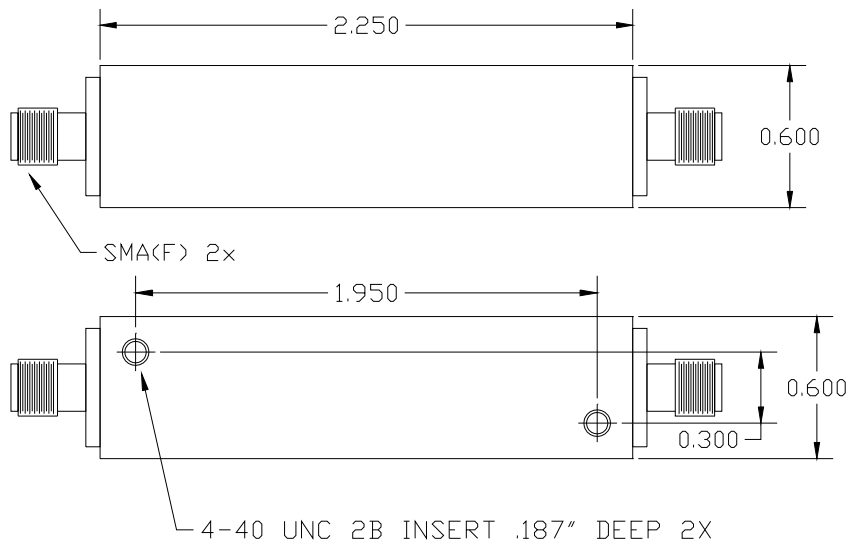

Notes:

1. Dimensions in inches
2. Rectangular case

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982