


Polysnap® Power Inlet Modules **B**BULGIN

IEC Inlet/Outlet - Vertical



- Vertical Module Arrangement
- Snap-in Components
- Inlet Variations (with various tag sizes)
- Filtered Inlet and Blanking Plate options
- Fused

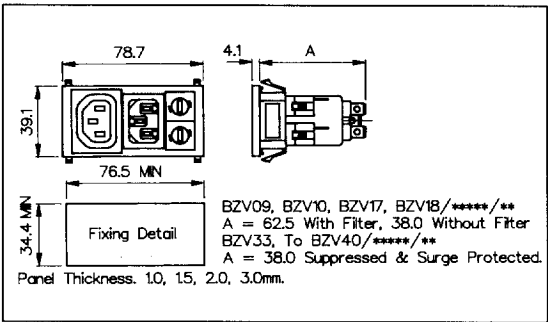

How to Order

BZV **xx** / **xxxxx** / **xx**

Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
Power Inlet (cold condition) and Power Outlet, 2.8 or 6.3mm tabs: 09 = PX0575/63 + PX0695/63 10 = PX0575/28 + PX0695/28 Power Inlet (cold condition) and Shuttered Power Outlet , 2.8 or 6.3mm tabs: 17 = PX0575/63 + PX0783/63 18 = PX0575/28 + PX0783/28 Suppressed Power Inlet (cold condition) and Power Outlet, 2.8 or 6.3mm tabs: 33 = PXS575/63 + PX0695/63 34 = PXS575/28 + PX0695/28 Surge Protected Power Inlet (cold condition) and Power Outlet, 2.8 or 6.3mm tabs: 35 = PXT575/63 + PX0695/63 36 = PXT575/28 + PX0695/28 Suppressed Power Inlet (cold condition) and Shuttered Power Outlet, 2.8 or 6.3mm tabs: 37 = PXS575/63 + PX0783/63 38 = PXS575/28 + PX0783/28 Surge Protected Power Inlet (cold condition) and Shuttered Power Outlet, 2.8 or 6.3mm tabs: 39 = PXT575/63 + PX0783/63 40 = PXT575/28 + PX0783/28	Z0000 = Non Filtered Axxxx = Standard Bxxxx = Medical Cxxxx = High Performance Standard Dxxxx = High Performance Medical Exxxx = Earth Line Choke For Filtered inlet use 6th to 9th characters from filter ordering code see pages 75-79. E.g. BZV09/A0120/04	Twin Fuseholder: 04 = 2 x FX0359 Voltage Selector and Fuseholder: 14 = 1 x VS0001 + 1 x FX0359 Voltage selector and Neon: 37 = 1 x VS0001 + DX0928/110V/Red 38 = 1 x VS0001 + DX0928/110V/Green 39 = 1 x VS0001 + DX0928/250V/Red 40 = 1 x VS0001 + DX0928/250V/Green Fuseholder and Neon: 41 = 1 x FX0359 + DX0928/110V/Red 42 = 1 x FX0359 + DX0928/110V/Green 43 = 1 x FX0359 + DX0928/250V/Red 44 = 1 x FX0359 + DX0928/250V/Green Fuseholder and Blanking Plate: 45 = 1 x FX0359 + Blanking Plate

Note: For technical details of individual components please see page 54