



Dual Output Mixed Voltage, DLV Models

Output Combinations of 3.3V, 2.5V and 1.8V
30 Watt, DC/DC Converters

PRELIMINARY

Features

- Two independently regulated outputs:
3.3V @ 6A, 2.5V @ 7A or 1.8V @ 7A
- 30 Watts total output power
- Available input voltage ranges:
10-18V, 18-36V or 36-75V
- Independent output voltage adjustment
- Remote On/Off Control and Sync pins
- Synchronous rectifier; No load operation
- 2" x 2" package; Industry standard pinout
- IEC950/UL1950/EN60950 certified
- CE mark available (75VIN models)
- Input under and overvoltage shutdown
- Output overvoltage protection
- Thermal shutdown
- Fully Isolated (1500Vdc)

The DLV (Dual Low Voltage) Series from DATEL provides both digital I/O and core logic supply voltages from a single 2" x 2" industry-standard pinout, plastic package. The DLV-3.3/6-2.5/7 provides 3.3V @ 6 Amps and 2.5V @ 7 Amps, the DLV-3.3/6-1.8/7 provides 3.3V @ 6 Amps and 1.8V @ 7 Amps, and the DLV-2.5/7-2.5/7 provides 2.5V @ 7 Amps and 1.8V @ 7 Amps. All models are available with input ranges of 10 to 18V (-D12), 18 to 36V (-D24) or 36 to 75V (-D48).

Plug-in compatibility with a number of converters from other leading manufacturers is possible because DATEL offers these 30 Watt converters with the flexibility to add/remove the sync (pin 3) and higher-voltage trim (pin 5). Each output is independently regulated with its own control loop to provide $\pm 1.0\%$ line and load regulation. Fully synchronous output topology allows no load operation and high efficiencies. Models are available with either positive or negative on/off control and independent output voltage adjustment. "I" suffix models offer independent, "higher-voltage" on/off control for proper power sequencing of core and I/O voltages. Both outputs are internally synchronized to eliminate asynchronous beat frequencies.

All models include input Pi filtering, input overvoltage and undervoltage shutdown circuitry, output overvoltage protection, output short-circuit and current limiting protection and thermal shutdown. These devices meet IEC950, UL1950 and EN6950 safety standards. CB reports are available on request. "-D48" models are CE marked (meet LVD requirements).

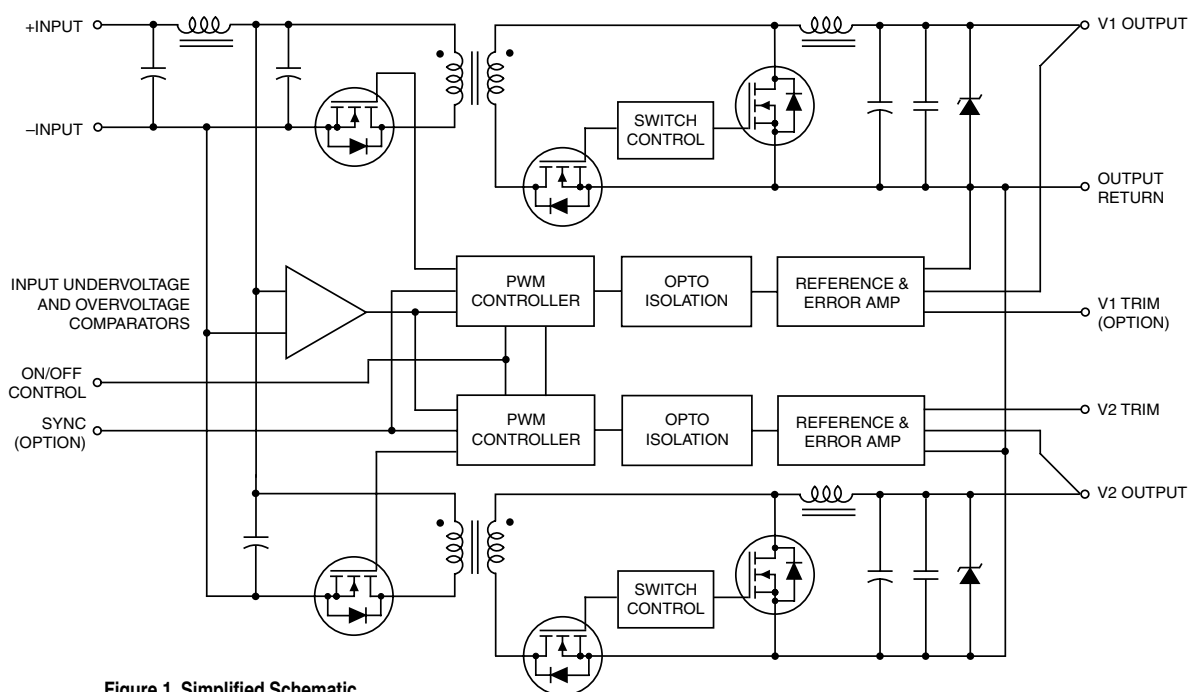


Figure 1. Simplified Schematic

Model	Output						Input			Efficiency		Package (Case, Pinout)
	V _{OUT} (Volts)	I _{OUT} ② (Amps)	R/N (mVp-p) ③		Regulation (Max.)		V _{IN} Nom. (Volts)	Range (Volts)	I _{IN} ⑤ (mA)	Min.	Typ.	
			Typ.	Max.	Line	Load ④						
DLV-2.5/7-1.8/7-D12	2.5	7	75	TBD	±1%	±1%	12	10-18	TBD	TBD	83%	C26, P48
	1.8	7	75	TBD	±1%	±1%						
DLV-2.5/7-1.8/7-D24	2.5	7	75	TBD	±1%	±1%	24	18-36	TBD	TBD	83%	C26, P48
	1.8	7	75	TBD	±1%	±1%						
DLV-2.5/7-1.8/7-D48	2.5	7	75	TBD	±1%	±1%	48	36-75	TBD	TBD	83%	C26, P48
	1.8	7	75	TBD	±1%	±1%						
DLV-3.3/6-1.8/7-D12	3.3	6	75	TBD	±1%	±1%	12	10-18	TBD	TBD	83%	C26, P47
	1.8	7	75	TBD	±1%	±1%						
DLV-3.3/6-1.8/7-D24	3.3	6	75	TBD	±1%	±1%	24	18-36	TBD	TBD	83%	C26, P47
	1.8	7	75	TBD	±1%	±1%						
DLV-3.3/6-1.8/7-D48	3.3	6	75	TBD	±1%	±1%	48	36-75	TBD	TBD	83%	C26, P47
	1.8	7	75	TBD	±1%	±1%						
DLV-3.3/6-2.5/7-D12	3.3	6	75	TBD	±1%	±1%	12	10-18	TBD	TBD	85%	C26, P40
	2.5	7	75	TBD	±1%	±1%						
DLV-3.3/6-2.5/7-D24	3.3	6	75	TBD	±1%	±1%	24	18-36	TBD	TBD	85%	C26, P40
	2.5	7	75	TBD	±1%	±1%						
DLV-3.3/6-2.5/7-D48	3.3	6	75	TBD	±1%	±1%	48	36-75	TBD	TBD	85%	C26, P40
	2.5	7	75	TBD	±1%	±1%						

⑤ Nominal line voltage, no load/balanced full-power condition.

I Suffix Pin 4 independent on/off control of Pin 6 output voltage

* Optional pins

Performance/Functional Specifications

Typical @ $T_A = +25^\circ\text{C}$ under nominal line voltage, balanced "full-load" conditions, unless noted. ①

Input	
Input Voltage Range:	
D12 Models	10-18 Volts (12V nominal)
D24 Models	18-36 Volts (24V nominal)
D48 Models	36-75 Volts (48V nominal)
Overvoltage Shutdown:	
D12 Models	19-23 Volts (21V nominal)
D24 Models	37-42 Volts (40V nominal)
D48 Models	77-81 Volts (79V nominal)
Start-Up Threshold:	
D12 Models	9-10 Volts (9.3V nominal)
D24 Models	16.5-18 Volts (17V nominal)
D48 Models	34.5-36 Volts (35V nominal)
Undervoltage Shutdown:	
D12 Models	8.5-9.6 Volts (9.3V nominal)
D24 Models	16-17 Volts (16.5V nominal)
D48 Models	33-35 Volts (34V nominal)
Input Current:	
Normal Operating Conditions	See Ordering Guide
Standby Mode:	
Off, OV, UV, Thermal Shutdown	10mA typical
Input Reflected Ripple Current:	
Source Impedance	
D12 Models	TBD
D24 Models	TBD
D48 Models	TBD
Internal Input Filter Type	Pi (0.039 μF - 2.2 μH - TBD)
Reverse-Polarity Protection:	
D12 Models	TBD minute duration, 6A maximum
D24 Models	TBD minute duration, 4A maximum
D48 Models	TBD minute duration, 2A maximum
On/Off Control (Pin 4): ③ ④ ⑥	
D12, D24, D48 Models	On = open or TBD to $+V_{IN}$, $I_{IN} = \text{TBD}\mu\text{A}$ @ TBDV Off = 0-0.8V, $I_{IN} = \text{TBD}$ @ 0V
D12N, D24N, D48N Models	On = 0-0.8V, $I_{IN} = \text{TBD}$ @ 0V Off = open or TBD to $+5.5\text{V}$ $I_{IN} = \text{TBD}\mu\text{A}$ @ TBDV
Sync (Option, Pin 3): ③ ④	
Input Threshold (Rising Edge Active)	1-2.7 Volts
Input Voltage Low	0-0.9 Volts
Input Voltage High	2.8-5 Volts
Input Resistance	35k Ω minimum
Output High Voltage (100 μA load)	3.5-4.8 Volts
Output Drive Current	35mA
Input/Output Pulse Width	160-360nsec
Output	
V_{OUT} Accuracy	
2.5V/1.8V Models	1.5% / 2% maximum
3.3V/1.8V Models	1% / 2% maximum
3.3V/2.5V Models	1% / 1.5% maximum
Minimum Loading Per Specification	No load
Ripple/Noise (20MHz BW)	See Ordering Guide
Line/Load Regulation	See Ordering Guide
Efficiency	See Ordering Guide/Efficiency Curves
Trim Range ⑧	$\pm 5\%$ each output
Isolation Voltage:	
Input-to-Output	1500Vdc
Isolation Capacitance	470pF
Isolation Resistance	100M Ω

Output (continued)	
Isolation Resistance	100M Ω
Current Limit Inception:	
2.5/1.8V Models	
2.5V @ 98% V_{OUT}	TBD Amps
1.8V @ 98% V_{OUT}	TBD Amps
3.3/1.8V Models	
3.3V @ 98.5% V_{OUT}	TBD Amps
1.8V @ 98% V_{OUT}	TBD Amps
3.3V/2.5V Models	
3.3V @ 98.5% V_{OUT}	TBD Amps
2.5V @ 98% V_{OUT}	TBD Amps
Short Circuit Current:	
3.3V Outputs	TBD Amps average, continuous
2.5V Outputs	TBD Amps average, continuous
1.8V Outputs	TBD Amps average, continuous
Overvoltage Protection:	Comparator, magnetic feedback
2.5/1.8V Models	TBD/TBD
3.3/1.8V Models	TBD/TBD
3.3/2.5V Models	TBD/TBD
Maximum Capacitive Loading	
2.5/1.8V Models	TBD/TBD μF
3.3/1.8V Models	TBD/TBD μF
3.3/2.5V Models	TBD/TBD μF
Temperature Coefficient	$\pm 0.02\%$ per $^\circ\text{C}$
Dynamic Characteristics	
Dynamic Load Response:	
2.5/1.8V Models	
2.5V (50-100% step to 1.5% V_{OUT})	TBD μsec maximum
1.8V (50-100% step to 2% V_{OUT})	TBD μsec maximum
3.3/1.8V Models	
3.3V (50-100% step to 1% V_{OUT})	TBD μsec maximum
1.8V (50-100% step to 2% V_{OUT})	TBD μsec maximum
3.3V/2.5V Models	
3.3V (50-100% step to 1% V_{OUT})	TBD μsec maximum
2.5V (50-100% step to 1.5% V_{OUT})	TBD μsec maximum
Start-Up Time:	
V_{IN} to V_{OUT}	TBD
On/Off to V_{OUT}	TBD
Switching Frequency	225kHz (\pm TBD kHz)
Environmental	
MTBF	
D12 Models	TBD hours
D24 Models	TBD hours
D48 Models	TBD hours
Operating Temperature (Ambient):	
Without Derating:	
2.5/1.8V Models	
D12 Model	TBD
D24 Model	TBD
D48 Model	TBD
3.3/1.8V Models	
D12 Model	TBD
D24 Model	TBD
D48 Model	TBD
3.3V/2.5V Models	
D12 Model	TBD
D24 Model	TBD
D48 Model	TBD
With Derating	To $+100^\circ\text{C}$ (See Derating Curves)
Case Temperature:	
Maximum Operational	$+100^\circ\text{C}$
For Thermal Shutdown	TBD minimum, TBD maximum
Storage Temperature	-40 to $+120^\circ\text{C}$

Physical	
Dimensions	2" x 2" x 0.5" (50.8 x 50.8 x 12.7mm)
Case Material	Diallyl phthalate, UL94V-0 rated
Pin Material	Brass, solder coated
Weight:	TBD
Primary to Secondary Insulation Level	Operational

- ① All models are specified with external TBD ceramic output capacitors.
- ② See Technical Notes/Graphs for details.
- ③ Devices may be order with opposite polarity. Sync pin available with "S" suffix. See Part Number Suffixes and Technical Notes for details.
- ④ Applying a voltage to On/Off Control (pin 4) or the Sync (pin 3) when no input power is applied to the converter may cause permanent damage.
- ⑤ Output noise may be further reduced with the installation of additional external output capacitors. See Technical Notes.
- ⑥ On/Off control is designed to be driven with open collector or by appropriate voltage levels. Voltages must be referenced to the -Input (pin 2).
- ⑦ Demonstrated MTBF available on request.
- ⑧ Trim function for the higher of two voltages available with "T" suffix. See Part Number Suffixes and Technical Notes for details.

Absolute Maximum Ratings

Input Voltage:

Continuous:	D12 Models	23 Volts
	D24 Models	42 Volts
	D48 Models	81 Volts
Transient (100msec):	D12 Models	25 Volts
	D24 Models	50 Volts
	D48 Models	100 Volts

Input Reverse-Polarity Protection ②

	Input Current must be limited. TBD minute duration. Fusing recommended.
D12A Models	6 Amps
D24A Models	4 Amps
D48A Models	2 Amps

Output Current ②

Current limited. Devices can withstand an indefinite output short circuit.

On/Off Control (Pin 4) Max. Voltages

Referenced to -Input (pin 2)	
No Suffix	+VIN
"N" Suffix	+8 Volts

Sync Control (Pin 3) Max. Voltages

"S" Suffix	+5.7 Volts
------------	------------

Storage Temperature

	-40 to +120°C
--	---------------

Lead Temperature (Soldering, 10 sec.)

	+300°C
--	--------

These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability. Proper operation under conditions other than those listed in the Performance/Functional Specifications Table is not implied, nor recommended.

TECHNICAL NOTES

Trimming Output Voltages

These DLV converters have a trim capability (pins 9 & 5) that allow users to independently adjust the output voltages $\pm 5\%$. (Note: pin 5 is an option, see ordering information.) Adjustments to the output voltages can be accomplished via a trim pot, Figure 2, or a single fixed resistor as shown in Figures 3 and 4. A single fixed resistor can increase or decrease the output voltage depending on its connection. Fixed resistors should have absolute TCR's less than 100ppm/°C to minimize sensitivity to changes in temperature.

A single resistor connected from the Trim pin 9 to +Output (pin 8), see Figure 3, will decrease the lower output voltage. A resistor connected from Trim pin 9 to Output Return (pin 7) will increase the lower output voltage. See Figure 4.

Similarly, the higher output voltage can be adjusted using a single resistor connected from the Trim (pin 5) to +Output (pin 6) or to Output Return (pin 7). See Figures 3 and 4.

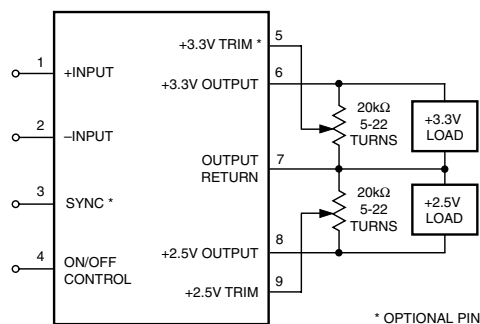


Figure 2. Trim Connections Using A Trim Pot

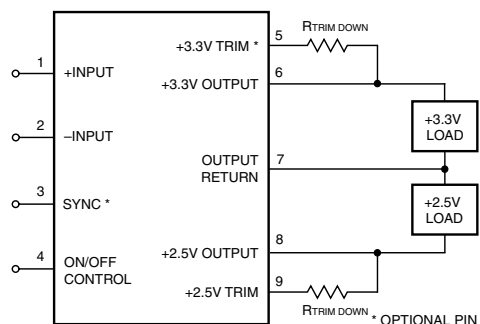


Figure 3. Trim Connections To Decrease Output Voltages Using Fixed Resistors

3.3 Volt Trim Down

$$R_{T_DOWN} (k\Omega) = \left[\frac{3.48(V_O - 1.577)}{3.3 - V_O} \right] - 28.7$$

2.5 Volt Trim Down

$$R_{T_DOWN} (k\Omega) = \left[\frac{2.41(V_O - 1.18)}{2.5 - V_O} \right] - 19.7$$

1.8 Volt Trim Down

$$R_{T_DOWN} (k\Omega) = \left[\frac{1.73(V_O - 0.86)}{1.8 - V_O} \right] - 14.17$$

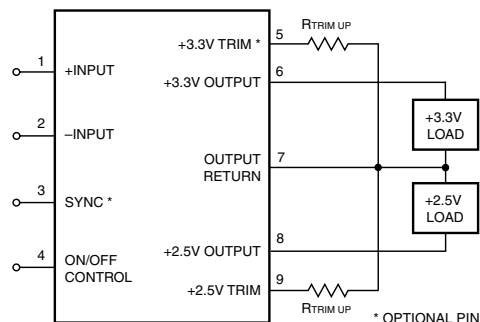


Figure 4. Trim Connections To Increase Output Voltages Using Fixed Resistors

3.3 Volt Trim Up

$$R_{TUP} (k\Omega) = \left[\frac{2.84}{V_o - 2.5} \right] - 19.7$$

2.5 Volt Trim Up

$$R_{TUP} (k\Omega) = \left[\frac{5.88}{V_o - 3.3} \right] - 28.7$$

1.8 Volt Trim Up

$$R_{TUP} (k\Omega) = \left[\frac{1.49}{V_o - 1.8} \right] - 14.17$$

Note: Resistor values are in k Ω . Accuracy of adjustment is subject to tolerances of resistors and factory-adjusted output accuracy.
V_o = desired output voltage.

PART NUMBER STRUCTURE

DLV - 3.3 / 6 - 2.5 / 7 - D48 T S N I

Dual Low Voltage/
Mixed-Voltage Series

V₁ Nominal Output Voltage

I₁ Maximum Output Current

V₂ Nominal Output Voltage

Add T, S, N and I suffixes
as desired

Input Voltage Range:

D12 = 10-18 Volts (12V nominal)

D24 = 18-36 Volts (24V nominal)

D48 = 36-75 Volts (48V nominal)

I₂ Maximum Output Current

Part Number Suffixes

Standard DLV DC/DC's provide a Trim function (Pin 9) for the lower of the two output voltages. A Trim pin (Pin 5) for the higher voltage can be added by indicating a "T" suffix. A Sync pin can also be added and is indicated by an "S" suffix. An "N" suffix indicates that the On/Off Control function incorporates negative polarity logic. An "I" suffix provides independent on/off control (Pin 4) for the higher output voltage.

No Suffix Pins 3 & 5 not installed, positive polarity On/Off Control

T Suffix Pin 5 added for higher voltage Trim option

S Suffix Pin 3 added for Sync Option

N Suffix Negative polarity On/Off Control

I Suffix Pin 4 independent on/off control of Pin 6 output voltage

Ordering Information

Higher Voltage Trim (Pin 5 Installed)	Sync Function (Pin 3 Installed)	Positive/Negative Logic	Control of "Higher" Output Voltage (Via Pin 4)	Independent On/Off Control, Both Outputs (Via Pin 4)	Suffix
No	No	Positive	No	Yes	No Suffix
			Yes	No	I
		Negative	No	Yes	N
	Yes	Positive	Yes	No	NI
			No	Yes	S
		Negative	No	No	SI
Yes	No	Positive	Yes	Yes	SN
			No	No	SNI
		Negative	Yes	Yes	T
	Yes	Positive	Yes	No	TI
			No	Yes	TN
		Negative	Yes	No	TNI
	Yes	Positive	No	Yes	TS
			Yes	No	TSI
		Negative	No	Yes	TSN
			Yes	No	TSNI



ISO 9001 REGISTERED

DS-0490 12/00

DATEL, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151
Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356
Internet: www.datel.com Email: sales@datel.com

DATEL (UK) LTD. Tadley, England Tel: (01256)-880444
DATEL S.A.R.L. Montigny Le Bretonneux, France Tel: 01-34-60-01-01
DATEL GmbH München, Germany Tel: 89-544334-0
DATEL KK Tokyo, Japan Tel: 3-3779-1031, Osaka Tel: 6-6354-2025

DATEL makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. The DATEL logo is a registered DATEL, Inc. trademark.