

SANYO

No.1600A

2SA1318/2SC3331

PNP/NPN Epitaxial Planar Silicon Transistors

AF Amp Applications**Use**

- . Capable of being used in the low frequency to high frequency range.

Features

- . Large current capacity and wide ASO.

(): 2SA1318

Absolute Maximum Ratings at $T_a=25^{\circ}\text{C}$

			unit
Collector to Base Voltage	V_{CB0}	(-)60	V
Collector to Emitter Voltage	V_{CE0}	(-)50	V
Emitter to Base Voltage	V_{EB0}	(-)6	V
Collector Current	I_C	(-)200	mA
Collector Current (Pulse)	I_{CP}	(-)400	mA
Collector Dissipation	P_C	500	mW
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^{\circ}\text{C}$

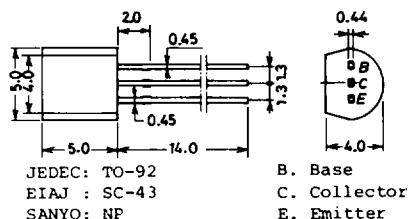
Electrical Characteristics at $T_a=25^{\circ}\text{C}$

			min	typ	max	unit
Collector Cutoff Current	I_{CB0}	$V_{CB}=(-)40\text{V}, I_E=0$			(-)0.1	μA
Emitter Cutoff Current	I_{EB0}	$V_{EB}=(-)5\text{V}, I_C=0$			(-)0.1	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=(-)6\text{V}, I_C=(-)1\text{mA}$	100 [*] (100)		800 [*] (560)	
	$h_{FE(2)}$	$V_{CE}=(-)6\text{V}, I_C=(-)0.1\text{mA}$	70			
Gain-Bandwidth Product	f_T	$V_{CE}=(-)6\text{V}, I_C=(-)10\text{mA}$		200		MHz
Output Capacitance	c_{ob}	$V_{CB}=(-)6\text{V}, f=1\text{MHz}$		3.0 (4.5)		pF

Continued on next page.

* The 2SA1318/2SC3331 are classified by 1mA h_{FE} as follows:

2SA1318	100	R	200	140	S	280	200	T	400	280	U	560	
2SC3331	100	R	200	140	S	280	200	T	400	280	U	560	400 V 800

Case Outline 2003A
(unit:mm)

Specifications and information herein are subject to change without notice.

SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg. 1-10-1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

Continued from preceding page.

			min	typ	max	unit
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=(-)100mA$, $I_B=(-)10mA$			(-)0.3	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=(-)100mA$, $I_B=(-)10mA$			(-)1.0	V
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=(-)10\mu A$, $I_E=0$	(-)60			V
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=(-)1mA$, $R_{BE}=\infty$	(-)50			V
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=(-)10\mu A$, $I_C=0$	(-)6			V

