
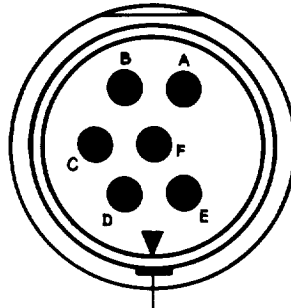


LMG CONNECTORS SHELL SIZE 3

6 contacts 19 amp 2.5 kV, D.C. or A.C. peak

Plug face
orientation
positions

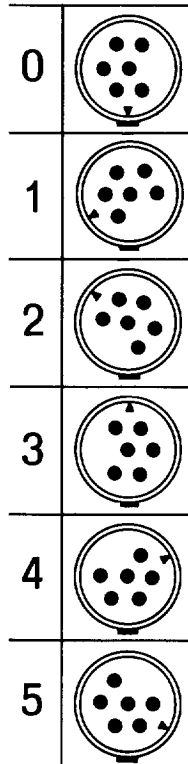

Datum keyway/key


IMPORTANT

ONLY
SHELL SIZE 3 CODES g, h & i
ACCESSORIES MAY BE USED WITH
THESE CONNECTORS

ALUMINIUM	LMG Pt. No.	B.S. Pt. No.
Free Socket	LMG/1/07012/220	C2105-306-F00
Free Plug	LMG/1/07032/220	C2105-306-M00
Fixed Plug (<i>Round Flange</i>)	LMG/1/07072/220	C2106-306-M00
Free Coupler Plug	LMG/1/07112/220	C2107-306-M00
Fixed Socket (<i>Round Flange</i>)	LMG/1/07052/220	C2106-306-F00
Free Coupler Socket	LMG/1/07092/220	C2107-306-F00

BRASS	LMG Pt. No.	B.S. Pt. No.
Free Socket	LMG/1/07212/220	C2154-306-F00
Free Plug	LMG/1/07232/220	C2154-306-M00
Fixed Plug (<i>Round Flange</i>)	LMG/1/07352/220	C2157-306-M00
Fixed Plug (<i>Square Flange</i>)	LMG/1/07272/220	C2155-306-M00
Free Coupler Plug	LMG/1/07312/220	C2156-306-M00
Fixed Socket (<i>Round Flange</i>)	LMG/1/07332/220	C2157-306-F00
Fixed Socket (<i>Square Flange</i>)	LMG/1/07252/220	C2155-306-F00
Free Coupler Socket	LMG/1/07292/220	C2156-306-F00

Mating combinations

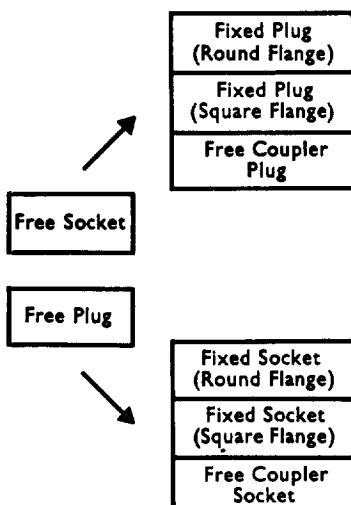

To specify orientated versions:-

LMG: replace last digit with digit of relevant position number
e.g. LMG/1/07012/225 = orientation position 5.

BS: replace penultimate digit with digit of relevant position number
e.g. C2105-306-F50 = orientation position 5.