

SIEMENS

DUAL CHANNEL ILD32 QUAD CHANNEL ILQ32

PHOTODARLINGTON OPTOCOUPLER

FEATURES

- Very High Current Transfer Ratio, 500% Min.
- Isolation Test Voltage, 5300 VAC_{RMS}
- High Isolation Resistance, $10^{11} \Omega$ Typical
- Low Coupling Capacitance
- Standard Plastic DIP Package
- Underwriters Lab File #E52744
-  VDE 0884 Available with Option 1

Maximum Ratings (Each Channel)

Emitter

Peak Reverse Voltage	3 V
Continuous Forward Current	60 mA
Power Dissipation at 25°C	100 mW
Derate Linearly from 25°C	1.33 mW/°C

Detector

Collector-Emitter Breakdown Voltage	30 V
Collector (Load) Current	125 mA
Power Dissipation at 25°C Ambient	150 mW
Derate Linearly from 25°C	2.0 mW/°C

Package

Isolation Test Voltage (between emitter and detector referred to standard climate 23°C/50%RH, DIN 50014) (t=1 sec.)	5300 VAC _{RMS}
Creepage	7 mm min.
Clearance	7 mm min.
Comparative Tracking Index per DIN IEC 112/VDE303, part 1	≥175
Isolation Resistance	
$V_{IO}=500V, T_A=25^\circ C$	$R_{IO}=10^{12} \Omega$
$V_{IO}=500V, T_A=100^\circ C$	$R_{IO}=10^{11} \Omega$
Total Dissipation at 25°C Ambient	
ILD32	400 mW
ILQ32	500 mW
Derate Linearly from 25°C	
ILD32	5.33 mW/°C
ILQ32	6.67 mW/°C
Storage Temperature	-55°C to +150°C
Operating Temperature	-55°C to +100°C
Lead Soldering Time at 260°C	10 sec.


DESCRIPTION

The ILD32/ILQ32 are optically coupled isolators with a Gallium Arsenide infrared LED and a silicon photodarlington sensor. Switching can be achieved while maintaining a high degree of isolation between driving and load circuits. These optocouplers can be used to replace reed and mercury relays with advantages of long life, high speed switching and elimination of magnetic fields.


The ILD32 has two isolated channels in a DIP package, and the ILQ32 has four channels. These devices can be used to replace 4N32s or 4N33s in applications calling for several single channel optocouplers on a board.

Package Dimensions in Inches (mm)

ILD32 (Dual Channel)

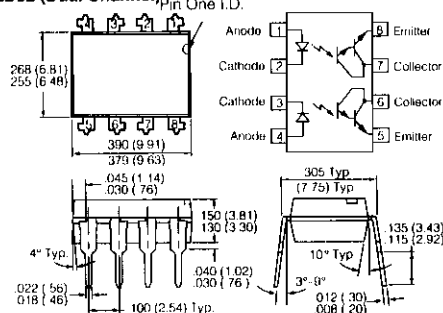

ILQ32 (Quad Channel)

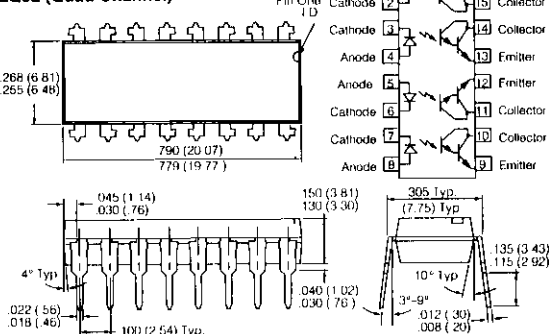

Electrical Characteristics ($T_A=25^\circ C$)

	Symbol	Min.	Typ.	Max.	Unit	Condition
Emitter						
Forward Voltage	V_F	1.25	1.5		V	$I_F=10 \text{ mA}$
Reverse Current	I_R	0.1	100		μA	$V_R=3.0 \text{ V}$
Capacitance	C_O	25			pF	$V_R=0 \text{ V}$
Detector						
Breakdown Voltage						
Collector-Emitter	BV_{CEO}	30			V	$I_C=100 \mu A, I_F=0$
Emitter-Collector	BV_{ECO}	5	10		V	$I_E=100 \mu A$
Collector-Emitter Leakage Current	I_{CFO}	1.0	100		nA	$V_{CE}=10 \text{ V}, I_F=0$
Package						
Current Transfer Ratio	CTR	500			%	$I_F=10 \text{ mA}, V_{CE}=10 \text{ V}$
Collector-Emitter						
Saturation Voltage	V_{CEsat}		1.0		V	$I_C=2 \text{ mA}, I_F=8 \text{ mA}$
Isolation Capacitance	C_{ISOL}	0.5			pF	
Turn-On Time	t_{on}	15			μs	$V_{CC}=10 \text{ V}, I_F=5 \text{ mA}, R_L=100 \Omega$
Turn-Off Time	t_{off}	30			μs	

Figure 1. Forward voltage versus forward current

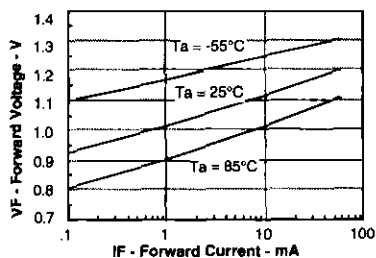


Figure 2. Normalized non-saturated and saturated CTR_{ce} at $T_A = 25^\circ\text{C}$ versus LED current

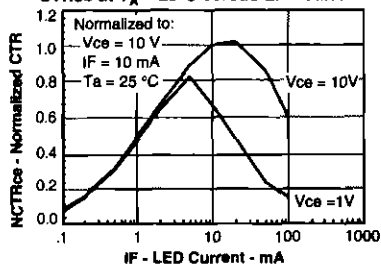


Figure 3. Normalized non-saturated and saturated collector-emitter current versus LED current

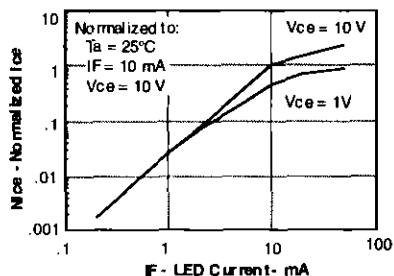


Figure 4. Low to high propagation delay versus collector load resistance and LED current

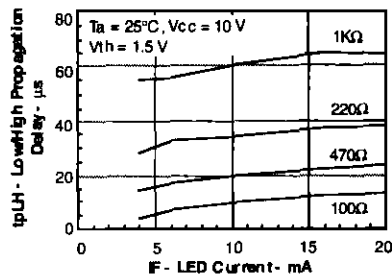


Figure 5. High to low propagation delay versus collector load resistance and LED current

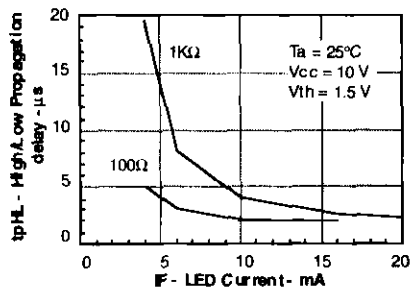


Figure 6. Switching timing

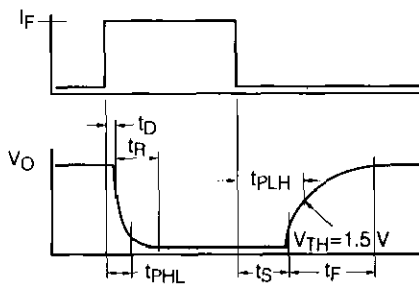


Figure 7. Switching schematic

