


MIL-A-3933/25

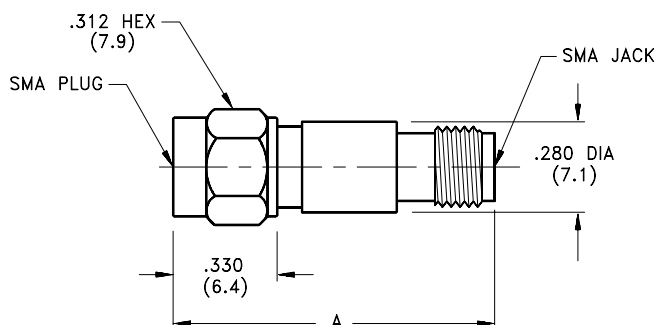

MILITARY PART NO.	MIDWEST PART NO.	DIMENSION A INCHES (mm) (max)	ATTENUATION VALUE (dB) (nom)	FREQUENCY RANGE (GHz)	COMMERCIAL ALTERNATE
- 41	M3933/25-41N	0.94 (23.9)	15	DC - 12.4	ATT-0291-15-SMA-02
- 42	M3933/25-42N	0.94 (23.9)	16	DC - 12.4	ATT-0291-16-SMA-02
- 43	M3933/25-43N	0.94 (23.9)	17	DC - 12.4	ATT-0291-17-SMA-02
- 44	M3933/25-44N	0.94 (23.9)	18	DC - 12.4	ATT-0291-18-SMA-02
- 45	M3933/25-45N	0.94 (23.9)	19	DC - 12.4	ATT-0291-19-SMA-02
- 46	M3933/25-46N	1.02 (26.0)	20	DC - 12.4	ATT-0291-20-SMA-02
- 47	M3933/25-47N	1.02 (26.0)	21	DC - 12.4	ATT-0291-21-SMA-02
- 48	M3933/25-48N	1.02 (26.0)	22	DC - 12.4	ATT-0291-22-SMA-02
- 49	M3933/25-49N	1.02 (26.0)	23	DC - 12.4	ATT-0291-23-SMA-02
- 50	M3933/25-50N	1.02 (26.0)	24	DC - 12.4	ATT-0291-24-SMA-02
- 51	M3933/25-51N	1.02 (26.0)	25	DC - 12.4	ATT-0291-25-SMA-02
- 52	M3933/25-52N	1.02 (26.0)	30	DC - 12.4	ATT-0291-30-SMA-02
- 53	M3933/25-53N	1.02 (26.0)	35	DC - 12.4	ATT-0291-35-SMA-02
- 54	M3933/25-54N	1.02 (26.0)	40	DC - 12.4	ATT-0291-40-SMA-02
- 58	M3933/25-58N	0.86 (21.9)	0	DC - 18.0	ATT-0290-00-SMA-02
- 59	M3933/25-59N	0.86 (21.9)	.5	DC - 18.0	ATT-0290-70-SMA-02
- 60	M3933/25-60N	0.86 (21.9)	1	DC - 18.0	ATT-0290-01-SMA-02
- 61	M3933/25-61N	0.86 (21.9)	1.5	DC - 18.0	ATT-0290-71-SMA-02
- 62	M3933/25-62N	0.86 (21.9)	2	DC - 18.0	ATT-0290-02-SMA-02
- 63	M3933/25-63N	0.86 (21.9)	2.5	DC - 18.0	ATT-0290-72-SMA-02
- 64	M3933/25-64N	0.86 (21.9)	3	DC - 18.0	ATT-0290-03-SMA-02
- 65	M3933/25-65N	0.86 (21.9)	3.5	DC - 18.0	ATT-0290-73-SMA-02
- 66	M3933/25-66N	0.86 (21.9)	4	DC - 18.0	ATT-0290-04-SMA-02
- 67	M3933/25-67N	0.86 (21.9)	4.5	DC - 18.0	ATT-0290-74-SMA-02
- 68	M3933/25-68N	0.86 (21.9)	5	DC - 18.0	ATT-0290-05-SMA-02
- 69	M3933/25-69N	0.86 (26.0)	5.5	DC - 18.0	ATT-0290-75-SMA-02

Notes:

1. Midwest Microwave part number reflects a non-screened part. For a screened part, change suffix "N" to "S".
2. See Appendix for description of connector interface.